

## UTILITIES / AUTHORITIES

GAS SERVICE  
ELIZABETHTOWN GAS COMPANY  
520 GREEN LANE, UNION, NJ 7083  
PHONE: (908) 662-8321  
CONTACT: GREGORY J. BALINT

CABLE SERVICE  
COMCAST CABLEVISION OF NJ  
800 RAHWAY AVENUE, UNION, NJ 07083  
PHONE: (908) 851-2258  
CONTACT: GEORGE PALYCA

ELECTRIC SERVICE  
PUBLIC SERVICE ELECTRIC AND GAS COMPANY  
472 WESTON CANAL ROAD, SOMERSET, NJ 08873  
PHONE: (732) 764-3067  
CONTACT: JOHN GRABENSTEIN

**WATER SERVICE**  
**NEW JERSEY AMERICAN WATER COMPANY**  
**1341 NORTH AVENUE, PLAINFIELD, NJ 07061**  
**PHONE: (908) 791-3456**  
**CONTACT: MICHAEL F. BANGE**

TELEPHONE SERVICE  
VERIZON COMMUNICATIONS  
290 W. MT PLEASANT AVENUE, LIVINGSTON, NJ 07039  
PHONE: (973) 422-5156  
CONTACT: DARREN CRAY

SEWER SERVICES  
TWP OF CRANFORD SEWER DEPARTMENT  
ROUND HOUSE, 364 NORTH AVENUE  
PHONE: (908) 709-7217  
CONTACT: ERIK HASTRUP

RAHWAY VALLEY SEWERAGE AUTHORITY  
1050 EAST HAZELWOOD AVENUE, RAHWAY, NJ 07065  
PHONE: (732) 388-0868  
CONTACT: JOHN BUONOCORE

TOWNSHIP OF CRANFORD

PATRICK GIBLIN, MAYOR  
KATHLEEN MILLER PRUNTY, DEPUTY  
MAYOR/COMMISSIONER


THOMAS H. HANNEN, JR., COMMISSIONER  
JEAN-ALBERT MAISONNEUVE, COMMISSIONER  
MARY O'CONNOR, COMMISSIONER

PATRICIA DONAHUE, TOWNSHIP CLERK  
JAMIE CRYAN, TOWNSHIP ADMINISTRATOR

## INDEX OF SHEETS



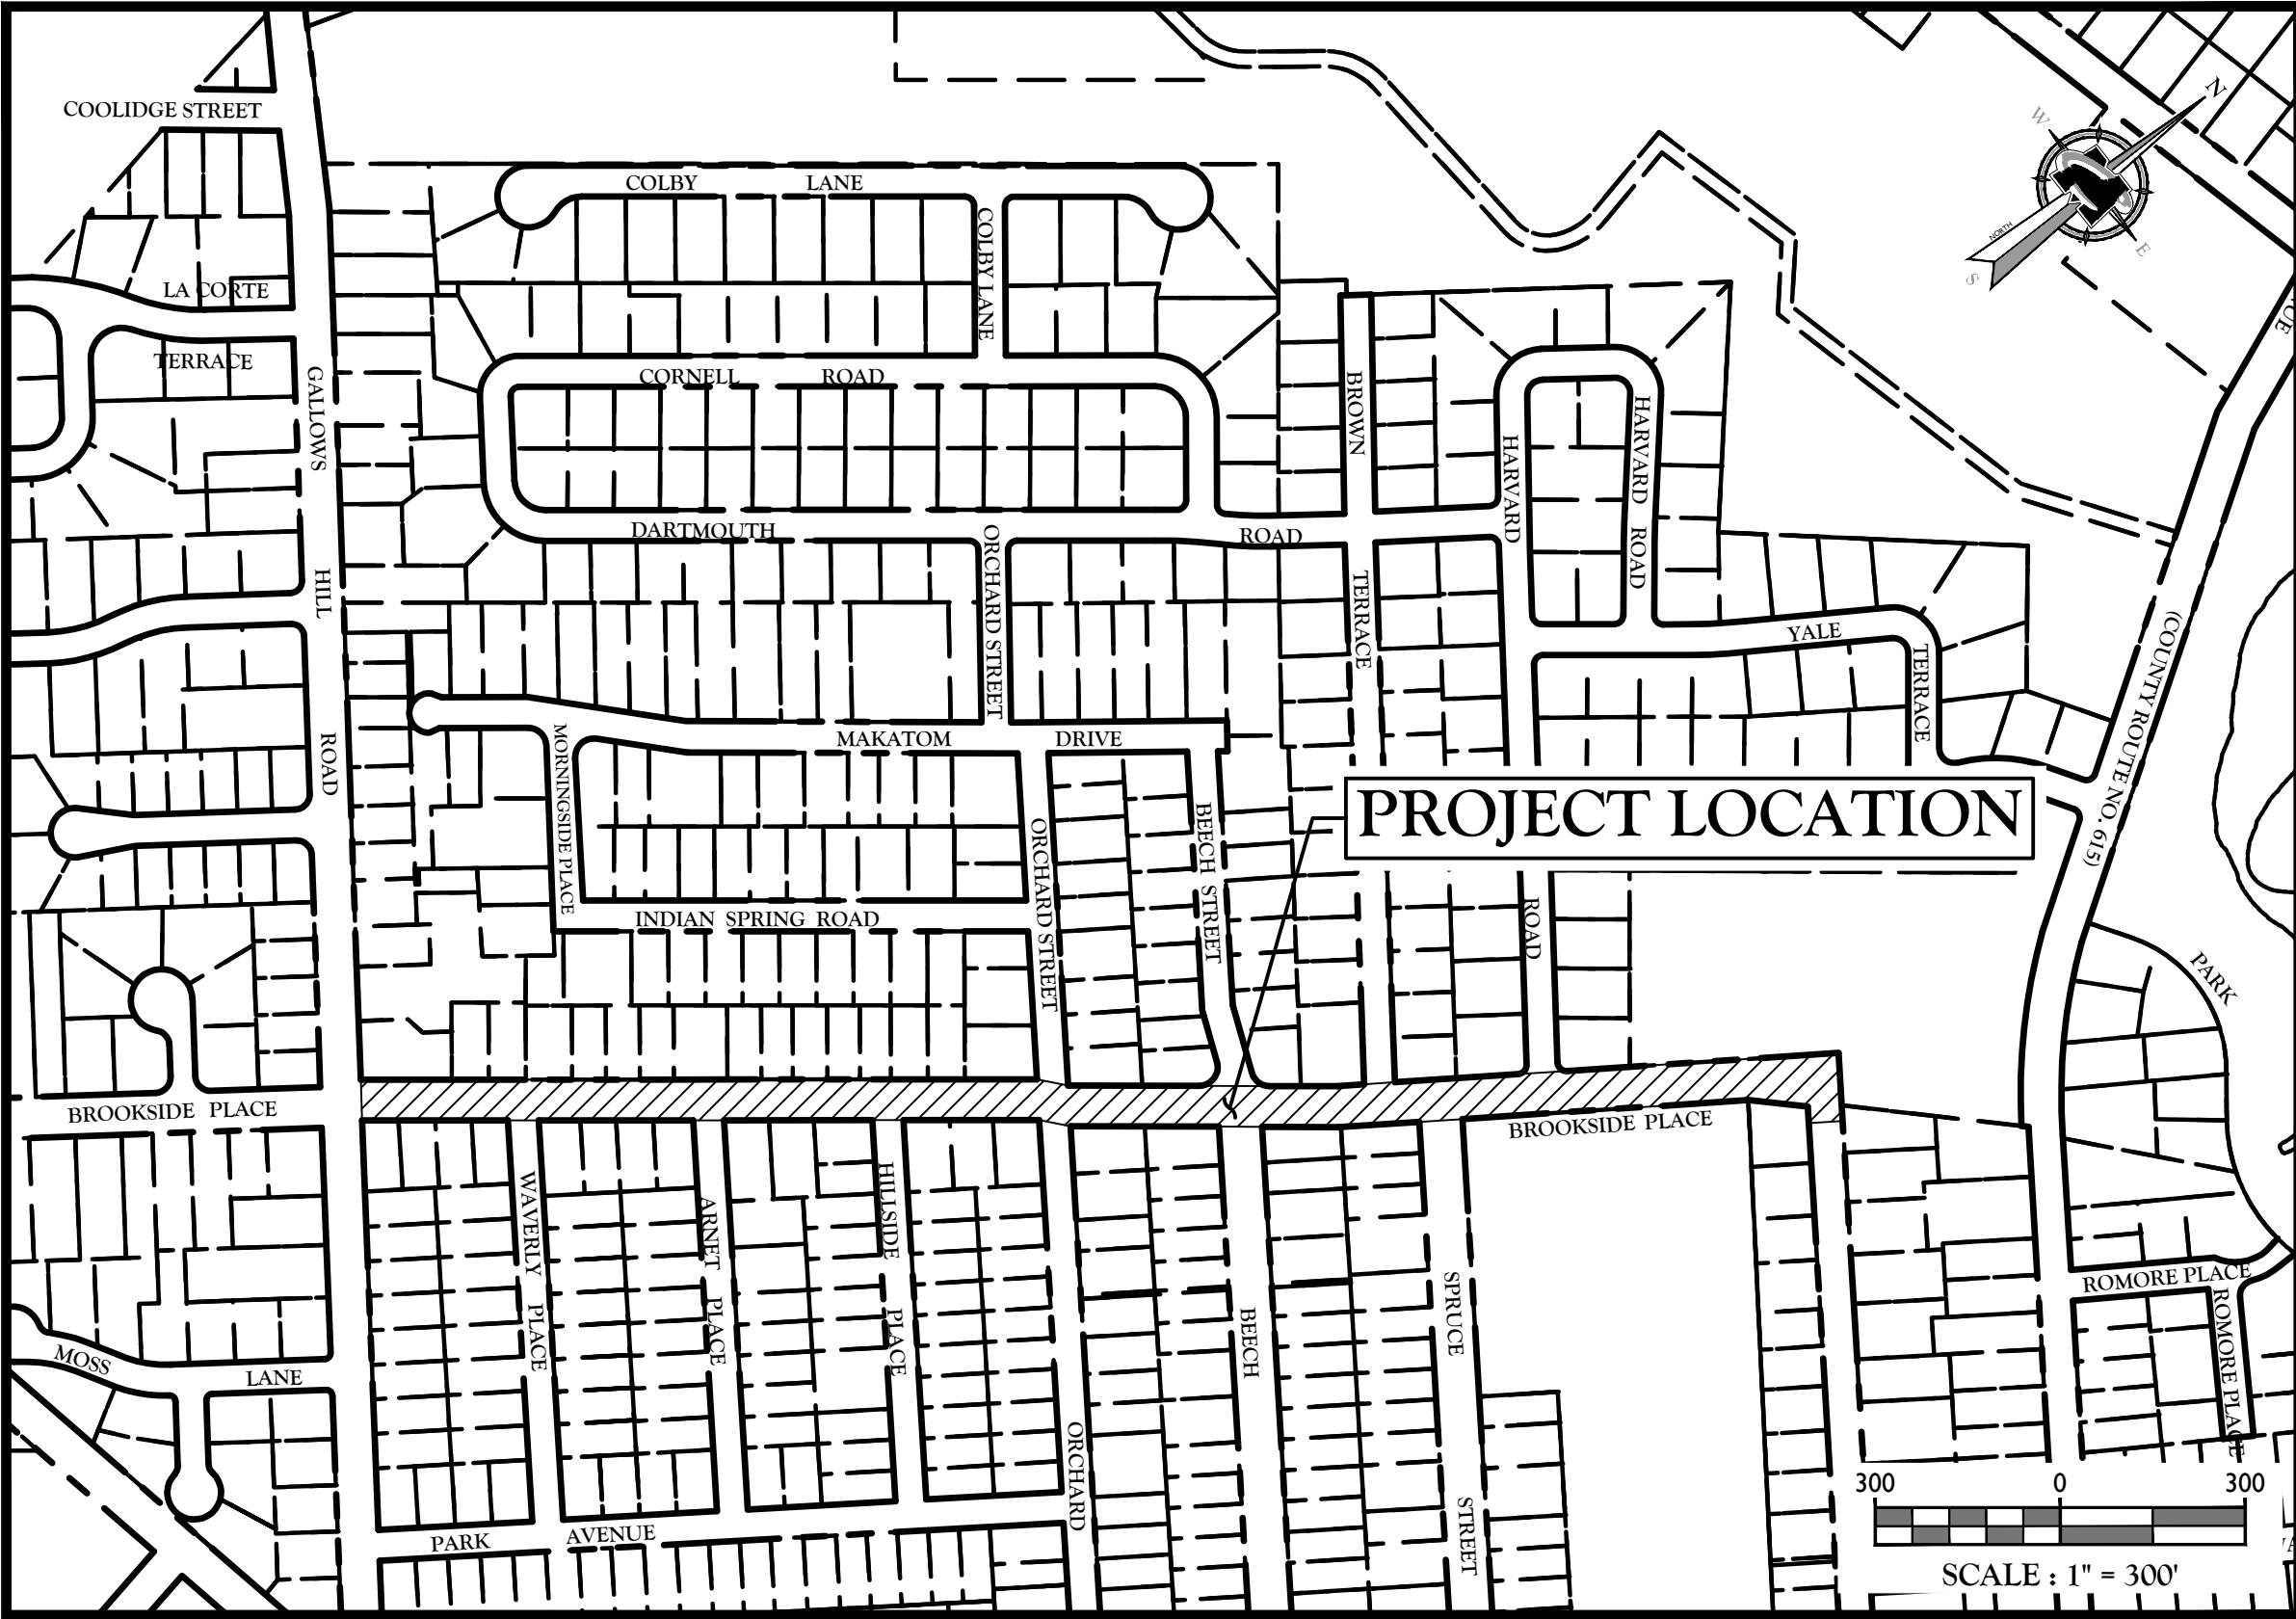

SHT. No.	DESCRIPTION
1	COVER
2	GENERAL NOTES & QUANTITIES
3 - 5	EXISTING CONDITIONS PLAN
6 - 9	DIMENSION PLAN
10 - 15	CROSS SECTIONS
16 - 17	FULL DEPTH RECONSTRUCTION MAP
18 - 21	CONSTRUCTION DETAILS
22 - 25	NJDOT TRAFFIC CONTROL DETAILS
26 - 36	NJDOT CONSTRUCTION DETAILS

CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 - BROOKSIDE PLACE  
DRAINAGE IMPROVEMENTS  
TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
NEW JERSEY



## KEY MAP

NEW JERSEY DEPARTMENT OF TRANSPORTATION STANDARD  
SPECIFICATIONS 2019 WITH AMENDMENTS THERETO SHALL GOVERN

 <b>MASER</b> CONSULTING P.A. Customer Loyalty through Client Satisfaction <a href="http://www.maserconsulting.com">www.maserconsulting.com</a>									
Office Locations:									
<ul style="list-style-type: none"> <li>■ NEW JERSEY</li> <li>■ NEW YORK</li> <li>■ PENNSYLVANIA</li> <li>■ VIRGINIA</li> <li>■ FLORIDA</li> <li>■ NORTH CAROLINA</li> </ul>	<ul style="list-style-type: none"> <li>■ NEW MEXICO</li> <li>■ MARYLAND</li> <li>■ GEORGIA</li> <li>■ TEXAS</li> <li>■ TENNESSEE</li> <li>■ COLORADO</li> </ul>								
State of N.J. C.O.A.: 24GA27986500									
<p><small>Copyright © 2021: Maser Consulting, All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting, P.A.</small></p>									
 <b>PROTECT YOURSELF</b> ALL STATES REQUIRE NOTIFICATION OF EXCAVATORS, DESIGNERS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE									
<p>Know what's below. Call before you dig.</p> <p>FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: <a href="http://WWW.CALL811.COM">WWW.CALL811.COM</a></p>									
 <b>CARL P. O'BRIEN</b> NEW JERSEY PROFESSIONAL ENGINEER - LICENSE NUMBER: G645154									
<h2>CONSTRUCTION PLANS</h2> <p>FOR</p> <h1>NJDOT FY 2019 - BROOKSIDE PLACE DRAINAGE IMPROVEMENTS</h1>									
<h3>TOWNSHIP OF CRANFORD COUNTY OF UNION STATE OF NEW JERSEY</h3>									
<div style="display: flex; justify-content: space-between;"> <div style="width: 30%;">  </div> <div style="width: 65%;"> <p><b>MT. ARLINGTON OFFICE</b>              400 Valley Road Suite 304              Mount Arlington, NJ 07856              Phone: 973.398.3110 Fax: 973.398.3199</p> </div> </div>									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 25%;">SCALE</th> <th style="width: 25%;">DATE</th> <th style="width: 25%;">DRAWN BY:</th> <th style="width: 25%;">CHECKED BY:</th> </tr> <tr> <td>AS SHOWN</td> <td>1/30/20</td> <td>BAK</td> <td>PWJ</td> </tr> </table>		SCALE	DATE	DRAWN BY:	CHECKED BY:	AS SHOWN	1/30/20	BAK	PWJ
SCALE	DATE	DRAWN BY:	CHECKED BY:						
AS SHOWN	1/30/20	BAK	PWJ						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 50%;">PROJECT NUMBER:</th> <th style="width: 50%;">DRAWING NAME:</th> </tr> <tr> <td>CDT065</td> <td>C-COVER</td> </tr> </table>		PROJECT NUMBER:	DRAWING NAME:	CDT065	C-COVER				
PROJECT NUMBER:	DRAWING NAME:								
CDT065	C-COVER								
<p>SHEET TITLE:</p> <p style="text-align: center; font-size: 1.2em;"><b>COVER</b></p>									
<p>SHEET NUMBER:</p> <p style="text-align: center; font-size: 1.2em;">I of 36</p>									



SURVEY NOTES:

- EXISTING FEATURES SHOWN ON THIS PLAN WERE BASED ON INFORMATION FROM THE SURVEY ENTITLED "TOPOGRAPHIC SURVEY FOR BROOKSIDE PLACE" DATED 10/02/19, FOR THE TOWNSHIP OF CRANFORD, PREPARED BY MASER CONSULTING P.A., LAST REVISED 1/1/4/19.
- SUPPLEMENTAL WATER LINE INFORMATION WAS BASED ON INFORMATION FROM THE PLAN ENTITLED "BROOKSIDE PLACE PHASE 2 - MAIN REPLACEMENT" DATED 6/19/19, FOR THE TOWNSHIP OF CRANFORD, PREPARED BY NEW JERSEY AMERICAN WATER.
- SUPPLEMENTAL GAS LINE INFORMATION WAS BASED ON INFORMATION FROM THE PLAN ENTITLED "BROOKSIDE PLACE SURVEY CRANFORD" DATED 2/26/19, FOR THE TOWNSHIP OF CRANFORD, PREPARED BY ELIZABETH TOWN GAS.
- THE HORIZONTAL POSITION OF THIS SURVEY IS BASED ON GPS OBSERVATIONS TIED TO THE KEYNET VIRTUAL REFERENCE STATION SYSTEM RELATIVE TO THE NEW JERSEY STATE PLANE COORDINATE SYSTEM, NAD 83. THE VERTICAL POSITION OF THE HEREON SURVEY IS BASED ON GPS OBSERVATIONS TIED TO THE KEYNET VIRTUAL REFERENCE STATION SYSTEM, ADJUSTED AND RELATIVE TO THE NORTH AMERICAN DATUM (NAVD 88).
- ALL RIGHT-OF-WAY LINES, PROPERTY LINES, AND EASEMENTS ARE APPROXIMATE AND BASED UPON TAX MAPS.
- THE LOCATION OF ALL UNDERGROUND UTILITIES AS SHOWN HEREON ARE APPROXIMATE AND ARE BASED ON VISIBLE ABOVE GROUND STRUCTURES AND UTILITY MARK OUTS. NO EXCAVATIONS WERE MADE DURING THE PROGRESS OF THIS SURVEY TO LOCATE BURIED UTILITIES/STRUCTURES. ADDITIONAL BURIED UTILITIES/STRUCTURES MAY BE ENCOUNTERED. THE CONTRACTOR SHALL HAVE ALL UNDERGROUND UTILITIES FIELD VERIFIED BY THE PROPER UTILITY COMPANIES BEFORE ANY CONSTRUCTION BEGINS.

GENERAL NOTES:

- ALL MATERIALS, WORKMANSHIP, AND CONSTRUCTION RELATED TO THE PROPOSED IMPROVEMENTS SHOWN HEREIN SHALL BE IN ACCORDANCE WITH THE FOLLOWING, UNLESS SPECIFICALLY AMENDED OR SUPPLEMENTED BY CONTRACT DOCUMENTS:  
A. N.J. DEPARTMENT OF TRANSPORTATION "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, 2007", AS CURRENTLY AMENDED;  
B. N.J. DEPARTMENT OF TRANSPORTATION "STANDARD ROADWAY CONSTRUCTION - TRAFFIC CONTROL - BRIDGE CONSTRUCTION DETAILS, 2007", AS CURRENTLY AMENDED;  
C. "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES", AS CURRENTLY AMENDED;  
D. CURRENT PREVAILING MUNICIPAL, COUNTY AND/OR STATE AGENCY SPECIFICATIONS, STANDARDS, CONDITIONS AND REQUIREMENTS;  
E. CURRENT PREVAILING UTILITY COMPANY/AUTHORITY SPECIFICATIONS, STANDARDS, AND REQUIREMENTS;  
F. CURRENT MANUFACTURER'S SPECIFICATIONS, STANDARDS AND REQUIREMENTS;
- THE CONTRACTOR IS RESPONSIBLE FOR PROJECT SAFETY INCLUDING PROVISION OF ALL SAFETY DEVICES AND TRAINING REQUIRED.
- THE CONTRACTOR IS RESPONSIBLE FOR THOROUGHLY EXAMINING THE PROJECT PLANS, SPECIFICATIONS, DETAILS, AND SITE. THE CONTRACTOR SHALL NOTIFY THE UNDERSIGNED PROFESSIONAL IMMEDIATELY IF ANY SITE CONDITIONS DIFFER MATERIALLY FROM THOSE REPRESENTED HEREIN.
- THE CONTRACTOR SHALL OBTAIN PERMITS REQUIRED FOR THE PROPOSED IMPROVEMENTS.
- ALL MATERIALS MUST BE AMERICAN MADE. THE CONTRACTOR MUST PROVIDE THE ENGINEER WITH SHIPPING AND DELIVERY TICKETS/RECEIPTS FOR ALL MATERIALS TO USED FOR CONSTRUCTION OF THE PROPOSED IMPROVEMENTS.
- THE CONTRACTOR SHALL OBTAIN SHOP DRAWING APPROVAL PRIOR TO THE INSTALLATION OF EACH ITEM. THE CONTRACTOR SHALL SUBMIT SHOP DRAWINGS FOR REVIEW AND APPROVAL AT LEAST TWO (2) WEEKS PRIOR TO ORDERING MATERIALS.
- THE CONTRACTOR IS RESPONSIBLE FOR ALL STAKEOUT AND LAYOUT, AS NECESSARY, TO CONSTRUCT THE PROPOSED IMPROVEMENTS IN STRICT CONFORMANCE WITH THE PROJECT PLANS, SPECIFICATIONS AND DETAILS. THESE DESIGN DRAWINGS HAVE NOT BEEN DRAFTED OVER A SURVEY BASE MAP.
- THE CONTRACTOR MUST REVIEW AND AGREE TO AS-BUILT QUANTITIES WITH THE ENGINEER ON A WEEKLY BASIS.
- THE ENGINEER MUST BE CONTACTED IMMEDIATELY UPON THE INSPECTOR OR CONTRACTOR RECEIVING A COMPLAINT FROM ANY PERSON WITHIN THE PROJECT AREA OR MUNICIPAL OFFICIAL.

UTILITY NOTES:

- CONTRACTOR IS RESPONSIBLE FOR CONTACTING ONE-CALL SERVICES AS REQUIRED BY STATE AND/OR LOCAL ORDINANCES PRIOR TO ANY EXCAVATION ACTIVITIES.
- NOT ALL UTILITY POLES, UTILITY VALVES AND UTILITY LINES ARE SHOWN ON THE PLAN. THE CONTRACTOR SHALL FIELD VERIFY ALL UTILITIES PRIOR TO THE START OF CONSTRUCTION.
- THE CONTRACTOR SHALL CALL FOR A UTILITY MARK-OUT PRIOR TO THE START OF CONSTRUCTION (CALL 1-800-272-1000).
- UTILITY RELOCATIONS SHOWN ON THE PLAN, IF ANY, ARE FOR INFORMATIONAL PURPOSES ONLY AND MAY NOT REPRESENT ALL REQUIRED WORK. THE CONTRACTOR IS RESPONSIBLE FOR COORDINATING WITH ALL UTILITY COMPANIES/AUTHORITIES IMPACTED BY THE PROPOSED WORK AND PERFORMING UTILITY RELOCATIONS IN ACCORDANCE WITH THE REQUIREMENTS OF THE PERTINENT UTILITY COMPANIES/AUTHORITIES. NO SEPARATE PAYMENT SHALL BE MADE FOR COORDINATING AND PERFORMING UTILITY RELOCATIONS.
- ALL UTILITY MANHOLES, VALVE BOXES, CLEANOUTS, METERS, ETC. SHALL BE RESET BY THE CONTRACTOR TO MEET PROPOSED ROAD, SIDEWALK AND DRIVEWAY GRADES. THE CONTRACTOR SHALL COORDINATE WITH IMPACTED UTILITY COMPANIES/AUTHORITIES AS NECESSARY..
- THE CONTRACTOR SHALL TAKE PRECAUTION WHEN WORKING ADJACENT TO UTILITIES AND TEMPORARILY SUPPORT UTILITY POLES, IF REQUIRED, DURING THE PROGRESS OF WORK.
- THE CONTRACTOR SHALL CLEAN AND MAINTAIN ALL STORM SEWER STRUCTURES, AS NECESSARY, FOR THE DURATION OF THE PROJECT.

MAINTENANCE AND PROTECTION OF TRAFFIC NOTES:

- THE CONTRACTOR SHALL COORDINATE ALL TRAFFIC CONTROL MEASURES WITH THE LOCAL POLICE DEPARTMENT AND OWNER. TRAFFIC CONTROL DETAILS PROVIDED HEREIN ARE TYPICAL AND SUBJECT TO MODIFICATION BY THE LOCAL POLICE DEPARTMENT AND OWNER.
- THE CONTRACTOR SHALL MAKE PROVISIONS FOR MATERIAL AND EQUIPMENT STORAGE. NO EQUIPMENT OR MATERIALS SHALL BE STORED WITHIN THE R.O.W. WITHOUT EXPRESS WRITTEN CONSENT FROM THE LOCAL POLICE DEPARTMENT AND OWNER.
- THE CONTRACTOR SHALL PREPARE AND SUBMIT A TRAFFIC CONTROL SCHEDULE AND STAGING PLAN TO THE LOCAL POLICE DEPARTMENT AND OWNER FOR REVIEW AND APPROVAL. THE PLAN MUST BE APPROVED BY THE LOCAL POLICE DEPARTMENT AND OWNER PRIOR TO THE START OF CONSTRUCTION.
- THE CONTRACTOR SHALL NOTIFY THE OWNER AND LOCAL POLICE DEPARTMENT SEVENTY-TWO (72) HOURS PRIOR TO THE START OF ANY WORK.
- THE CONTRACTOR SHALL COORDINATE WITH THE LOCAL POLICE DEPARTMENT TO DETERMINE THE NEED FOR POLICE TRAFFIC DIRECTORS. THE CONTRACTOR SHALL PROVIDE THE LOCAL POLICE DEPARTMENT WITHIN AT LEAST ONE (1) WEEK NOTICE PRIOR TO REQUESTING POLICE TRAFFIC DIRECTORS.
- THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING AND PLACING TEMPORARY NO PARKING SIGNS. SIGNS MUST BE OBTAINED FROM THE LOCAL POLICE DEPARTMENT, IF APPLICABLE. TEMPORARY NO PARKING SIGNS MUST BE POSTED AT LEAST FORTY-EIGHT (48) HOURS IN ADVANCE CONSTRUCTION.

SOIL EROSION AND TREE PROTECTION NOTES:

- THE CONTRACTOR SHALL INSTALL AND MAINTAIN SOIL EROSION AND SEDIMENT CONTROL MEASURES FOR THE DURATION OF THE PROJECT IN ACCORDANCE WITH THE STANDARDS FOR SOIL EROSION AND SEDIMENT CONTROL MEASURES IN NEW JERSEY.
- INLET FILTERS ARE TO BE INSTALLED ON ALL EXISTING AND NEW INLETS WITHIN THE PROJECT LIMITS AND IMMEDIATELY ADJACENT TO PROJECT LIMITS.
- SILT FENCE SHALL BE INSTALLED AS DIRECTED IN THE FIELD BY THE ENGINEER, AS NECESSARY.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR IMPLEMENTING DUST CONTROL MEASURES, AS NECESSARY. ALL VEHICLES SHALL BE CLEAN AND ALL ROADWAYS SHALL BE MAINTAINED TO AVOID DUST POLLUTION.
- THE CONTRACTOR SHALL PROTECT ALL TREES SCHEDULED TO REMAIN DURING CONSTRUCTION. DAMAGE TO EXISTING TREES WILL BE EVALUATED BY THE OWNER AND ENGINEER. DAMAGED TREES WILL BE REPLACED AS REQUIRED AT NO ADDITIONAL COST TO THE OWNER.
- WHERE EXISTING TREES AND ROOT SYSTEMS MAY CONFLICT WITH THE PROPOSED IMPROVEMENTS, THE CONTRACTOR MUST RETAIN A CERTIFIED TREE EXPERT TO EVALUATE TREES IN QUESTION. ALL EVALUATIONS SHALL BE IN WRITING AND SHALL ACCURATELY IDENTIFY THE TREE IN QUESTION BY STATION AND OFFSET (LEFT OR RIGHT). ALL EVALUATIONS SHALL BE SUBMITTED TO THE ENGINEER FOR REVIEW.

DEMOLITION AND CONSTRUCTION NOTES:

- ALL EXCAVATED MATERIALS ARE TO BE DISPOSED OF IN ACCORDANCE WITH APPROVED NJDOT AND NJDEP MEANS & METHODS. THE CONTRACTOR MUST NOT DEPOSIT EXCESS MATERIALS WITHIN THE MUNICIPAL LIMITS WITHOUT EXPRESS PERMISSION OF THE OWNER.
- ALL EXCAVATED AND DEMOLISHED MATERIALS, DEBRIS, AND EQUIPMENT, INCLUDING STONE, TOPSOIL, TREES, BLOCK AND CONCRETE FORMS, MUST BE REMOVED FROM THE PROJECT AREA AT THE CONCLUSION OF EACH DAY, UNLESS OTHERWISE APPROVED BY THE ENGINEER AND LOCAL POLICE DEPARTMENT.
- THE CONTRACTOR SHALL NOTE THAT ROADWAY BASE MATERIAL MAY CONSIST OF COBBLESTONES, CONCRETE AND/OR ASPHALT. NO ADDITIONAL PAYMENTS WILL BE MADE TO CONTRACTOR FOR DAMAGES TO EQUIPMENT OR ADDITIONAL LABOR REQUIRED TO MAKE IMPROVEMENTS AS DESCRIBED ON PLANS DUE TO VARIATIONS IN ROADWAY BASE MATERIALS.
- ALL EXISTING GRATES AND CASTINGS ARE THE PROPERTY OF THE MUNICIPALITY OR RESPECTIVE UTILITY AUTHORITY. ALL EXISTING GRATES AND CASTINGS THAT ARE TO BE REPLACED AS A PART OF THE PROPOSED IMPROVEMENTS SHALL BE RETURNED TO THE MUNICIPALITY OR RESPECTIVE UTILITY AUTHORITY.
- THE CONTRACTOR MUST PROTECT CONCRETE UNTIL CONCRETE IS CURED. DAMAGED AND VANDALIZED CONCRETE SHALL BE REPLACED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE OWNER.
- THE CONTRACTOR SHALL RESET ALL RAILINGS, GATES AND FENCES AS REQUIRED TO COMPLETE THE PROPOSED IMPROVEMENTS.
- THE CONTRACTOR IS RESPONSIBLE TO REPLACE/RESET ANY SPRINKLERS DAMAGED/DISTURBED DURING CONSTRUCTION AT NO ADDITIONAL COST TO THE OWNER.


ACCESS TO RESIDENCES AND BUSINESSES:

- THE CONTRACTOR SHALL MAINTAIN SAFE PEDESTRIAN AND VEHICULAR ACCESS TO ALL RESIDENCES AND BUSINESSES FOR THE DURATION OF THE PROJECT.
- DURING DEMOLITION AND IMMEDIATELY AFTER POURING CONCRETE, THE CONTRACTOR MUST PLACE WOOD PLANKS, AT LEAST TWO (2) FT. WIDE, AT EACH ADJACENT BUILDING ENTRANCE TO ALLOW FOR SAFE ACCESS. PEDESTRIANS CANNOT BE EXPECTED TO CROSS OVER STONE, DIRT OR OTHER DEMOLISHED MATERIAL WITHOUT PLANKS. THE CONTRACTOR WILL NOT BE PERMITTED TO LEAVE THE SITE WITHOUT PLACING WOODEN ACCESS PLANKS TO PROVIDE SAFE ACCESS TO RESIDENCES AND BUSINESSES.
- THE CONTRACTOR SHALL MAINTAIN VEHICULAR ACCESS TO ALL DRIVEWAYS DURING CONSTRUCTION. THE CONTRACTOR SHALL TEMPORARILY INSTALL AND MAINTAIN DENSE GRADED AGGREGATE OR HOT MIX ASPHALT TO PROVIDE A RIDING SURFACE FOR VEHICLE ACCESS TO EACH PROPERTY DURING CONSTRUCTION.
- THE CONTRACTOR MUST ASSURE ACCESS FOR EMERGENCY VEHICLES AND GARBAGE COLLECTION VENDORS FOR THE DURATION OF THE PROJECT.
- THE CONTRACTOR SHALL PROVIDE TEMPORARY ACCESSIBLE CURB RAMPS WITH HAND RAILS WHEN EXISTING ACCESSIBLE ACCESS IS REMOVED OR LIMITED DUE TO CONSTRUCTION.
- NO SEPARATE PAYMENT SHALL BE MADE FOR THE PROVISION OF SAFE PEDESTRIAN AND VEHICULAR ACCESS AS DESCRIBED ABOVE AND AS DIRECTED IN THE FIELD BY THE ENGINEER.

MILLING AND PAVING NOTES:

- THE CONTRACTOR MUST PROVIDE A SMOOTH SAWCUT EDGE WHERE PROPOSED PAVEMENT ABUTS EXISTING PAVEMENT.
- THE CONTRACTOR SHALL MARK ALL RAISED UTILITY MANHOLES, INLETS AND VALVE BOXES THAT ARE EXPOSED AS A RESULT OF MILLING. IN ADDITION, THE CONTRACTOR SHALL INSTALL TEMPORARY PAVEMENT RAMPS AROUND RAISED UTILITIES AS DIRECTED BY THE ENGINEER WHERE SUCH UTILITIES MAY BE IN CONFLICT WITH VEHICULAR AND PEDESTRIAN TRAFFIC.
- PRIOR TO FINAL ACCEPTANCE, ALL PROPERTY CORNERS OR MONUMENTS REMOVED OR DAMAGED DURING CONSTRUCTION SHALL BE REPLACED BY A NEW JERSEY LICENSED LAND SURVEYOR AT NO ADDITIONAL COST TO THE OWNER.
- THE CONTRACTOR MUST REPLACE ANY DAMAGED CONCRETE CURB AND SIDEWALK BEFORE ACCEPTANCE OF THE PROJECT BY THE OWNER.
- ALL AREAS OUTSIDE OF THE PROJECT LIMITS THAT ARE DISTURBED AS RESULT OF CONSTRUCTION ACTIVITIES SHALL BE RESTORED AT NO ADDITIONAL COST TO THE OWNER PRIOR TO PROJECT ACCEPTANCE.
- ALL GRASSED AREAS DISTURBED BY CONSTRUCTION ACTIVITIES SHALL BE RESTORED BY TOPSOILING, SEEDING, FERTILIZING AND MULCHING.

PAY ITEM NO.	BASE BID - VARIOUS ROADWAY & DRAINAGE IMPROVEMENTS	UNIT	TOTAL BASE BID QUANTITY	IF/WHERE DIRECTED QUANTITY	PLAN SHEET QUANTITY	BROOKSIDE PLACE PLAN QUANTITY SHEET 6	BROOKSIDE PLACE PLAN QUANTITY SHEET 7	BROOKSIDE PLACE PLAN QUANTITY SHEET 8	BROOKSIDE PLACE PLAN QUANTITY SHEET 9
1	CAUTION FENCE	LF	360	0	360	120	200	40	0
2	INLET FILTER TYPE 2	SF	150	0	150	0	40	40	70
3	BREAKAWAY BARRICADE	LN	25	0	25	0	0	0	0
4	DRUM	LN	50	0	50	0	0	0	0
5	TRAFFIC CONE	LN	50	0	50	0	0	0	0
6	CONSTRUCTION SIGNS	SF	250	0	250	0	0	0	0
7	POLICE TRAFFIC DIRECTORS	MAN HOUR	200	0	200	0	0	0	0
8	FUEL PRICE ADJUSTMENT	DOLLAR	2,400	2,400	0	0	0	0	0
9	ASPHALT PRICE ADJUSTMENT	DOLLAR	2,500	2,500	0	0	0	0	0
10	CLEARING SITE	LS	1	1	0	0	0	0	0
11	FILL ABANDONED WATER MAIN WITH CONTROLLED LOW STRENGTH MATERIAL	LS	1	1	0	0	0	0	0
12	EXCAVATION, TEST PIT	CY	108	50	58	12	26	10	8
13	EXCAVATION, UNCLASSIFIED	CY	779	0	779	212	249	143	175
14	REMOVAL OF PAVEMENT	SY	2,332	0	2,332	634	745	429	524
15	DENSE GRADED AGGREGATE BASE COURSE, 6" THICK	SY	1,903	0	1,903	634	745	0	524
16	HMA MILLING, 3" OR LESS	SY	8,517	0	8,517	1,174	1,355	2,497	3,491
17	HOT MIX ASPHALT 9.5MM4 SURFACE COURSE	TON	1,297	0	1,297	231	269	336	461
18	HOT MIX ASPHALT 19MM4 BASE COURSE	TON	702	0	702	191	224	129	158
19	15" REINFORCED CONCRETE PIPE, CLASS V	LF	180	0	180	0	72	72	36
20	18" REINFORCED CONCRETE PIPE, CLASS V	LF	867	0	867	0	505	362	0
21	24" POLYPROPYLENE PIPE	LF	849	0	849	0	0	175	674
22	INLET, TYPE B	LN	9	0	9	0	4	4	1
23	MANHOLE, 5' DIAMETER	LN	1	0	1	0	0	1	0
24	3' X 3' MANHOLE BOX	LN	2	0	2	0	0	2	0
25	RESET EXISTING CASTING	LN	1	1	0	0	0	0	0
26	BICYCLE SAFE GRATE (PHASE I STORMWATER COMPLIANT GRATE)	LN	5	0	5	0	0	0	5
27	CURB PIECE (NJDEP TYPE 'N' ECO)	LN	5	0	5	0	0	0	5
28	REPAIR INTERIOR OF DRAINAGE STRUCTURE	LN	4	0	4	0	0	0	4
29	MANHOLE, DOGHOUSE, 5' DIAMETER	LN	1	0	1	0	0	0	1
30	INLET, SP-1	LN	1	0	1	0	0	0	1
31	CONCRETE SIDEWALK, 4" THICK	SY	208	0	208	125	32	51	0
32	HOT MIX ASPHALT DRIVEWAY 2" THICK	SY	315	0	315	169	130	8	8
33	CONCRETE DRIVEWAY, REINFORCED, 6" THICK	SY	257	0	257	174	40	20	23
34	DETECTABLE WARNING SURFACE	SY	12	0	12	2	4	6	0
35	RESET PAVER DRIVEWAY	SY	69	0	69	0	69	0	0
36	9' X 18" CONCRETE VERTICAL CURB	LF	470	0	470	15	30	277	148
37	GRANITE CURB	LF	2,270	1	2,269	996	1,088	185	0
38	NON-VEGETATIVE SURFACE, POROUS HOT MIX ASPHALT, 6" THICK	SY	90	0	90	0	0	0	90
39	BEAM GUIDE RAIL	LF	175	0	175	0	0	0	175
40	TANGENT GUIDE RAIL TERMINAL	LN	1	0	1	0	0	0	1
41	BEAM GUIDE RAIL ANCHORAGE	LN	0	0	1	0	0	0	1
42	TRAFFIC STRIPES, 4"	LF	3,951	0	3,951	828	852	836	1,235
43	TRAFFIC MARKING LINES, 6"	LF	682	0	682	60	122	252	245
44	TRAFFIC MARKING LINES, 12"	LF	708	0	708	53	109	300	246
45	REGULATORY AND WARNING SIGNS	SF	3	0	3	0	0	0	3
46	8" DUCTILE IRON SEWER PIPE, CLASS 52	LF	35	0	35	0	0	35	0
47	RECONSTRUCTED MANHOLE, SANITARY SEWER, USING NEW CASTING	LN	1	1	0	0	0	0	0
48	RESET MANHOLE, SANITARY SEWER, USING EXISTING CASTING	LN	5	5	2	0	3	0	0
49	TREE REMOVAL, OVER 24" TO 36" DIAMETER	LN	2	0	2	0	1	1	0
50	TOPSOIL SPREADING, 4" THICK	SY	2,499	0	2,499	1,135	1,155	185	24
51	FERTILIZING AND SEEDING, TYPE ERMIX-106	SY	2,499	0	2,499	1,135	1,155	185	24
52	STRAW MULCHING	SY	2,499	0	2,499	1,135	1,155	185	24

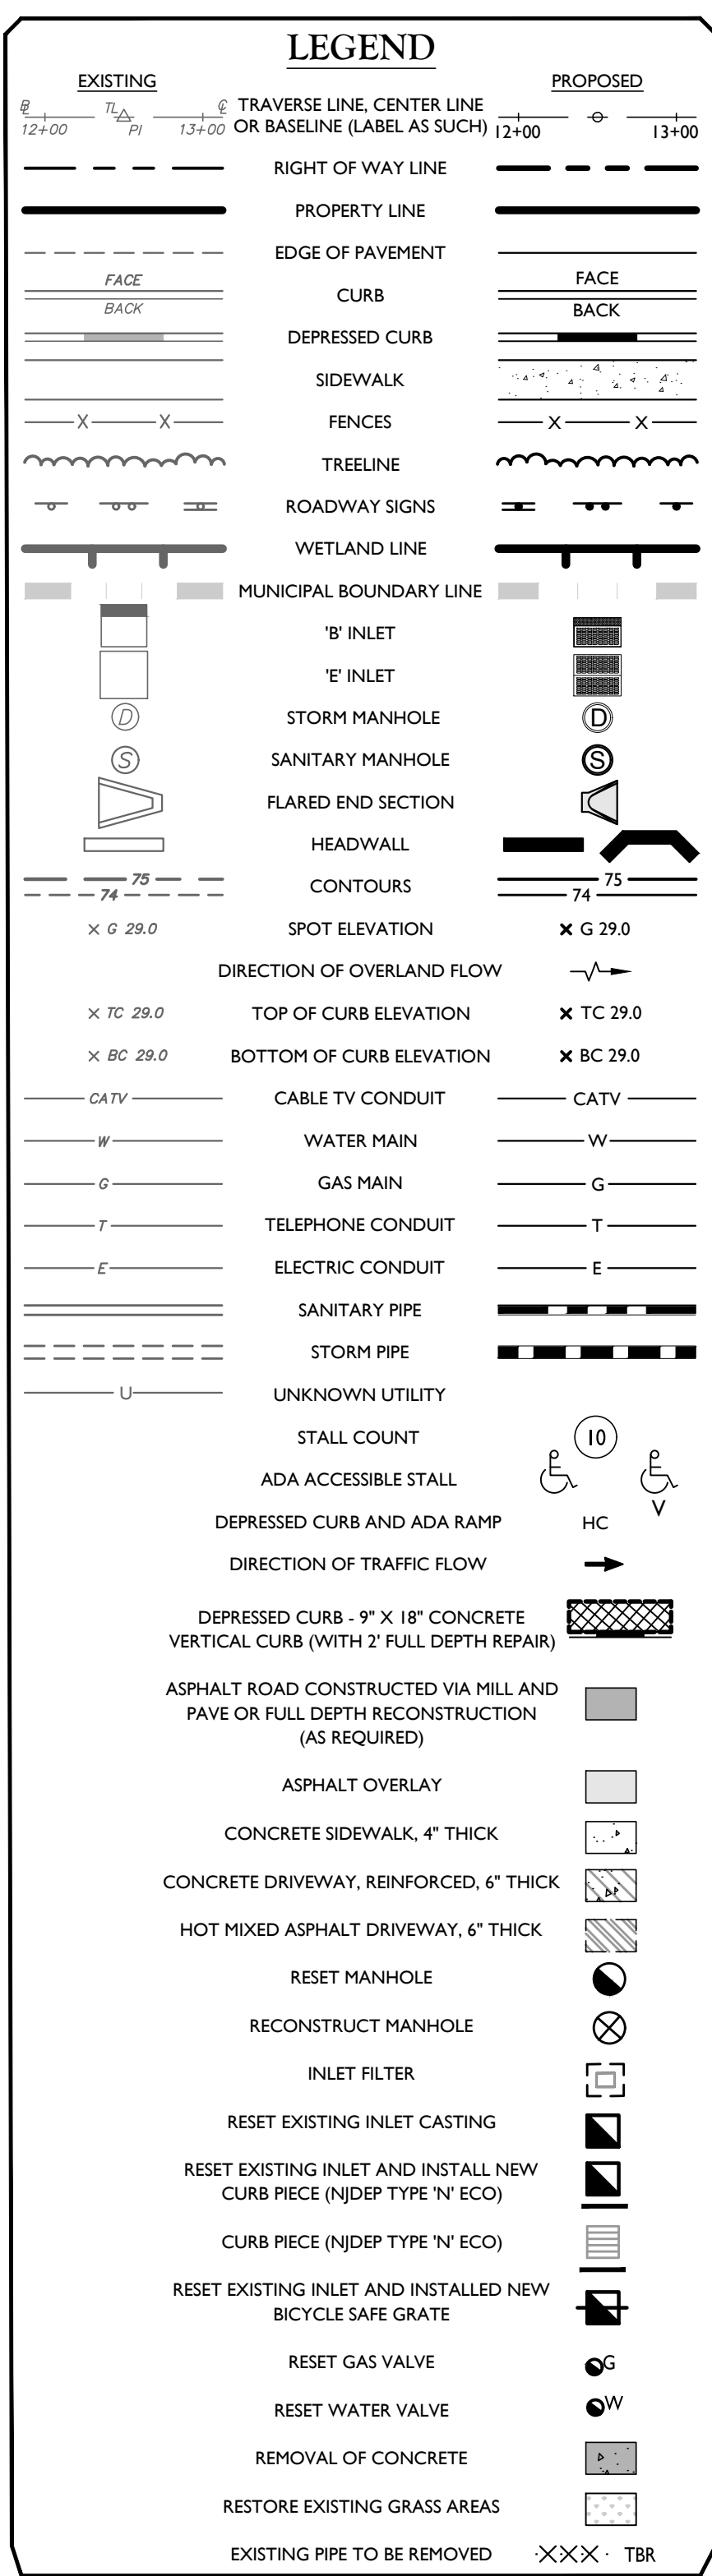

Customer Loyalty through Client Satisfaction  
www.maserconsulting.com  
Office Locations:  
NEW JERSEY  
NEW YORK  
PENNSYLVANIA  
VIRGINIA  
FLORIDA  
NORTH CAROLINA  
NEW MEXICO  
MARYLAND  
GEORGIA  
TEXAS  
TENNESSEE  
COLORADO  
State of NJ, C.O.A.: 24GA27986500  
Copyright © 2021, Maser Consulting. All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, re-used, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting, P.A.

PROTECT YOURSELF  
ALL STATES REQUIRE NOTIFICATION OF EXCAVATORS, DESIGNERS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE  
Know what's below.  
Call before you dig.  
FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM

REV	DATE	DRAWN BY	DESCRIPTION	REVISED PER NJDOT COMMENTS	REVISED PER CURB CHANGES	REVISED FOR SCD SUBMISSION	REVISED PER TOWNSHIP COMMENTS	REVISED PER NJDOT COMMENTS
1	6/8/20	BAK						
2	6/15/20	BAK						
3	6/17/20	BAK						
4	7/7/20	BAK						
5	3/5/21	BAK						
6	4/2/21	BAK						

CARL P. O'BRIEN  
NEW JERSEY PROFESSIONAL  
ENGINEER - LICENSE NUMBER: GE45154

CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS  
TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY

MT. ARLINGTON OFFICE  
400 Valley Road  
Suite 304  
Mount Arlington, NJ 07856  
Phone: 973.398.3110  
Fax: 973.398.3199


SCALE:	DATE:	DRAWN BY:	CHECKED BY:
AS SHOWN	1/30/20	BAK	PWJ

PROJECT NUMBER:	DRAWING NAME:
CDT065	C-CYBER


SHEET TITLE:
GENERAL NOTES & QUANTITIES

SHEET NUMBER:
2 of 36



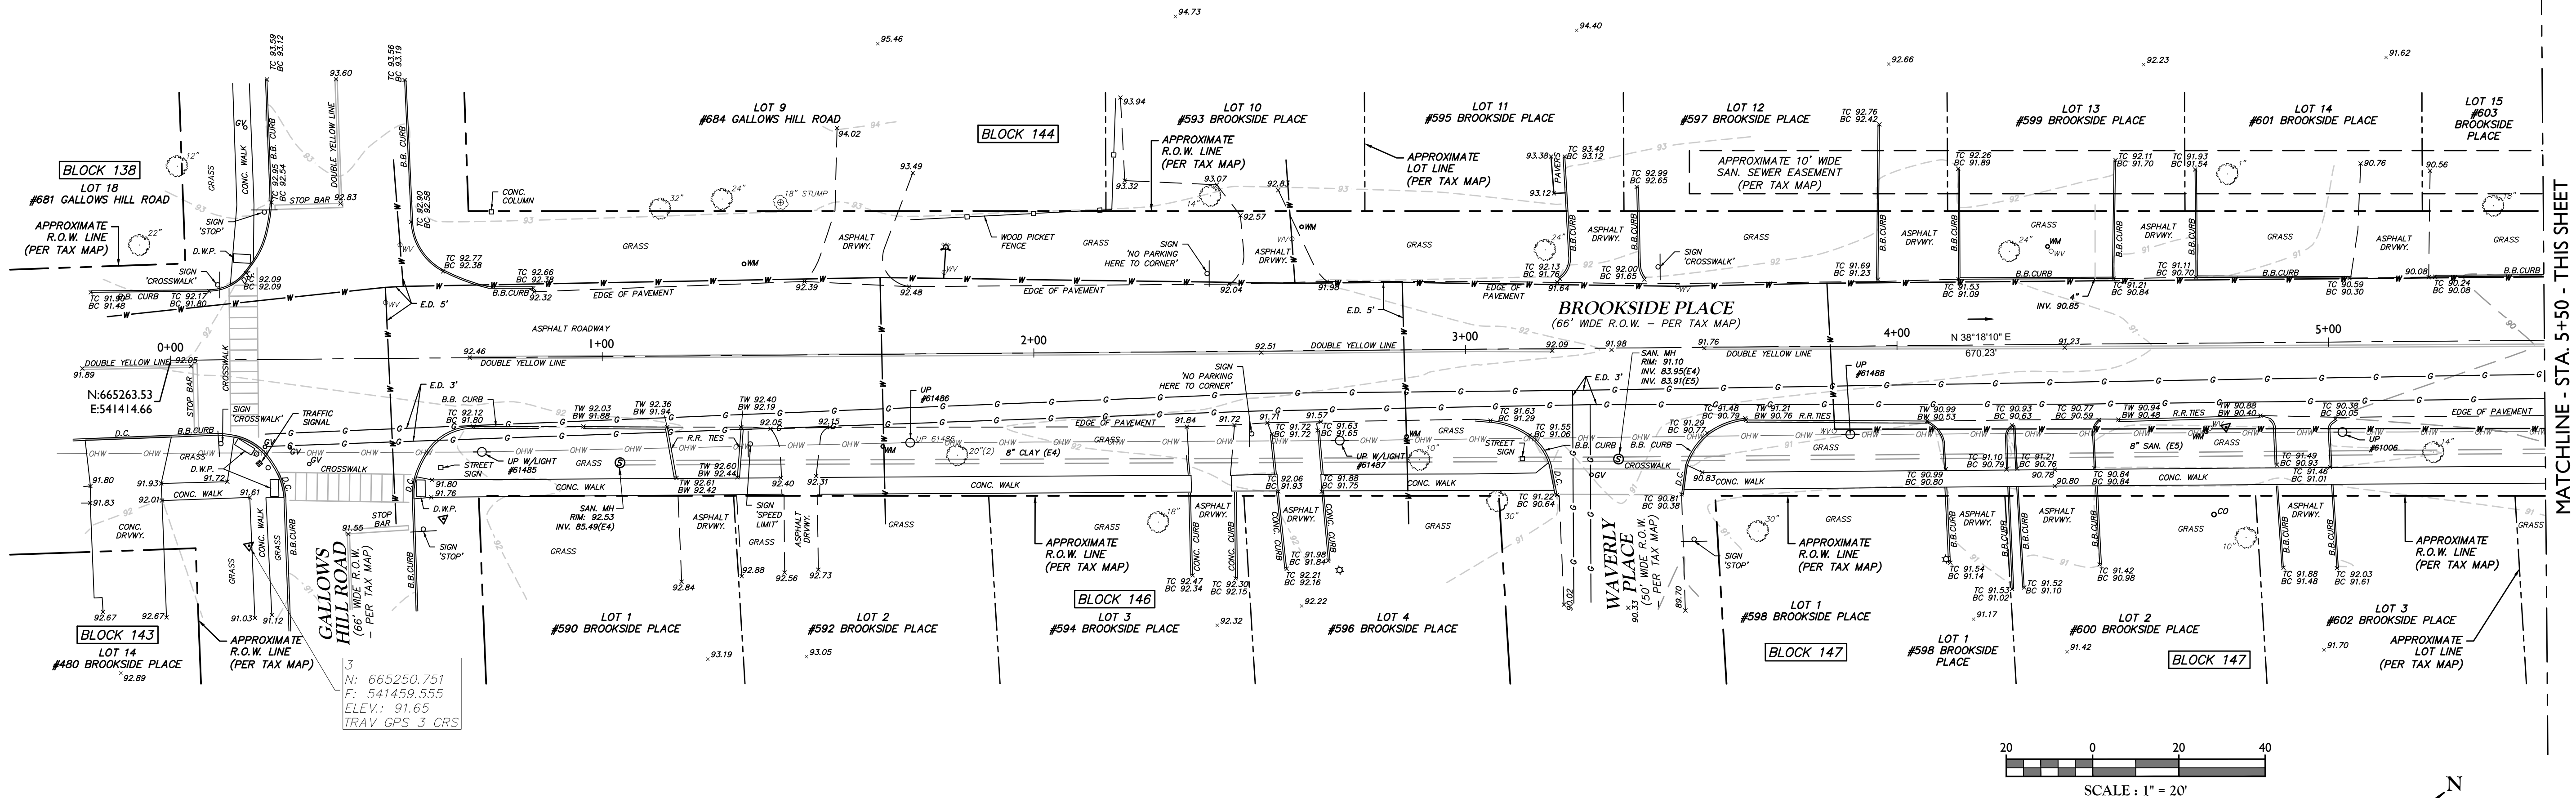

POINT PNEZD DATA				
POINT NUMBER	NORTHING	EASTING	ELEVATION	RAW DESCRIPTION
3	665250.7510	541459.5550	91.646	TRAV GPS 3 CRS

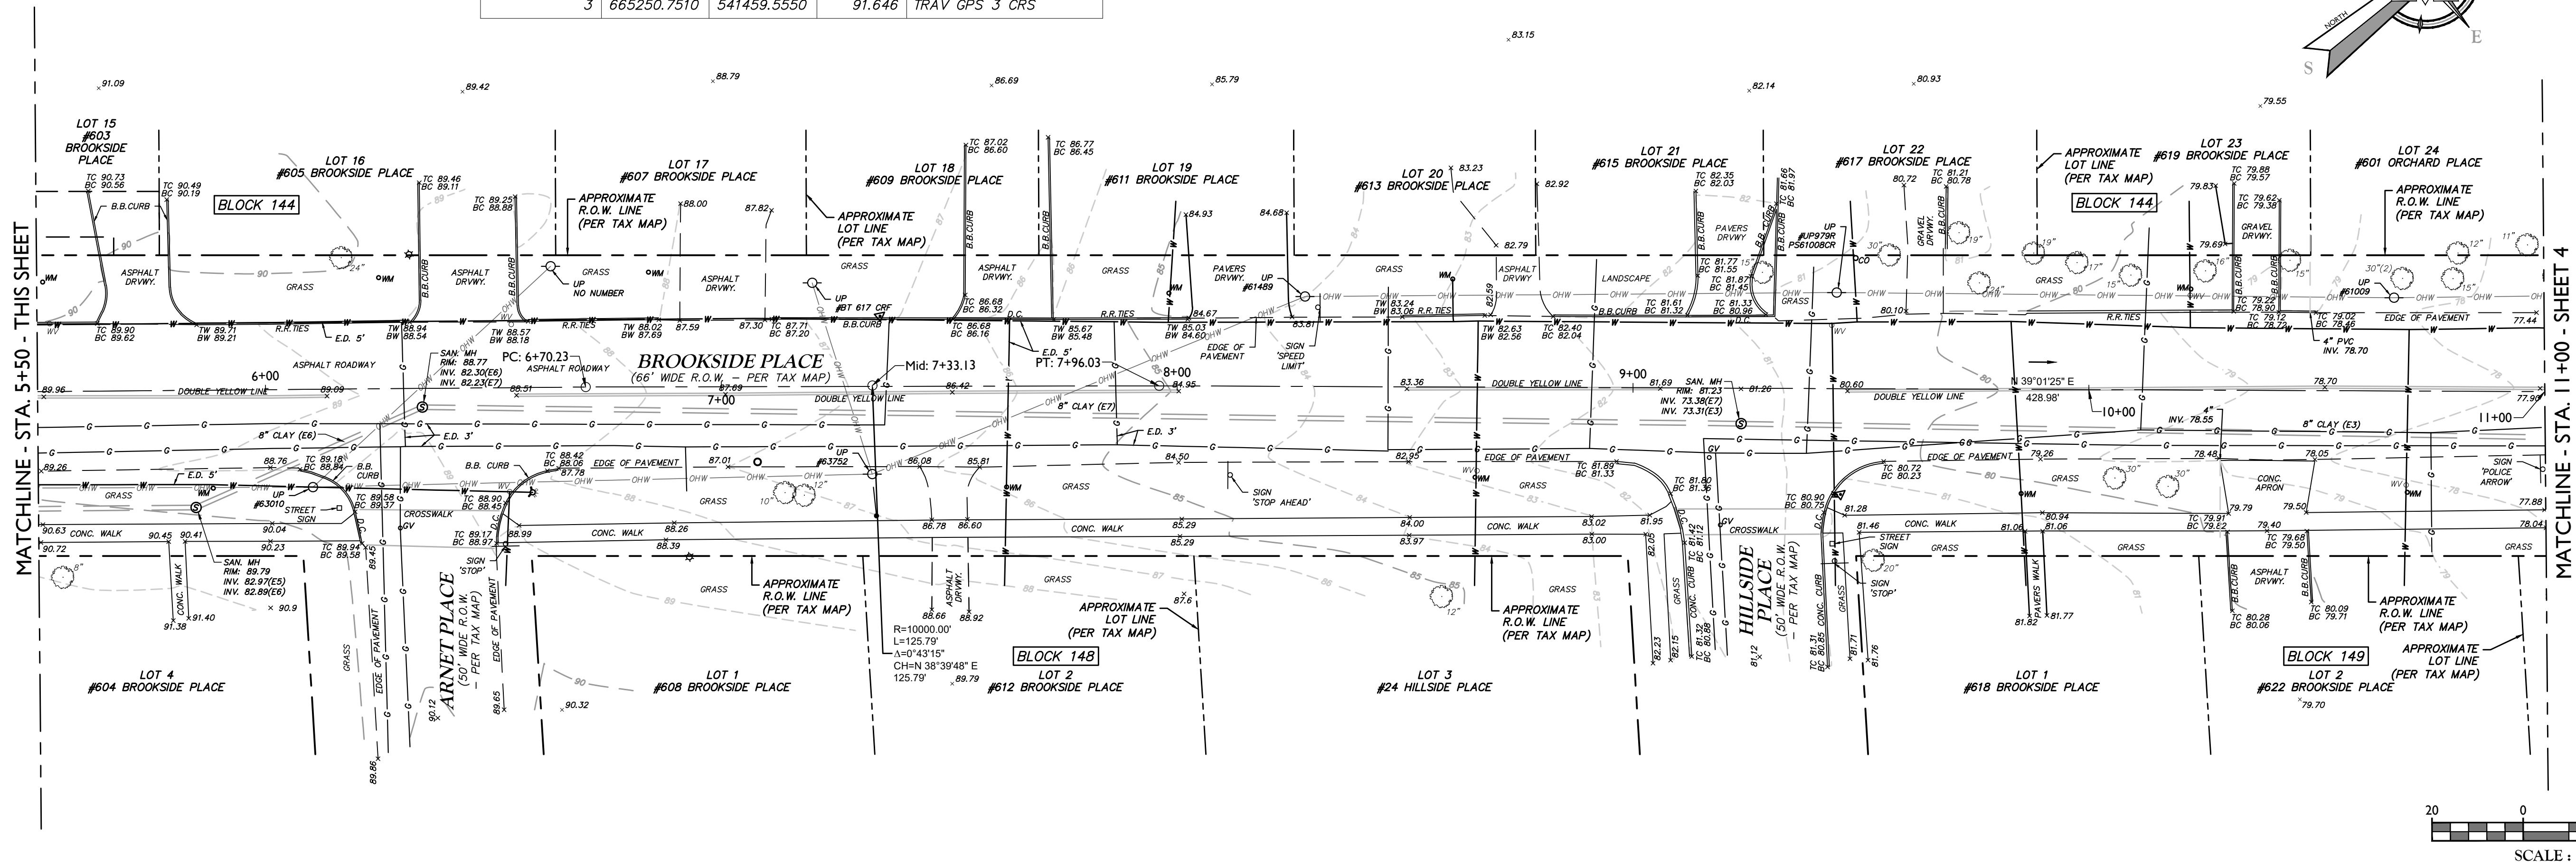

**MASER CONSULTING, P.A.**  
 Customer Loyalty through Client Satisfaction  
 www.maserconsulting.com  
 Office Locations:  
 ■ NEW JERSEY ■ NEW MEXICO  
 ■ NEW YORK ■ MARYLAND  
 ■ PENNSYLVANIA ■ GEORGIA  
 ■ VIRGINIA ■ TEXAS  
 ■ FLORIDA ■ TENNESSEE  
 ■ NORTH CAROLINA ■ COLORADO  
 State of NJ, C.O.A.: 24GA27986500  
 Copyright © 2020, Maser Consulting, All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were constructed or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting, P.A.

**811**  
 Know what's below. Call before you dig.  
 FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM

REV	DATE	DRAWN BY	DESCRIPTION
1	6/15/20	BAK	REVISED PER NJDOT COMMENTS
2	6/15/20	BAK	REVISED PER CURB CHANGES
3	6/17/20	BAK	REVISED FOR SCD SUBMISSION
4	7/7/20	BAK	REVISED PER SCD COMMENTS
5	3/5/21	BAK	REVISED PER TOWNSHIP COMMENTS
6	4/2/21	BAK	REVISED PER NJDOT COMMENTS

*Cal P. O'Brien*  
**CARL P. O'BRIEN**  
 NEW JERSEY PROFESSIONAL ENGINEER - LICENSE NUMBER: GE45154

CONSTRUCTION PLANS  
 FOR  
 NJDOT FY 2019 -  
 BROOKSIDE PLACE  
 DRAINAGE  
 IMPROVEMENTS

TOWNSHIP OF CRANFORD  
 COUNTY OF UNION  
 STATE OF NEW JERSEY

**MT. ARLINGTON OFFICE**  
 400 Valley Road  
 Suite 304  
 Mount Arlington, NJ 07856  
 Phone: 973.398.3110  
 Fax: 973.398.3199


SCALE:	DATE:	DRAWN BY:	CHECKED BY:
AS SHOWN	1/30/20	BAK	PWJ
PROJECT NUMBER:	DRAWING NAME:		
CDT065	C-DEMO		

EXISTING CONDITIONS  
 PLAN

NOTE: DO NOT SCALE DRAWINGS FOR CONSTRUCTION.



C:\DMS\Engineering\Drawings\Public\CDMO\Map\CDMO-43590.dwg 11/20/20 11:20:23

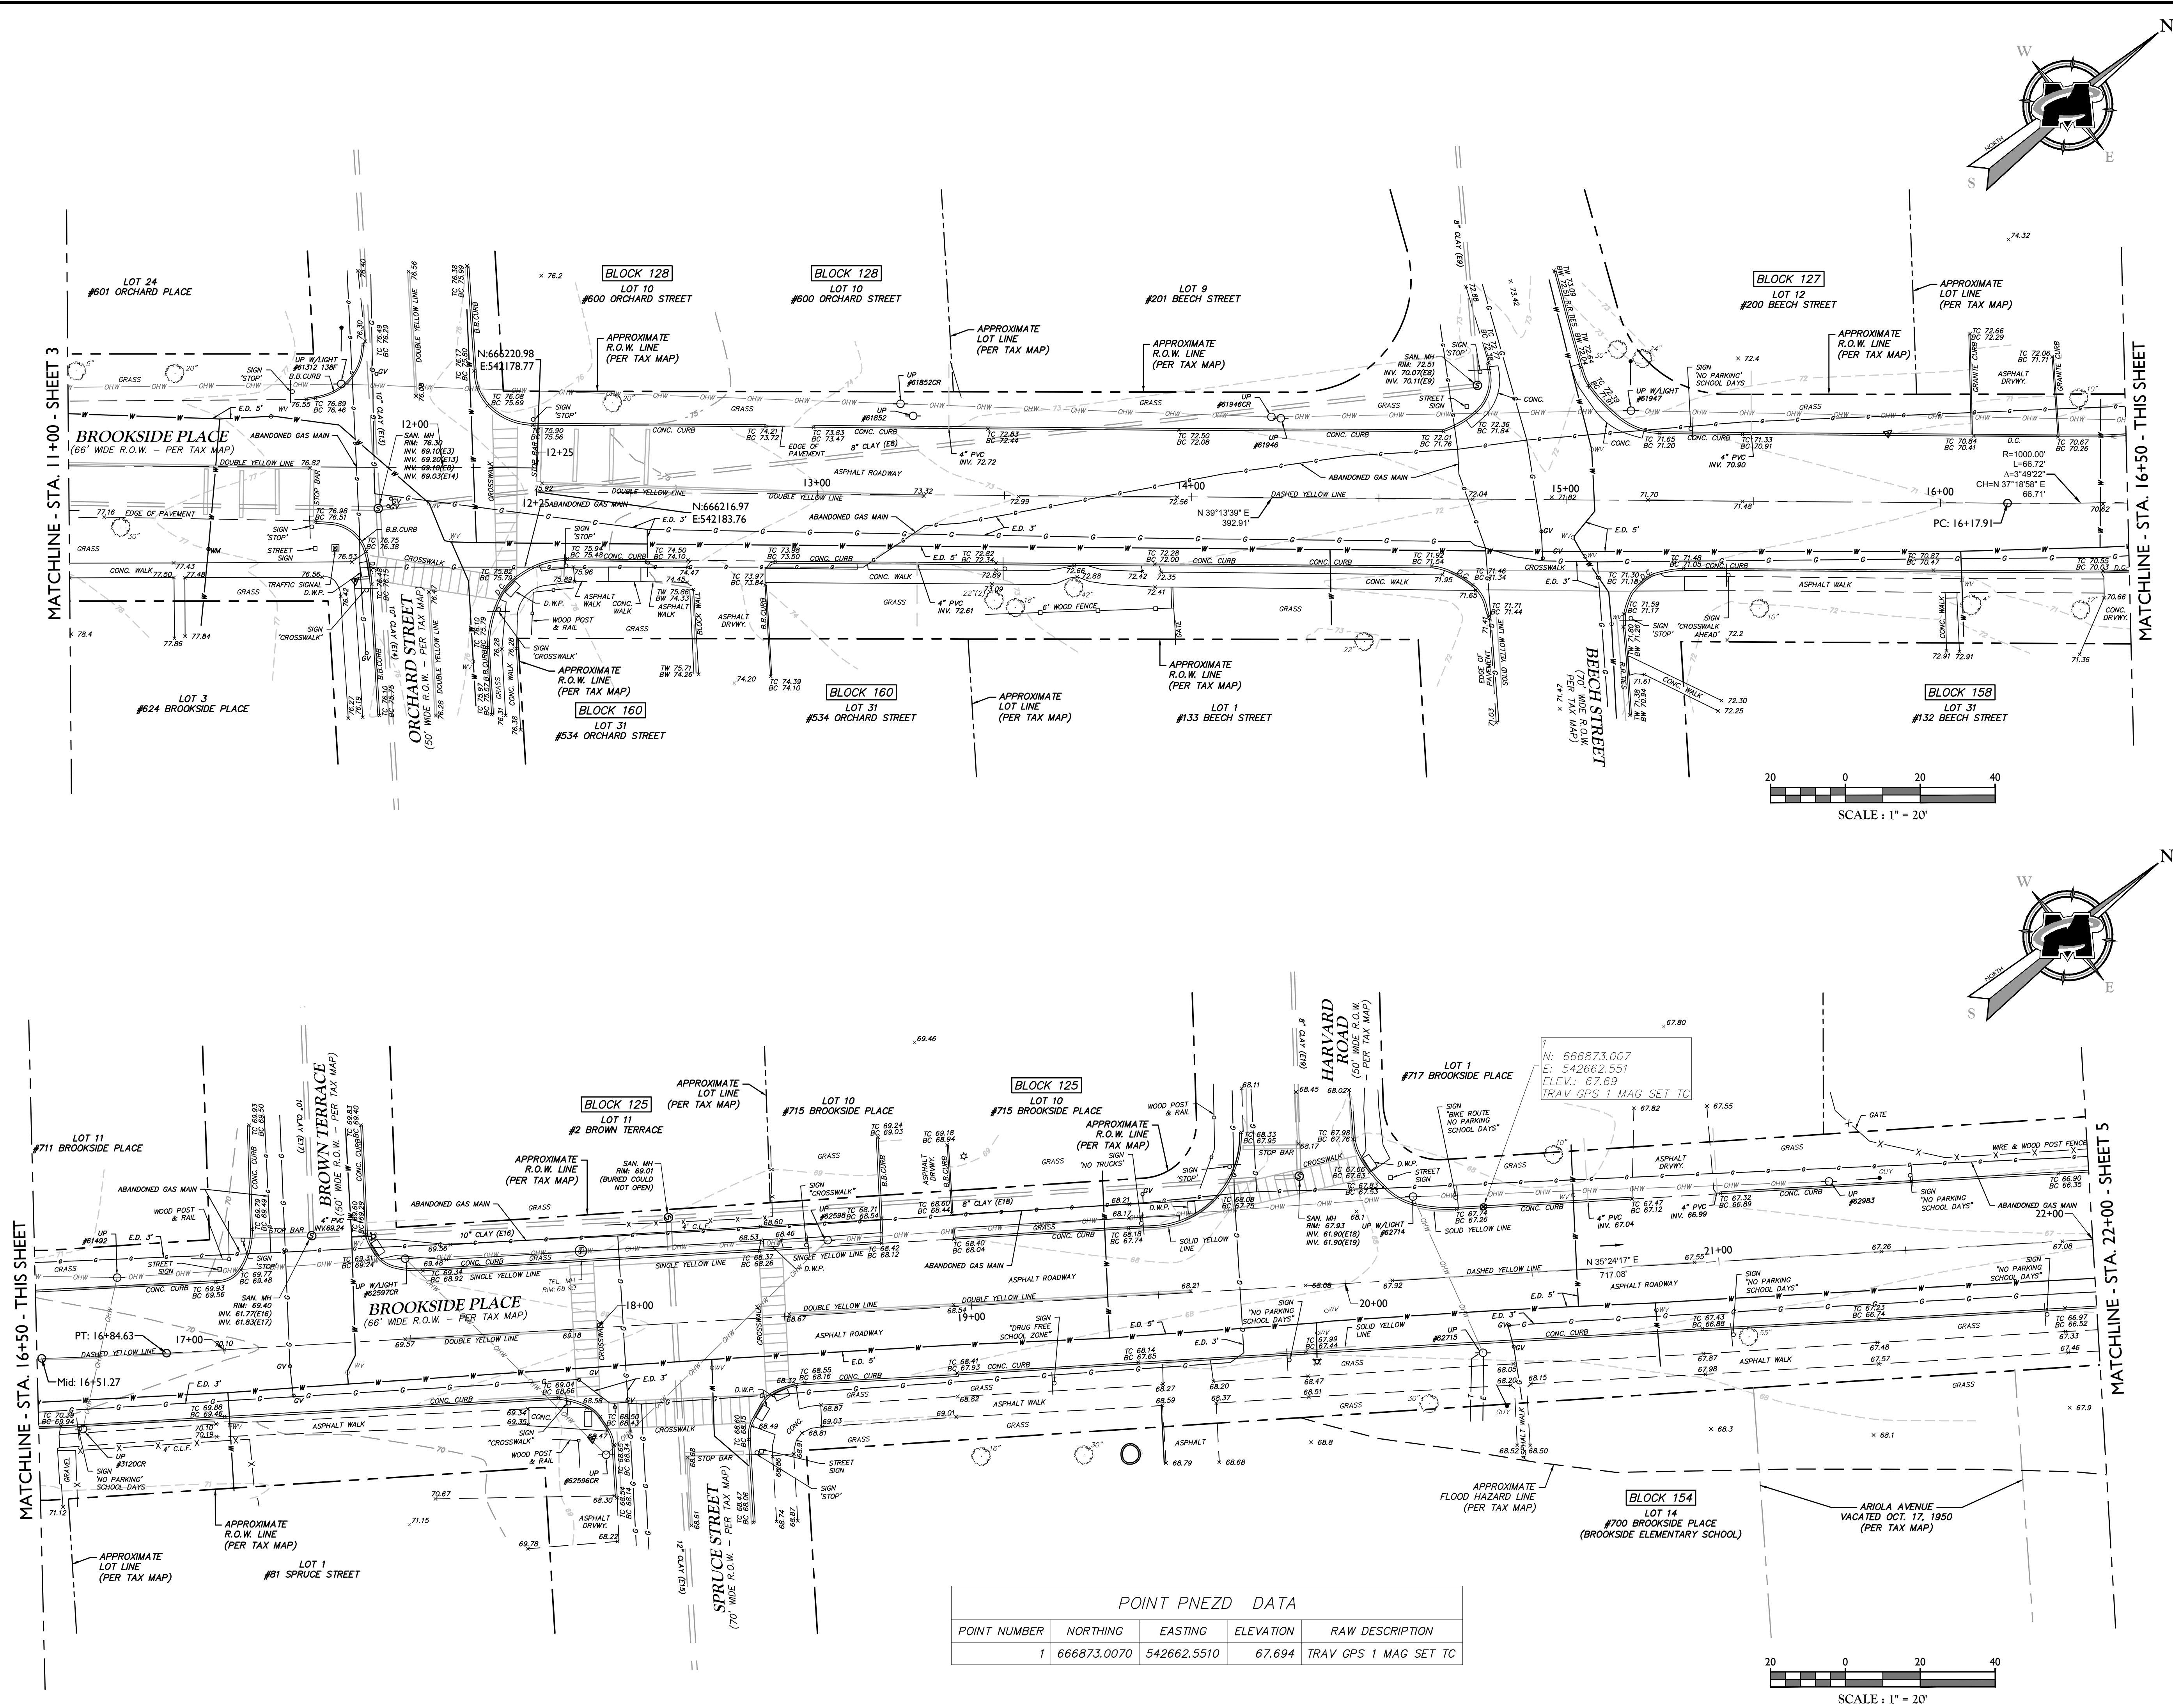

POINT PNEZD DATA				
POINT NUMBER	NORTHING	EASTING	ELEVATION	RAW DESCRIPTION
1	666873.0070	542662.5510	67.694	TRAV GPS 1 MAG SET TO



**MASER CONSULTING, P.A.**  
Customer Loyalty through Client Satisfaction  
www.maserconsulting.com  
Office Locations:  
NEW JERSEY NEW MEXICO  
NEW YORK MARYLAND  
PENNSYLVANIA GEORGIA  
VIRGINIA TEXAS  
FLORIDA TENNESSEE  
NORTH CAROLINA COLORADO

State of NJ, C.O.A.: 24GA27986500  
Copyright © 2020, Maser Consulting, All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting, P.A.

**811**  
Know what's below.  
Call before you dig.  
FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM

REV	DATE	DRAWN BY	DESCRIPTION
1	6/8/20	BAK	REVISED PER NJDOT COMMENTS
2	6/15/20	BAK	REVISED PER CURB CHANGES
3	6/17/20	BAK	REVISED FOR SCD SUBMISSION
4	7/7/20	BAK	REVISED PER SCD COMMENTS
5	3/5/21	BAK	REVISED PER TOWNSHIP COMMENTS
6	4/2/21	BAK	REVISED PER NJDOT COMMENTS

*Carl P. O'Brien*  
**CARL P. O'BRIEN**  
NEW JERSEY PROFESSIONAL  
ENGINEER - LICENSE NUMBER: GE45154

CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS

TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY



**MT. ARLINGTON OFFICE**  
400 Valley Road  
Suite 304  
Mount Arlington, NJ 07856  
Phone: 973.398.3110  
Fax: 973.398.3199

SCALE:	DATE:	DRAWN BY:	CHECKED BY:
AS SHOWN	1/30/20	BAK	PWJ
PROJECT NUMBER:	DRAWING NAME:		
CDT065	C-DEMO		

EXISTING CONDITIONS  
PLAN

NOTE: DO NOT SCALE DRAWINGS FOR CONSTRUCTION.



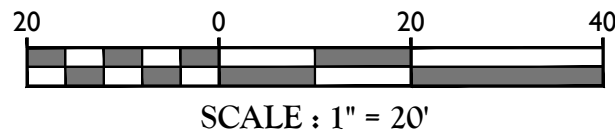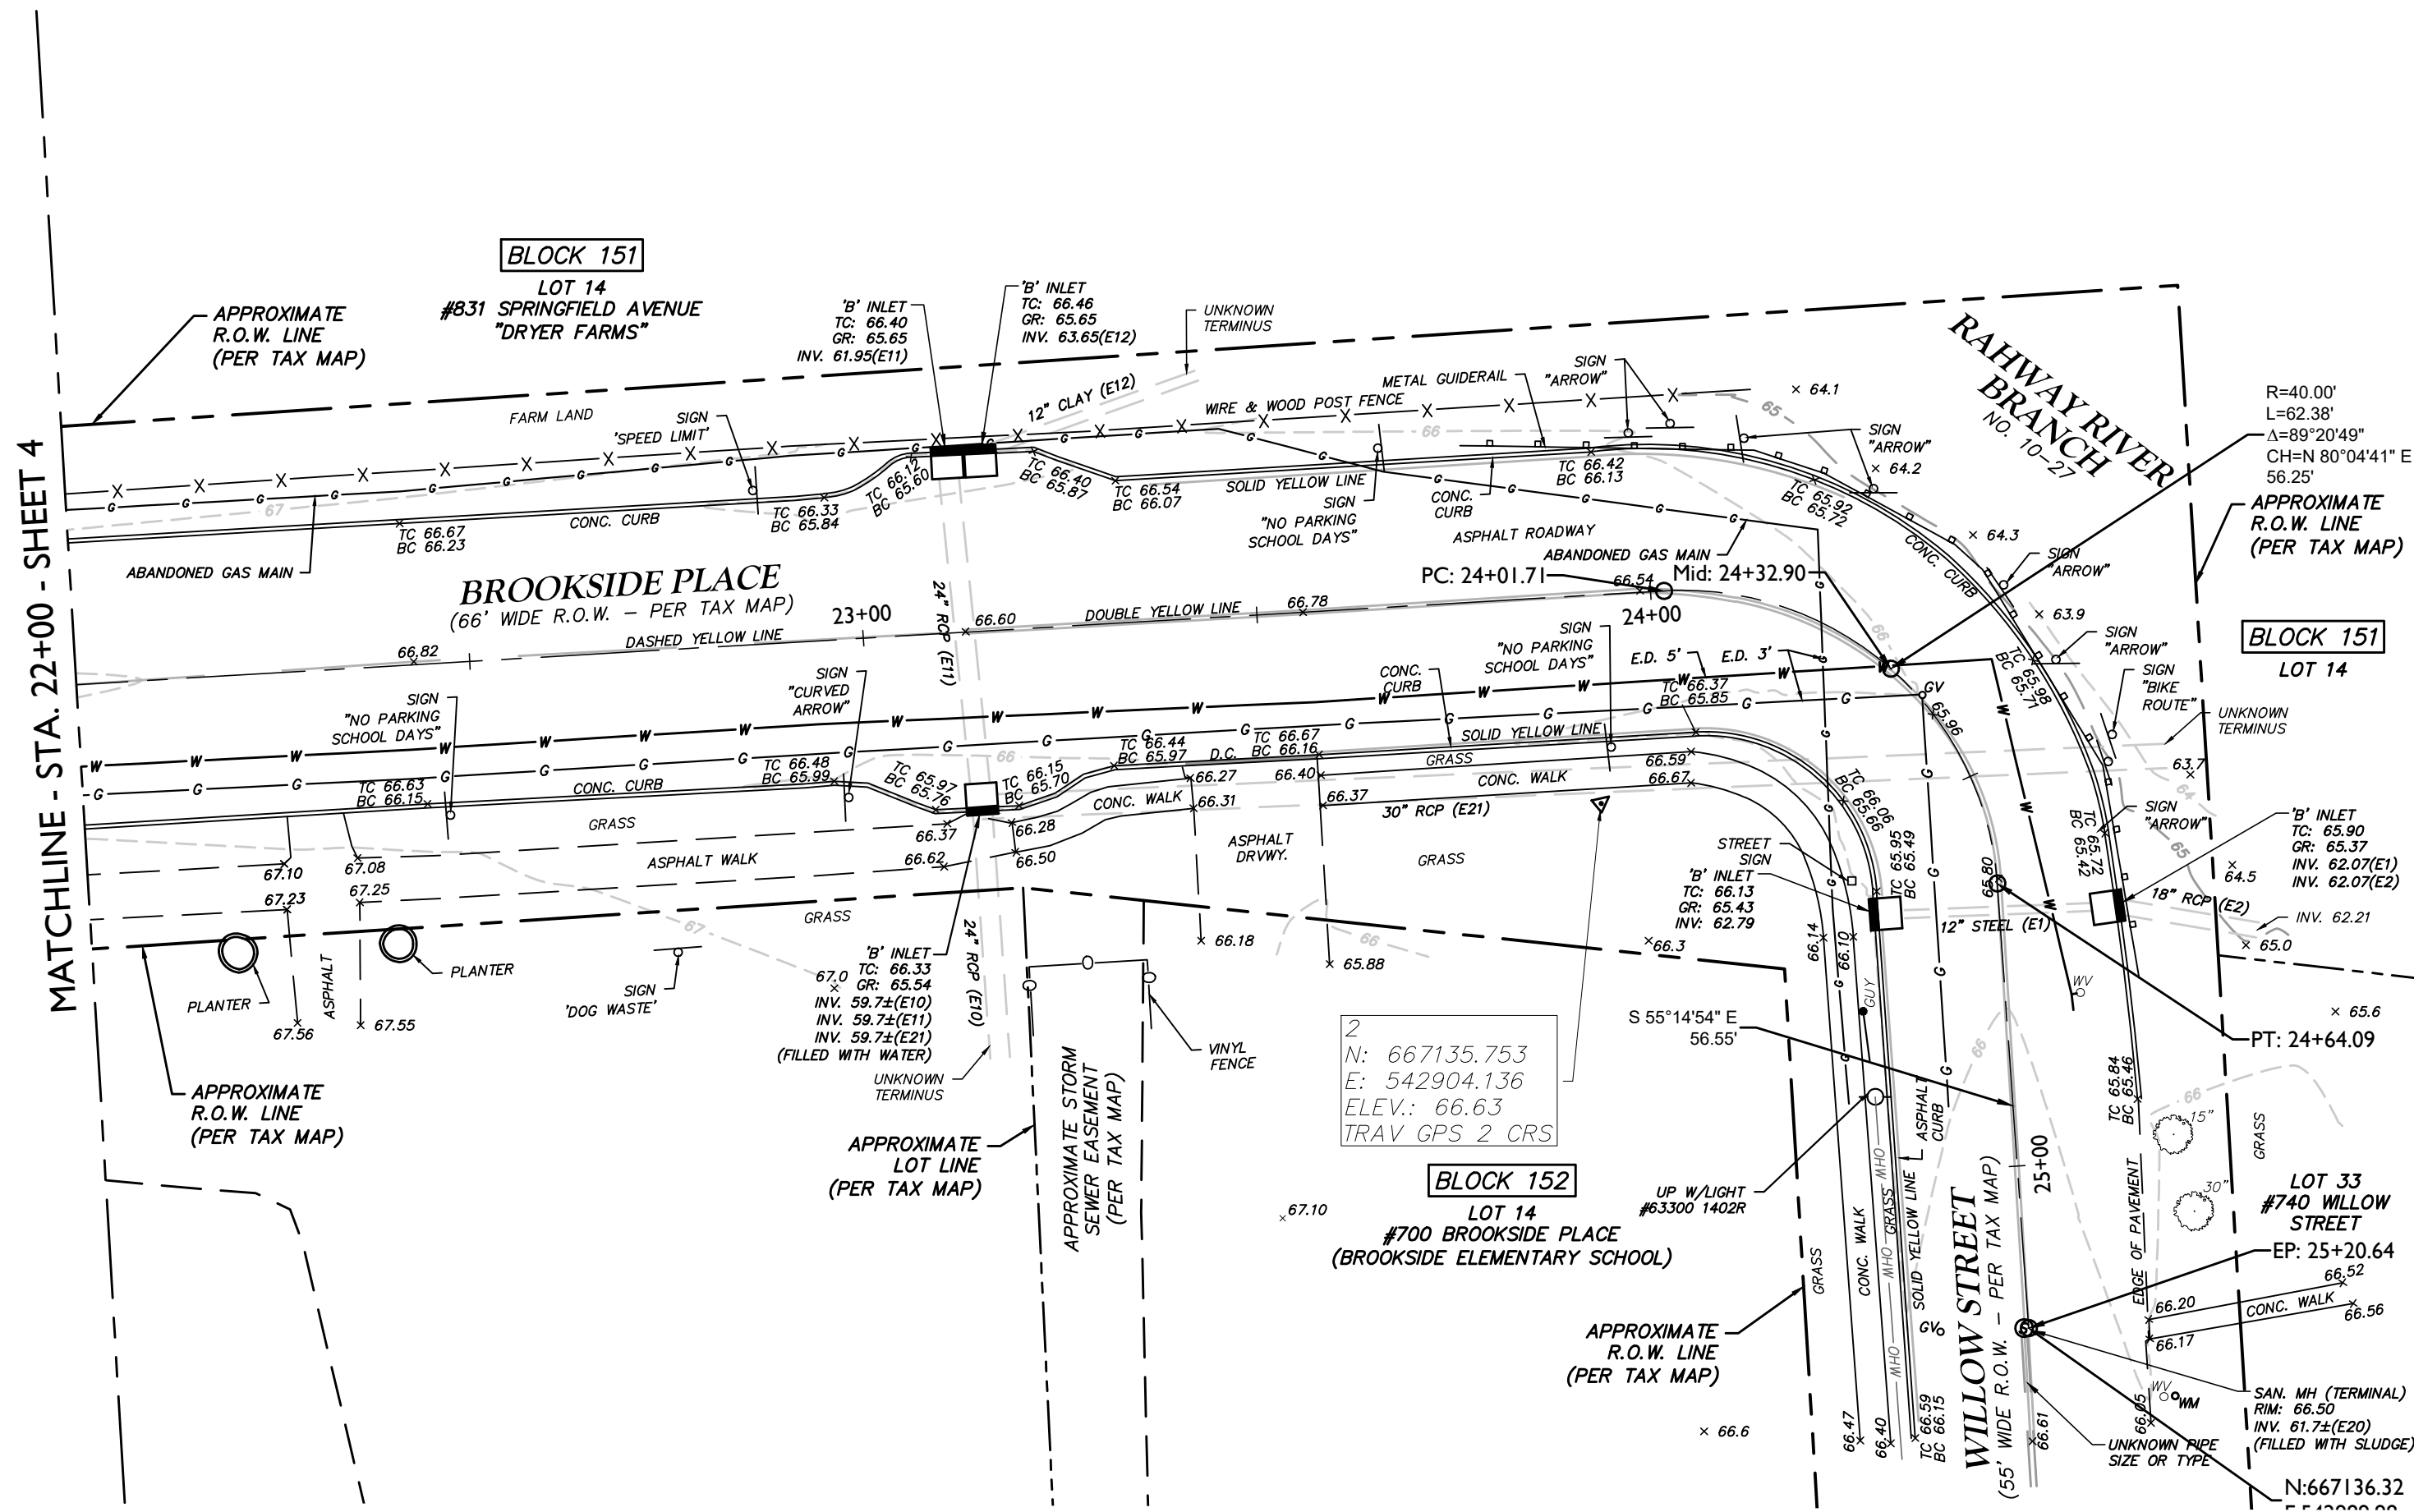

POINT PNEZD DATA				
POINT NUMBER	NORTHING	EASTING	ELEVATION	RAW DESCRIPTION
2	667135.7530	542904.1360	66.627	TRAV GPS 2 CRS



**MASER**  
CONSULTING, P.A.

Customer Loyalty through Client Satisfaction  
www.maserconsulting.com

Office Locations:

NEW JERSEY	NEW MEXICO
NEW YORK	MARYLAND
PENNSYLVANIA	GEORGIA
VIRGINIA	TEXAS
FLORIDA	TENNESSEE
NORTH CAROLINA	COLORADO

State of NJ, C.O.A.: 24GA27986500

Copyright © 2020, Maser Consulting, All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting, P.A.




**811**

PROTECT YOURSELF  
ALL STATES REQUIRE NOTIFICATION OF EXCAVATORS, DESIGNERS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE

Know what's below.  
Call before you dig.

FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM

REV	DATE	DRAWN BY	DESCRIPTION
1	6/8/20	BAK	REVISED PER NJDOT COMMENTS
2	6/15/20	BAK	REVISED PER CURB CHANGES
3	6/17/20	BAK	REVISED FOR SCD SUBMISSION
4	7/7/20	BAK	REVISED PER SCD COMMENTS
5	3/5/21	BAK	REVISED PER TOWNSHIP COMMENTS
6	4/2/21	BAK	REVISED PER NJDOT COMMENTS




**CARL P. O'BRIEN**  
NEW JERSEY PROFESSIONAL  
ENGINEER - LICENSE NUMBER: GE45154

CONSTRUCTION PLANS

FOR

NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS

TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY



**MT. ARLINGTON OFFICE**  
400 Valley Road  
Suite 304  
Mount Arlington, NJ 07856  
Phone: 973.398.3110  
Fax: 973.398.3199

SCALE:	DATE:	DRAWN BY:	CHECKED BY:
AS SHOWN	1/30/20	BAK	PWJ
PROJECT NUMBER:	DRAWING NAME:		
CDT065	C-DEMO		

SHEET TITLE:

EXISTING CONDITIONS  
PLAN

SHEET NUMBER:

5 of 36





**811**  
  
**PROTECT YOURSELF**  
 ALL STATES REQUIRE NOTIFICATION OF  
 EXCAVATORS, DESIGNERS, OR ANY PERSON  
 PREPARING TO DISTURB THE EARTH'S  
 SURFACE ANYWHERE IN ANY STATE

REV	DATE	DRAWN BY	DESCRIPTION
1	6/03/20	BAK	REVISED PER NJDOT COMMENTS
2	4/15/20	BAK	REVISED PER CURB CHANGES
3	6/17/20	BAK	REVISED FOR SCD SUBMISSION
4	7/7/20	BAK	REVISED PER SCD COMMENTS
5	3/31/21	BAK	REVISED PER TOWNSHIP COMMENTS
6	4/2/21	BAK	REVISED PER NJDOT COMMENTS
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-


  
**CARL P. O'BRIEN**  
 NEW JERSEY PROFESSIONAL  
 ENGINEER - LICENSE NUMBER: GE45154

CONSTRUCTION PLANS

FOR


NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS

TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY

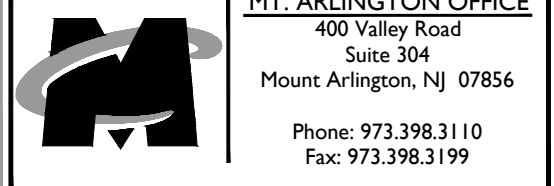


SCALE: AS SHOWN	DATE: 1/30/20	DRAWN BY: BAK	CHECKED BY: PWJ
PROJECT NUMBER: CDT065		DRAWING NAME: C-LAYT	

SHEET TITLE:	<div style="border: 1px solid black; padding: 10px; text-align: center; font-size: 24px; font-weight: bold;">             DIMENSION PLAN           </div>
SHEET NUMBER:	<div style="border: 1px solid black; padding: 10px; text-align: center; font-size: 36px; font-weight: bold;">             6      of      36           </div>


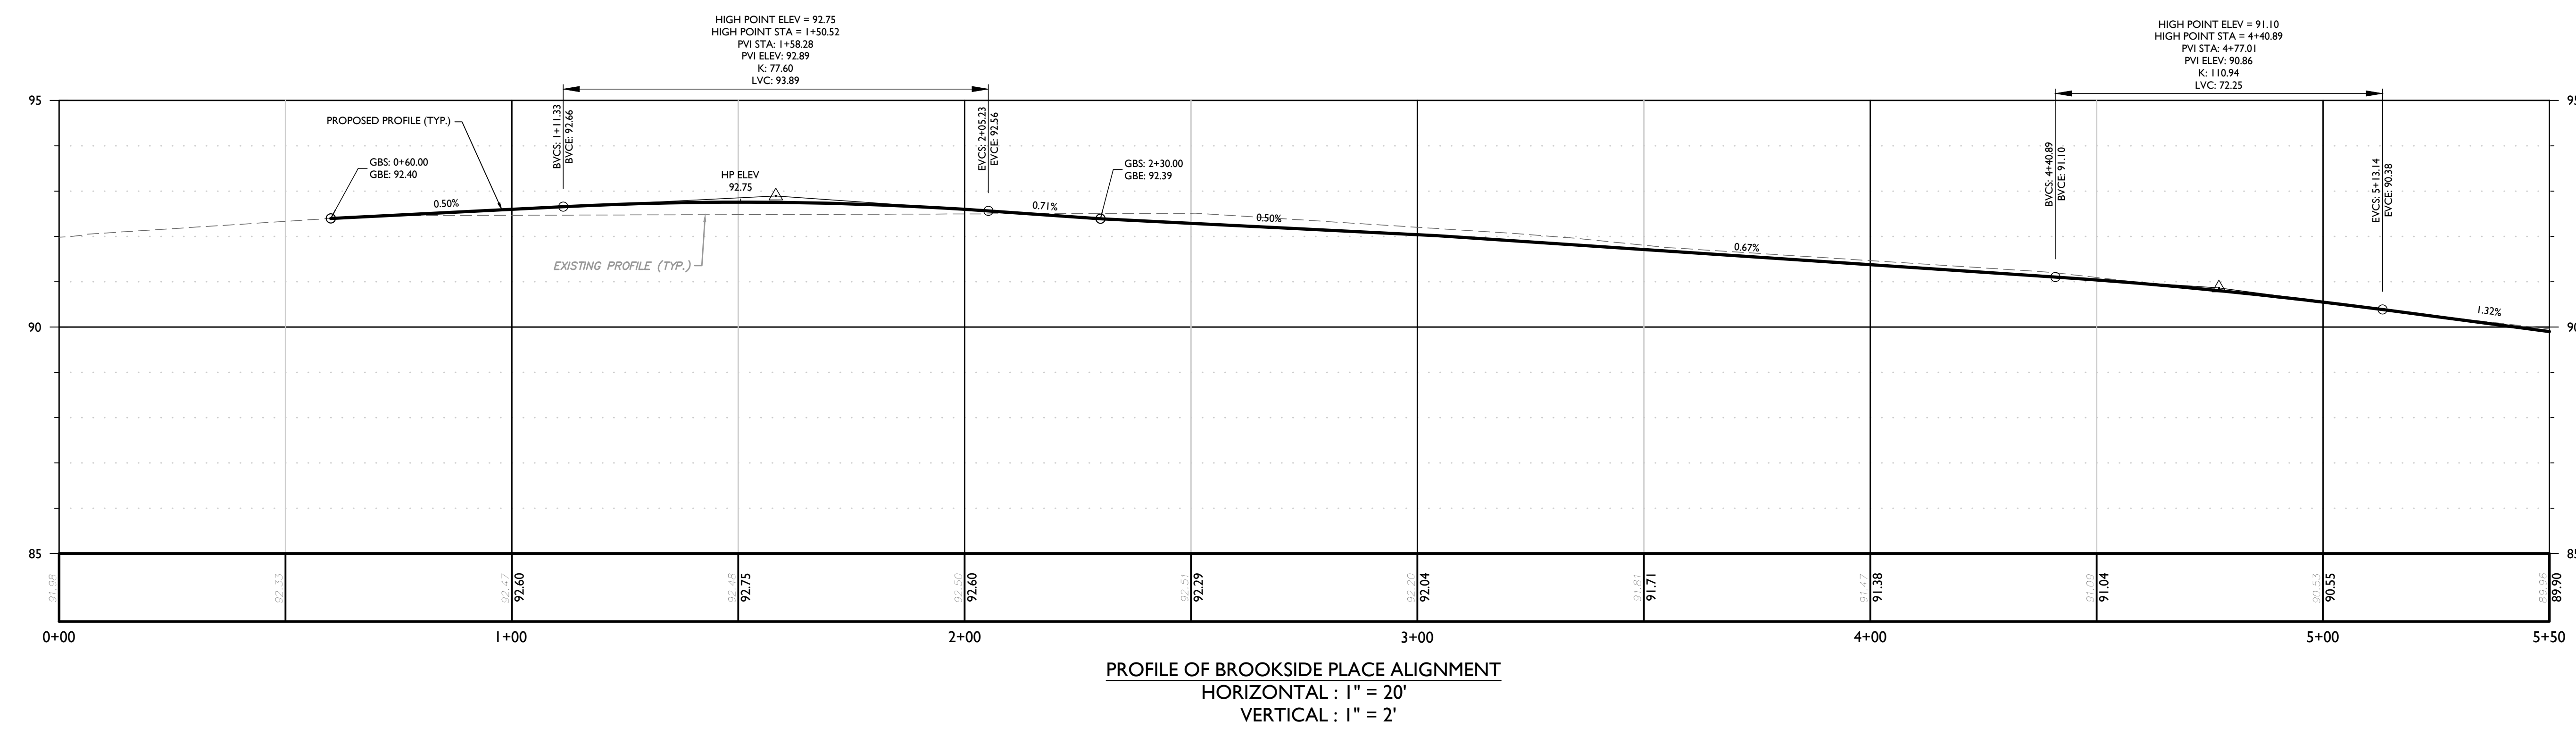


## SOIL EROSION AND SEDIMENT CONTROL PLAN

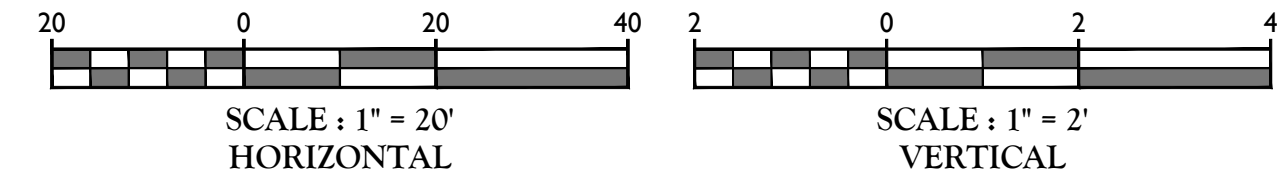



**NOTE: DO NOT SCALE DRAWINGS FOR CONSTRUCTION**



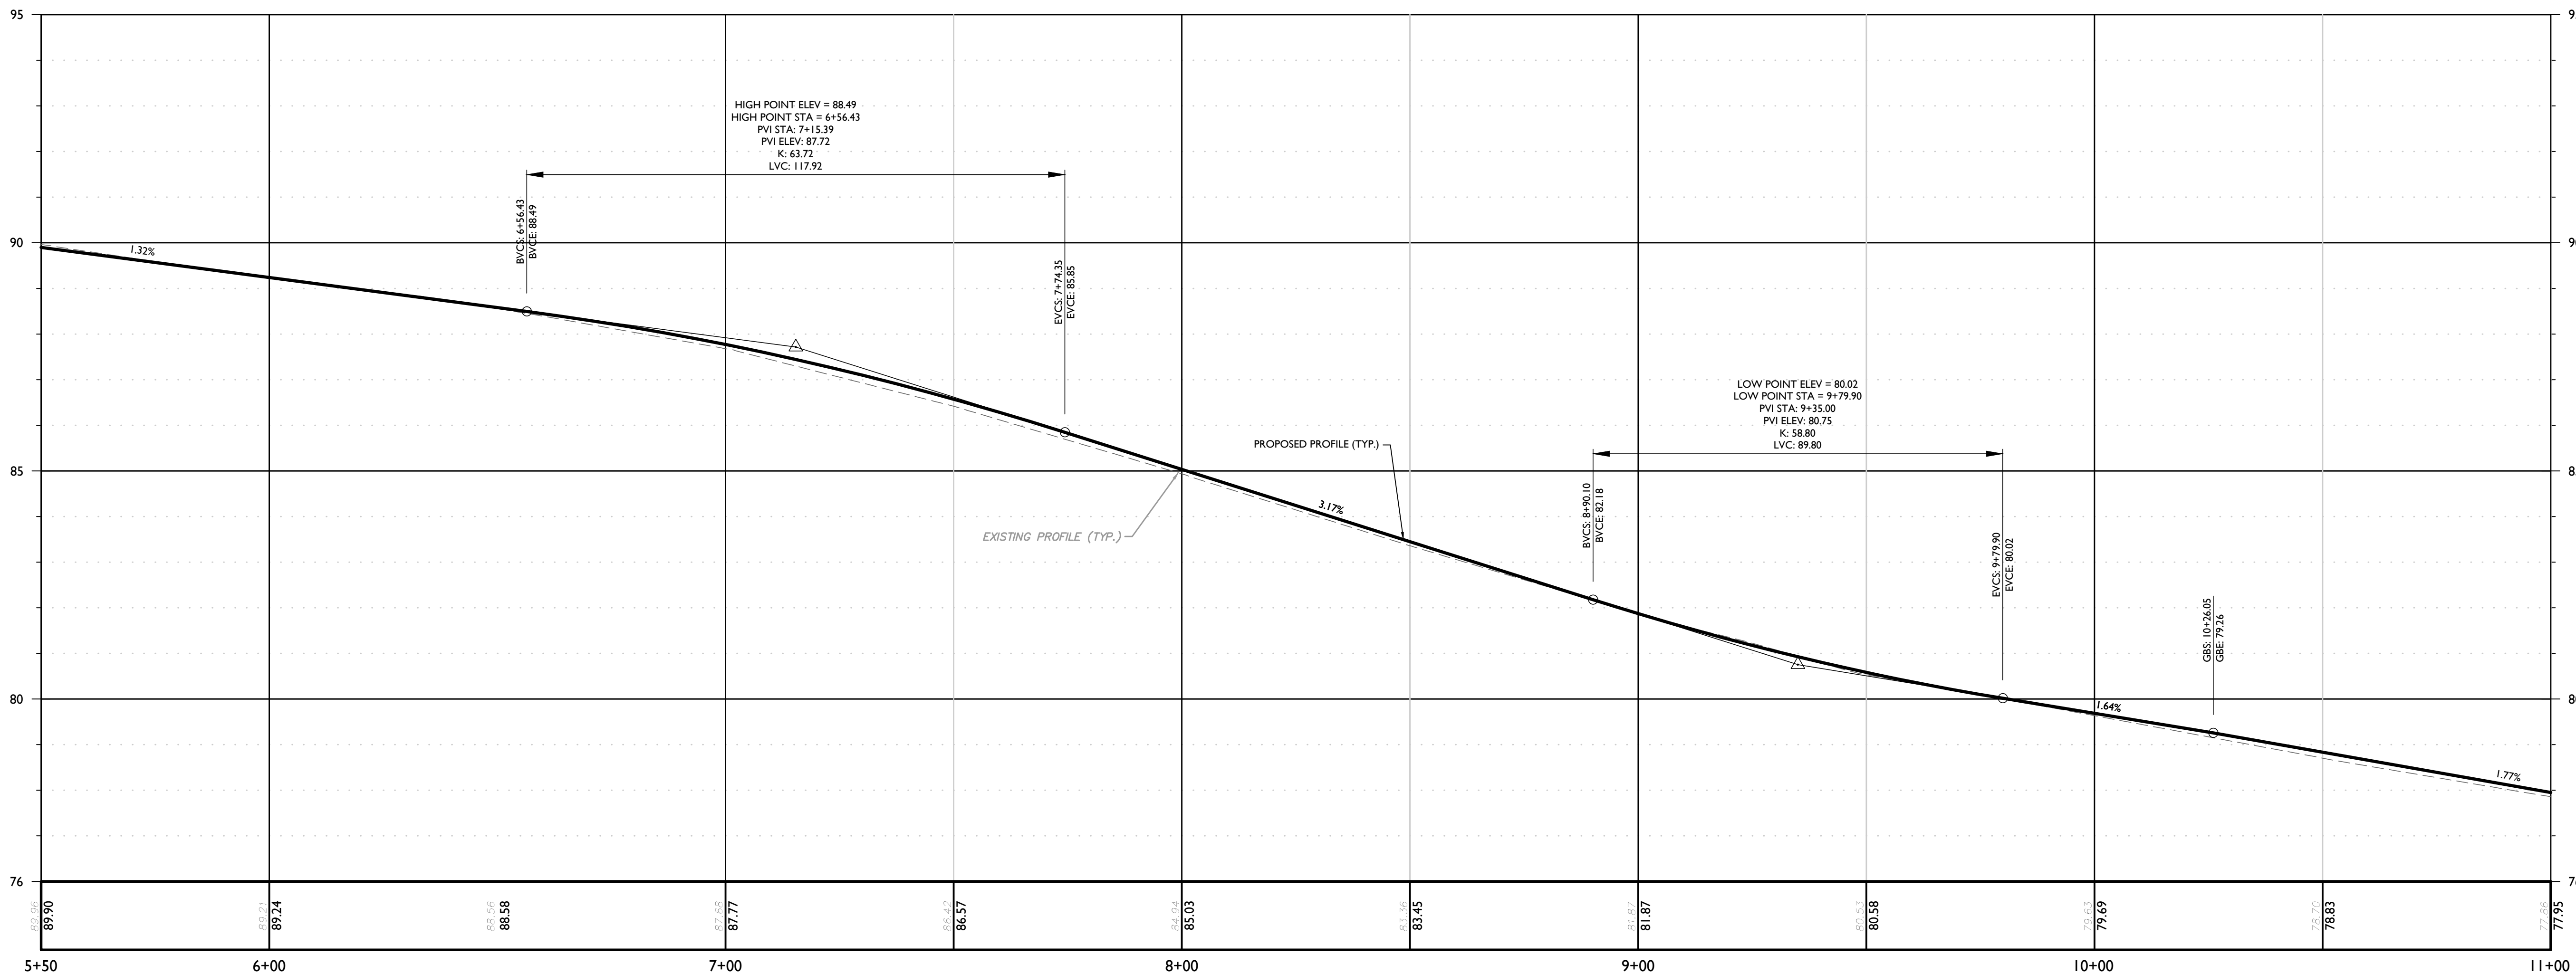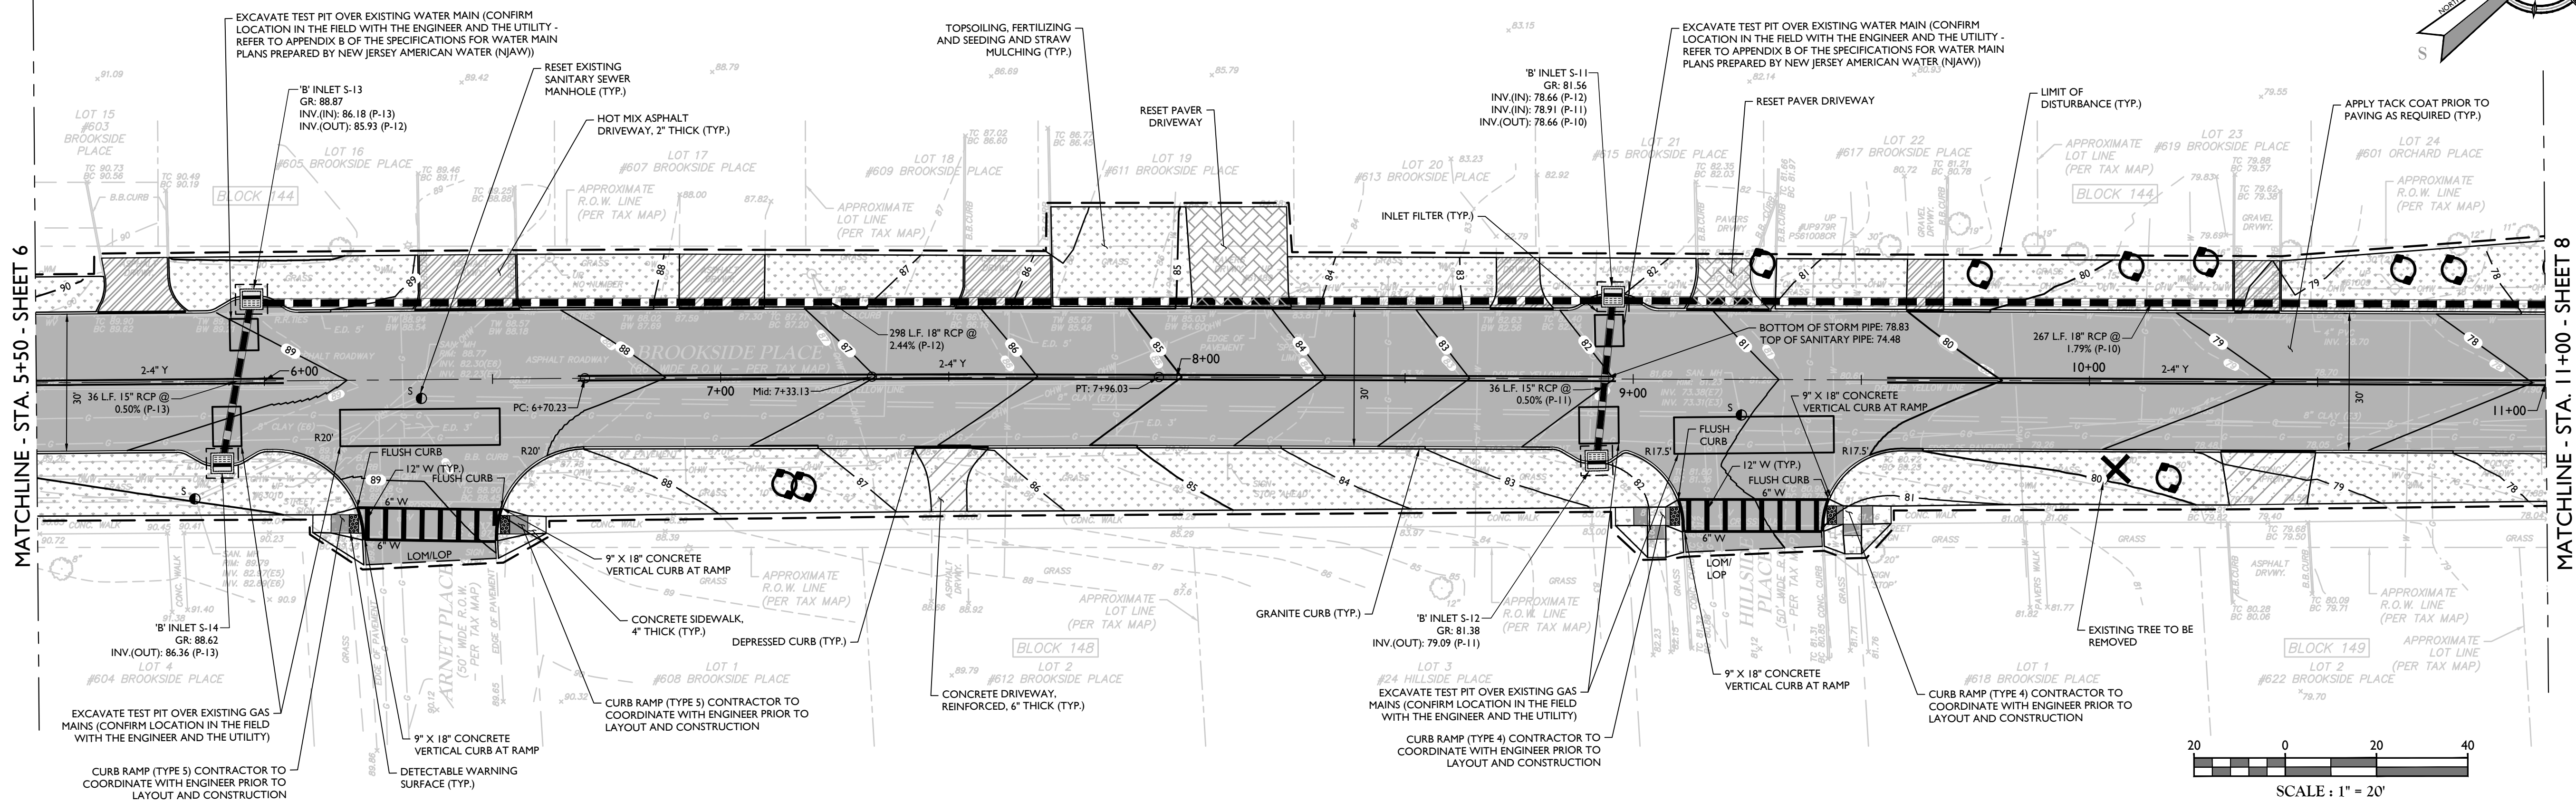

PROFILE OF BROOKSIDE PLACE ALIGNMENT  
HORIZONTAL : 1" = 20'  
VERTICAL : 1" = 2'

SOIL EROSION AND SEDIMENT CONTROL PLAN

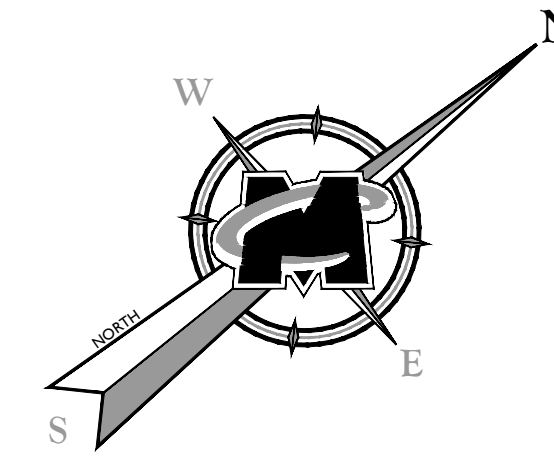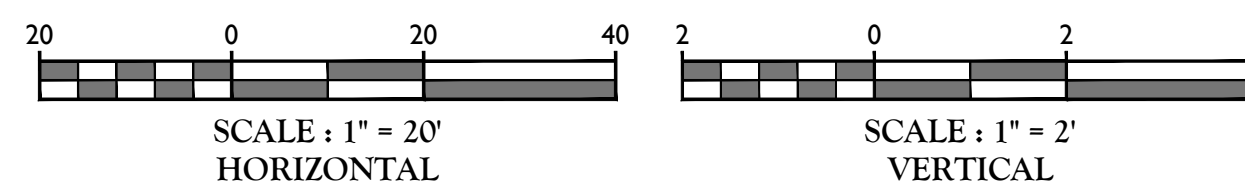

**MASER CONSULTING, P.A.**  
Customer Loyalty through Client Satisfaction  
www.maserconsulting.com  
Office Locations:  
NEW JERSEY NEW MEXICO  
NEW YORK MARYLAND  
PENNSYLVANIA GEORGIA  
VIRGINIA TEXAS  
FLORIDA TENNESSEE  
NORTH CAROLINA COLORADO  
State of NJ, C.O.A.: 24GA27986500

**811**  
Know what's below.  
Call before you dig.  
FOR STATE SPECIFIC DIRECT PHONE NUMBERS  
VISIT: WWW.CALL811.COM

REV	DATE	DRAWN BY	DESCRIPTION
1	6/8/20	BAK	REVISED PER NJDOT COMMENTS
2	6/15/20	BAK	REVISED PER CURB CHANGES
3	6/17/20	BAK	REVISED FOR SCD SUBMISSION
4	7/7/20	BAK	REVISED PER SCD COMMENTS
5	3/5/21	BAK	REVISED PER TOWNSHIP COMMENTS
6	4/2/21	BAK	REVISED PER NJDOT COMMENTS

*Carl P. O'Brien*  
**CARL P. O'BRIEN**  
NEW JERSEY PROFESSIONAL  
ENGINEER - LICENSE NUMBER: GE45154

CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS  
TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY




**M.T. ARLINGTON OFFICE**  
400 Valley Road  
Suite 304  
Mount Arlington, NJ 07856  
Phone: 973.398.3110  
Fax: 973.398.3199

SCALE: AS SHOWN	DATE: 1/30/20	DRAWN BY: BAK	CHECKED BY: PWJ
PROJECT NUMBER: CDT065	DRAWING NAME: CLAYT		

SHEET TITLE:  
**DIMENSION PLAN**  
SHEET NUMBER:  
7 of 36

NOTE: DO NOT SCALE DRAWINGS FOR CONSTRUCTION.



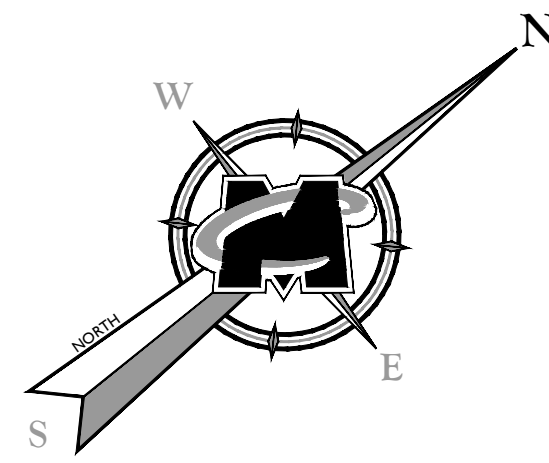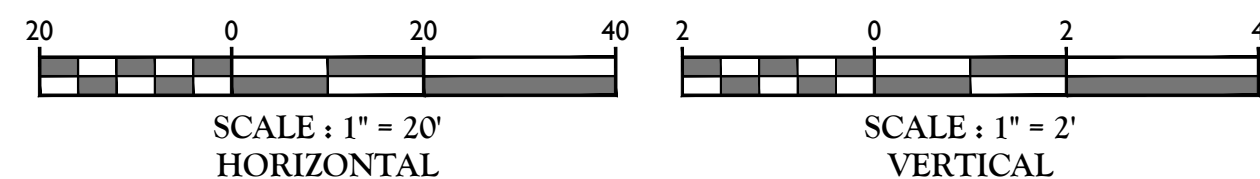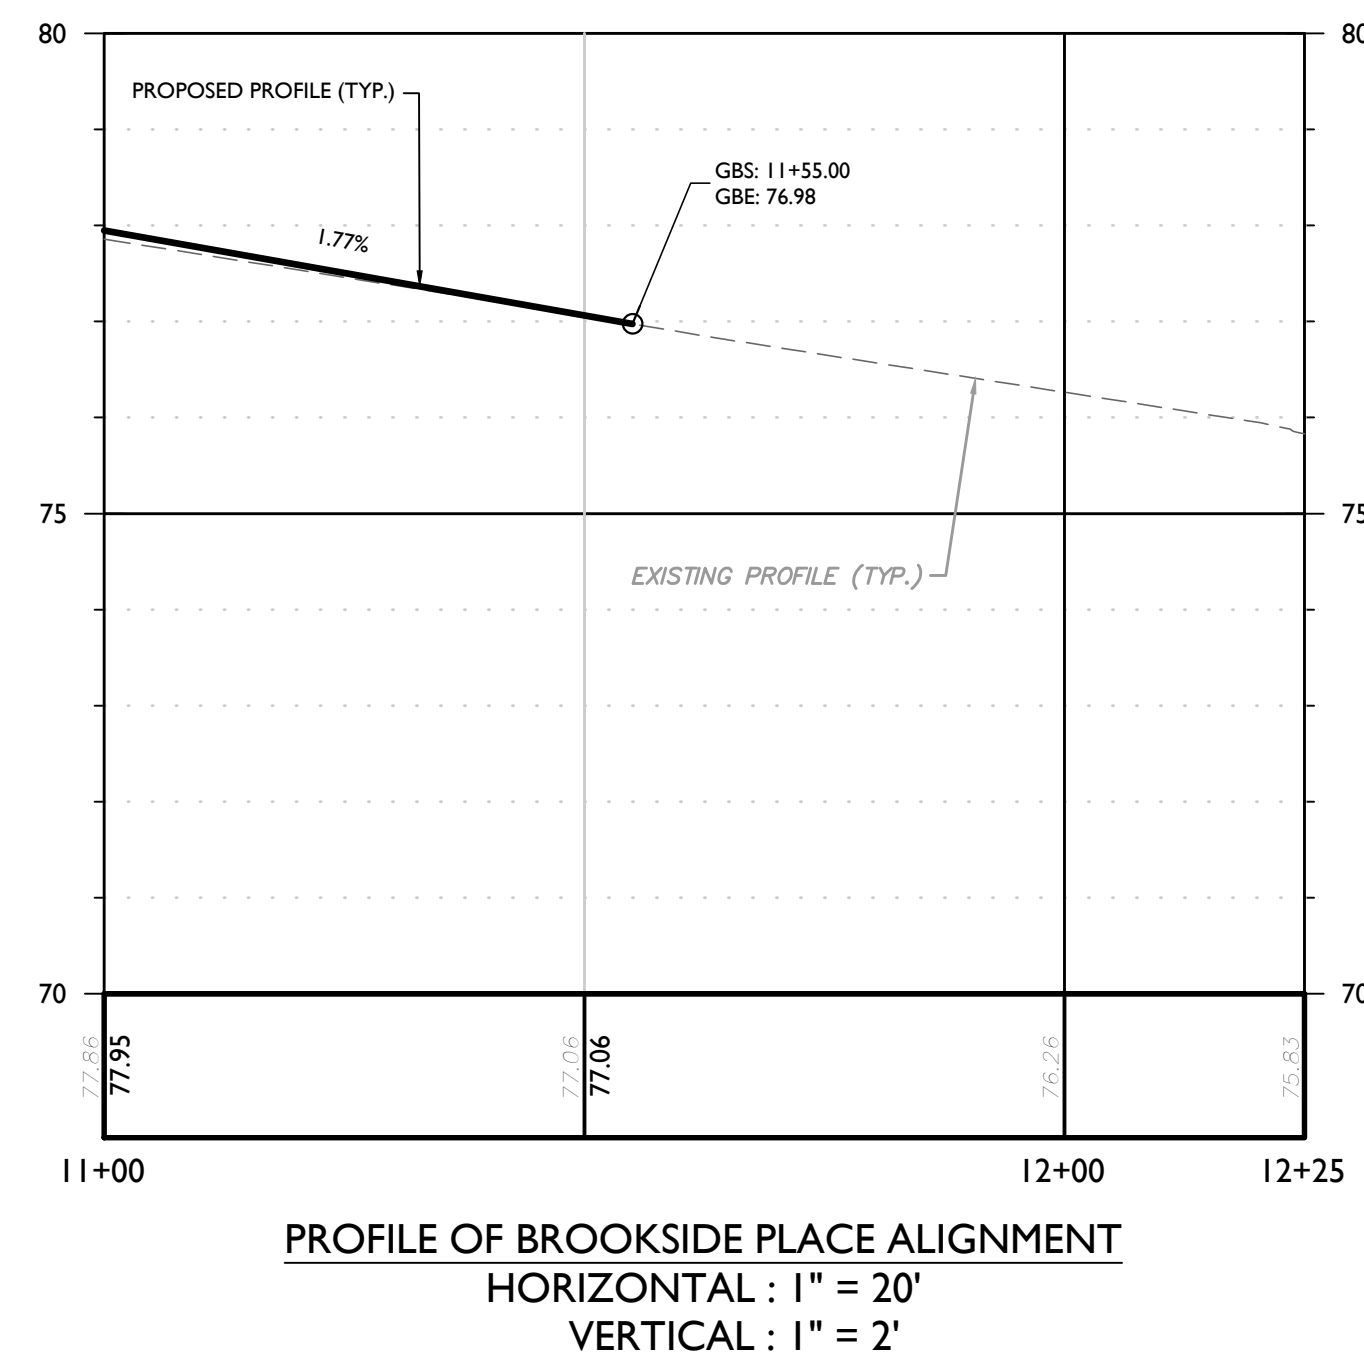

**MASER**  
CONSULTING, P.A.

Customer Loyalty through Client Satisfaction  
[www.maserconsulting.com](http://www.maserconsulting.com)

Office Locations:

■ NEW JERSEY	■ NEW MEXICO
■ NEW YORK	■ MARYLAND
■ PENNSYLVANIA	■ GEORGIA
■ VIRGINIA	■ TEXAS
■ FLORIDA	■ TENNESSEE
■ NORTH CAROLINA	■ COLORADO

State of N.J. C.O.A.: 24GA27986500

Copyright © 2021. Maser Consulting. All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting, P.A.

**811**

**PROTECT YOURSELF**

**ALL STATES REQUIRE NOTIFICATION OF  
EXCAVATORS, DESIGNERS, OR ANY PERSON  
PREPARING TO DISTURB THE EARTH'S  
SURFACE ANYWHERE IN ANY STATE**

Know what's **below.**  
Call before you dig.


**FOR STATE SPECIFIC DIRECT PHONE NUMBERS  
VISIT: [WWW.CALL811.COM](http://WWW.CALL811.COM)**

[illegible]

  
CARL P. O'BRIEN  
NEW JERSEY PROFESSIONAL  
ENGINEER - LICENSE NUMBER: GE45154

CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS

TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY



**MT. ARLINGTON OFFICE**  
400 Valley Road  
Suite 304  
Mount Arlington, NJ 07856



Phone: 973.398.3110  
Fax: 973.398.3199

SCALE: AS SHOWN	DATE: 1/30/20	DRAWN BY: BAK	CHECKED BY: PWJ
PROJECT NUMBER: CDT065		DRAWING NAME: C-LAYT	

SHEET TITLE:	<h1 style="margin: 0;">DIMENSION PLAN</h1>
SHEET NUMBER:	<span style="font-size: 2em;">8</span> of <span style="font-size: 2em;">36</span>



C:\DOT\GIS\Engineering\2019\CDT065\CDT065.dwg C:\LAYOUT B. BRONZ

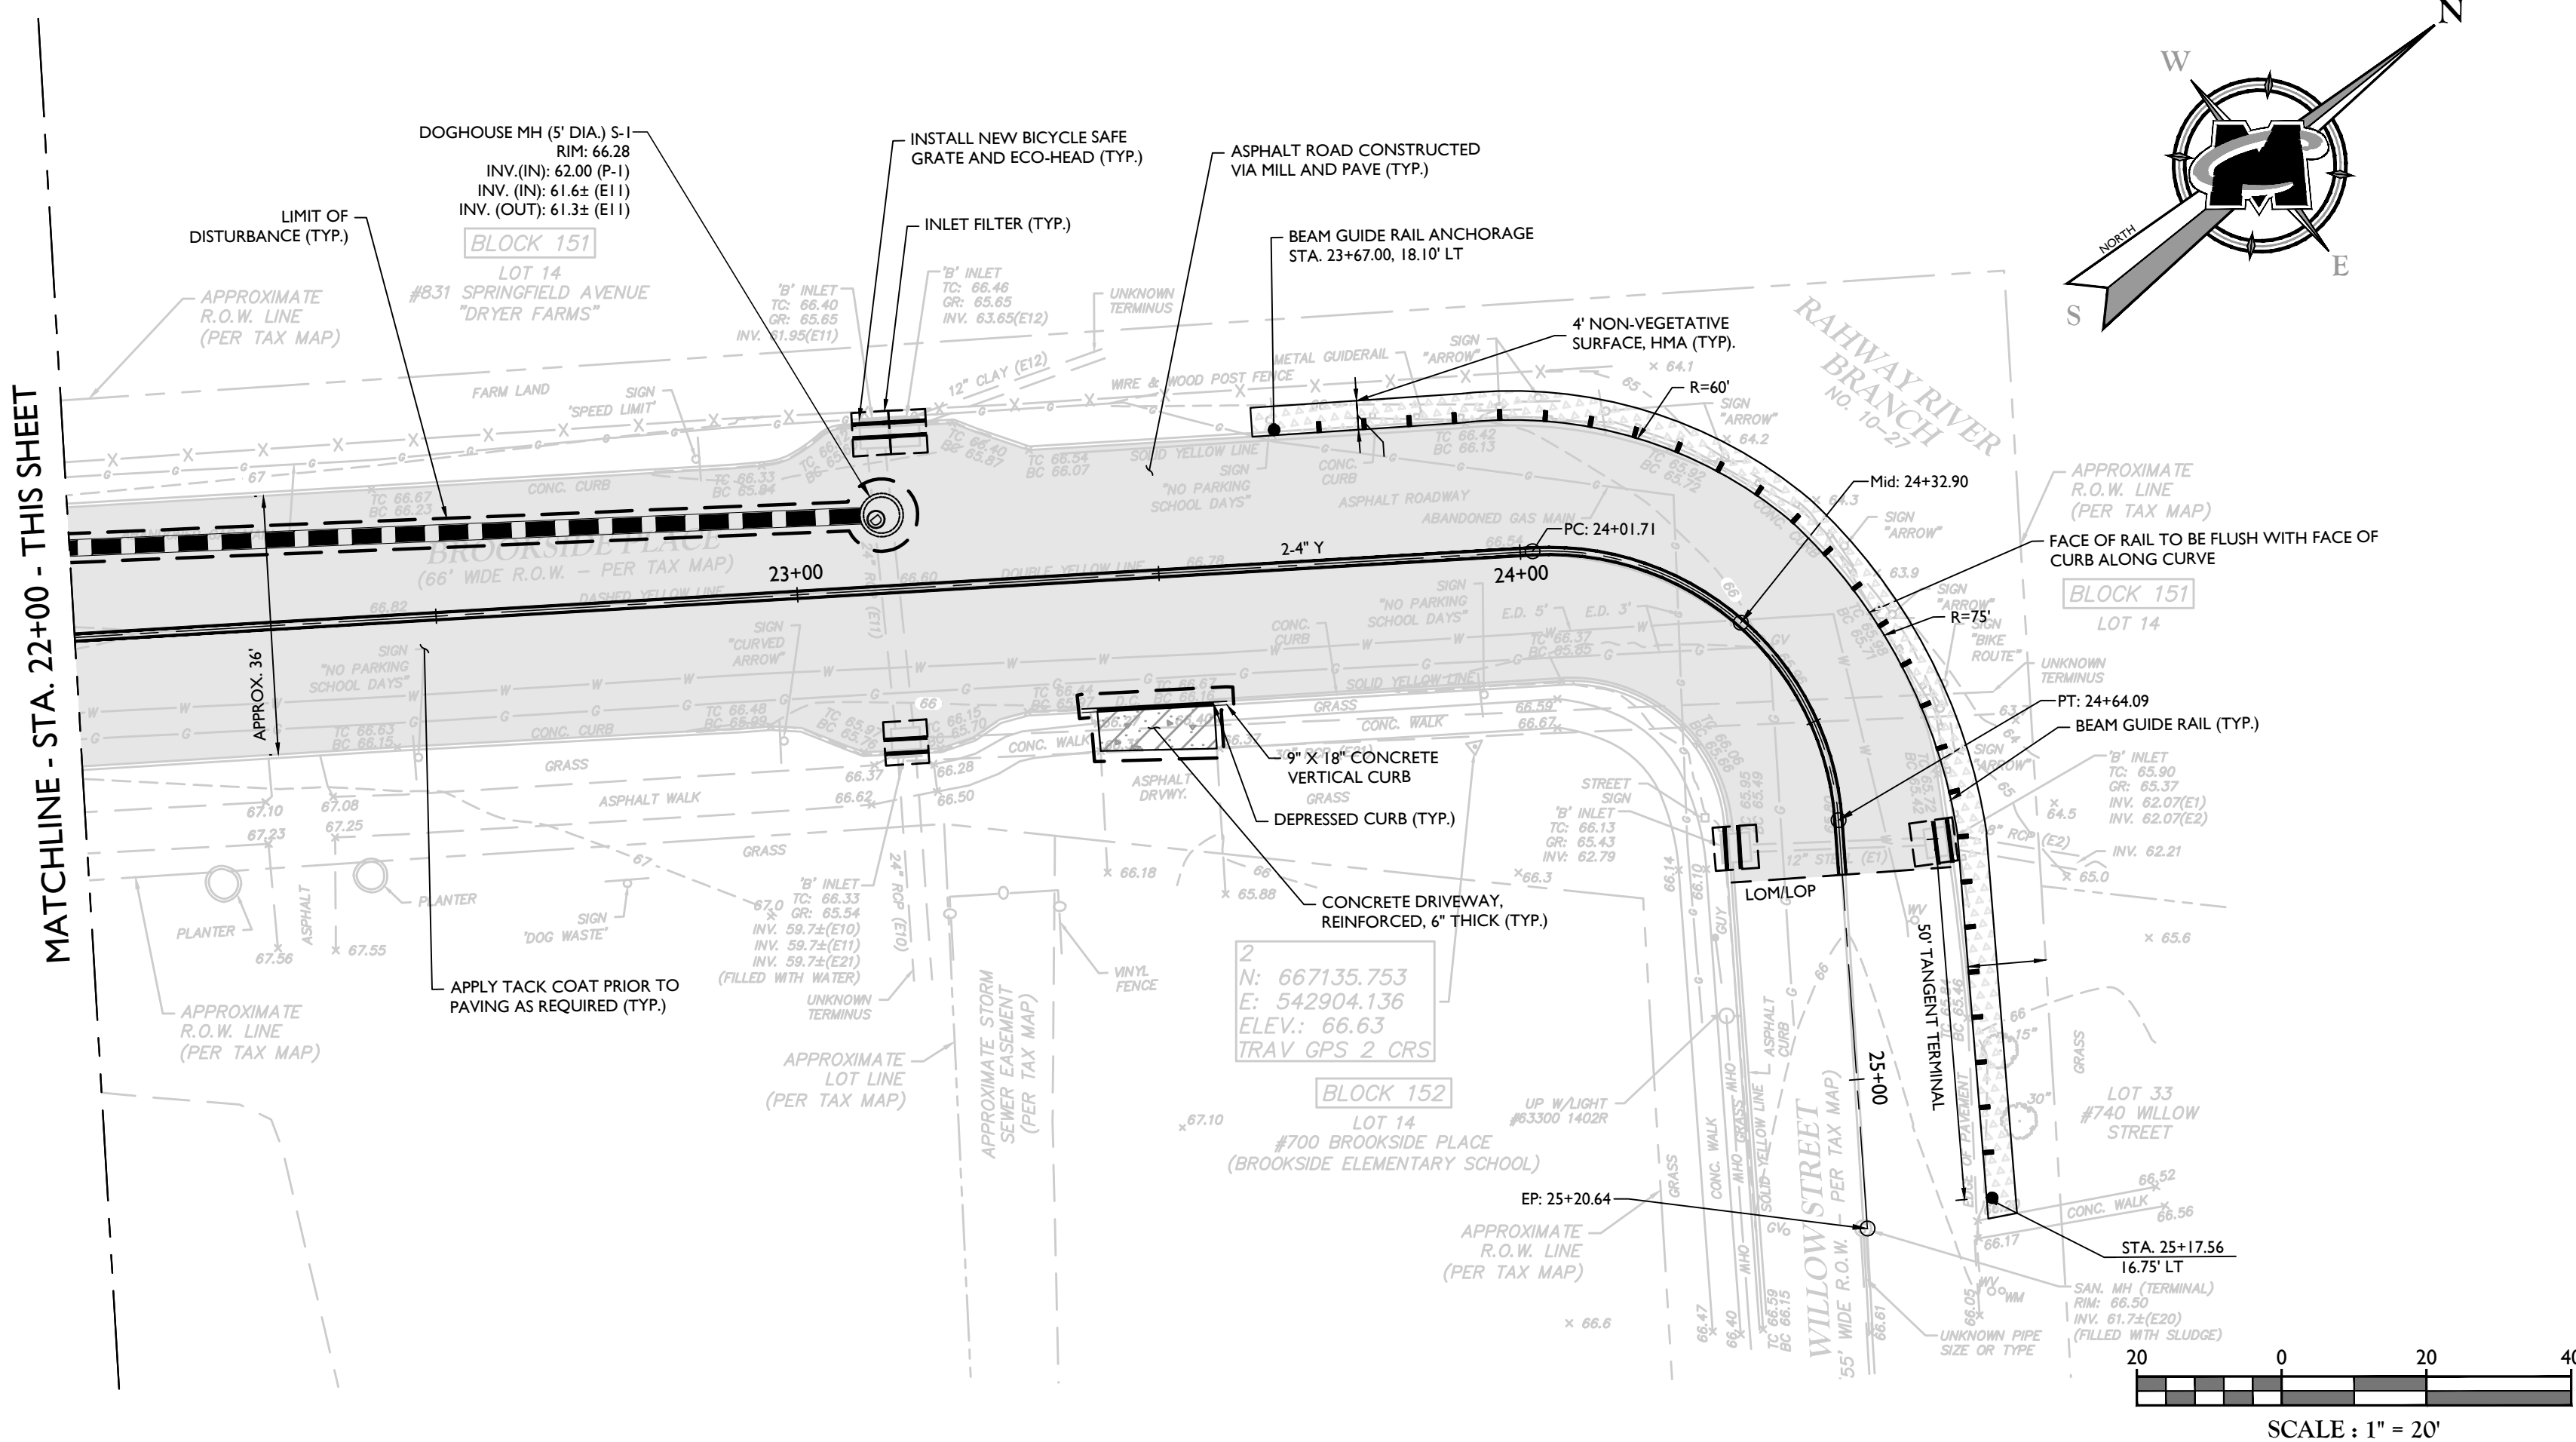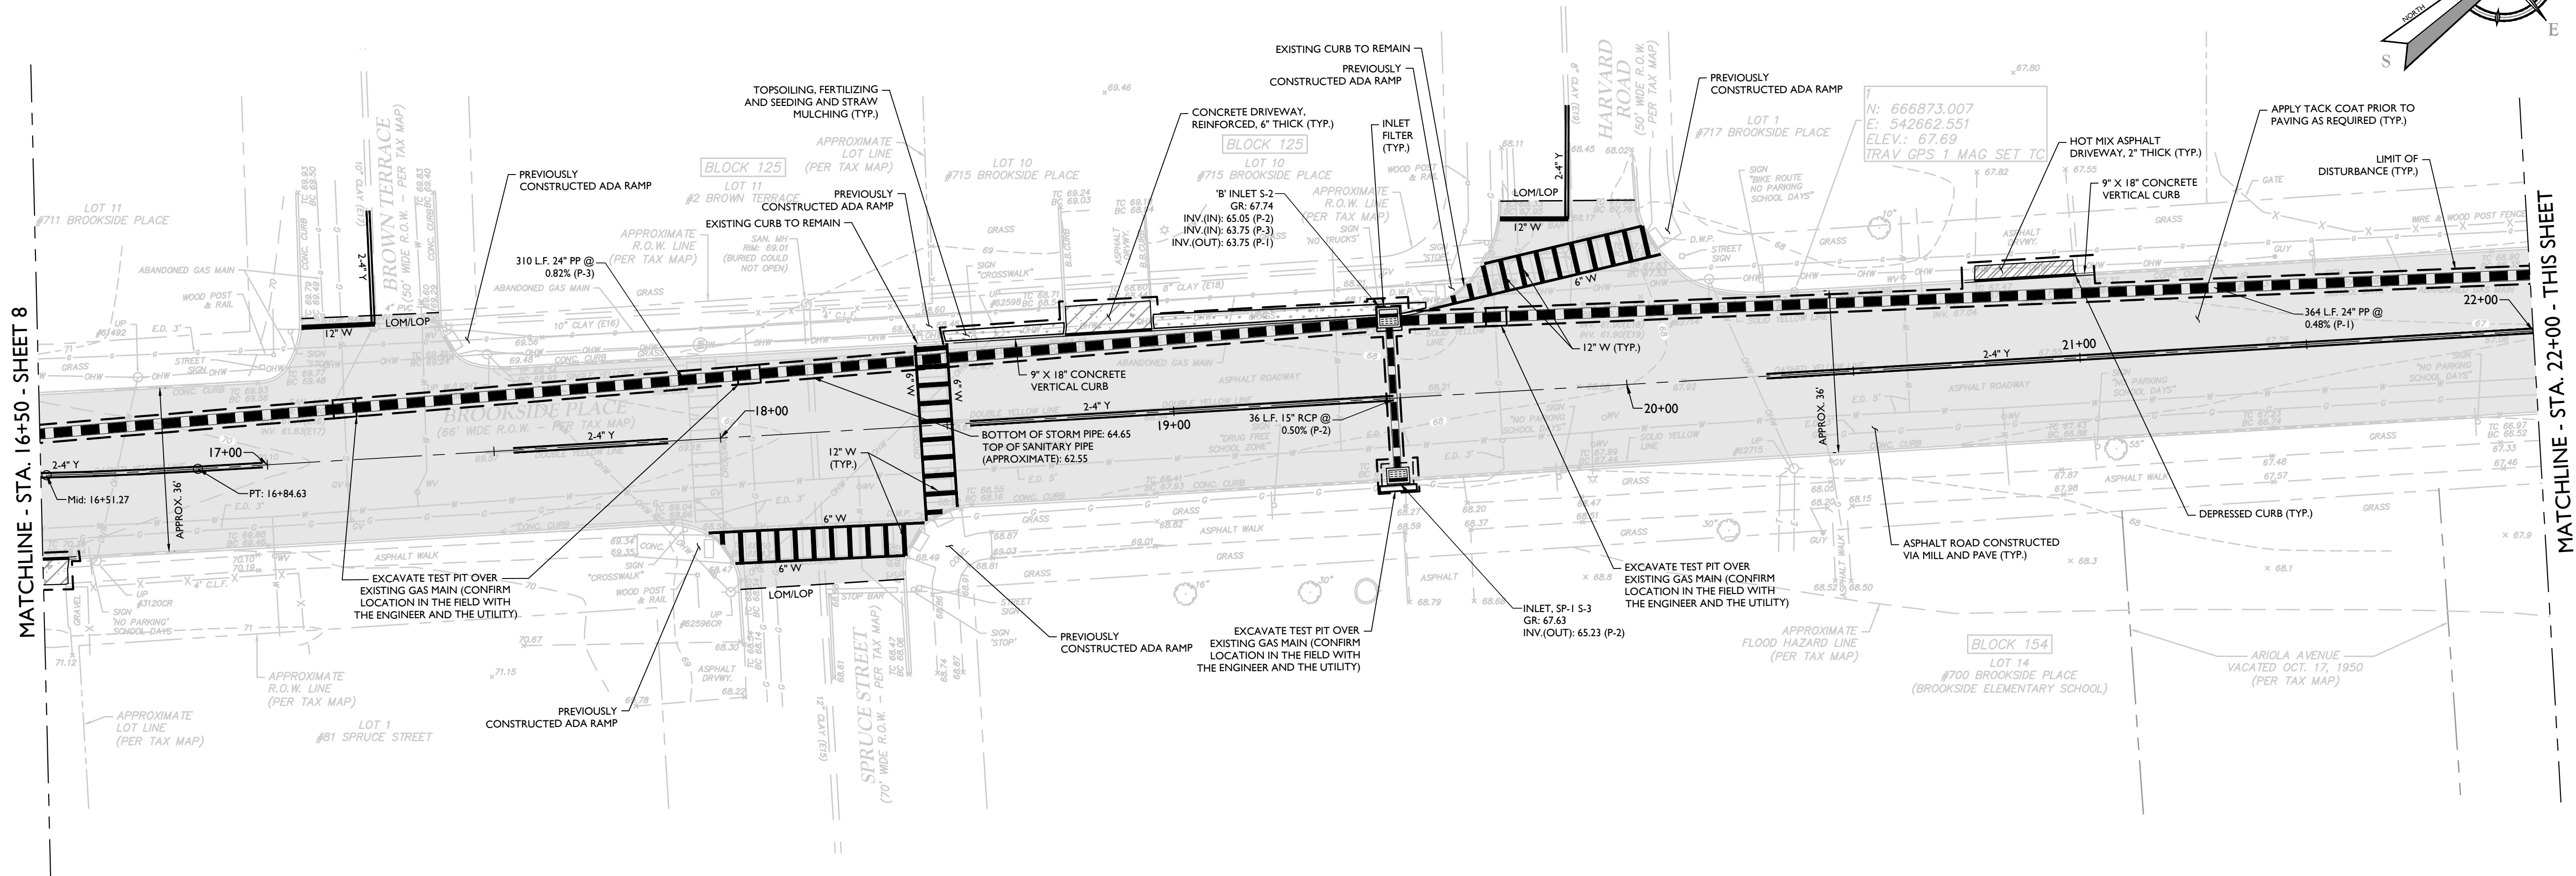

SOIL EROSION AND SEDIMENT CONTROL PLAN

**MASER CONSULTING, P.A.**  
Customer Loyalty through Client Satisfaction  
www.maserconsulting.com  
Office Locations:  
NEW JERSEY NEW MEXICO  
NEW YORK MARYLAND  
PENNSYLVANIA GEORGIA  
VIRGINIA TEXAS  
FLORIDA TENNESSEE  
NORTH CAROLINA COLORADO  
State of NJ, C.O.A.: 24GA27986500  
Copyright © 2021, Maser Consulting, All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were constructed or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting, P.A.

**811**  
Know what's below. Call before you dig.  
FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM  
PROTECT YOURSELF  
ALL STATES REQUIRE NOTIFICATION OF EXCAVATORS, DESIGNERS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE

REV	DATE	DRAWN BY	DESCRIPTION
1	6/8/20	BAK	REVISED PER NJDOT COMMENTS
2	6/15/20	BAK	REVISED PER CHAIR CHANGES
3	6/17/20	BAK	REVISED FOR SCD SUBMISSION
4	7/7/20	BAK	REVISED PER SCD COMMENTS
5	3/5/21	BAK	REVISED PER TOWNSHIP COMMENTS
6	4/2/21	BAK	REVISED PER NJDOT COMMENTS

*Carl P. O'Brien*  
**CARL P. O'BRIEN**  
NEW JERSEY PROFESSIONAL ENGINEER - LICENSE NUMBER: GE45154

CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS  
TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY

**MT. ARLINGTON OFFICE**  
400 Valley Road  
Suite 304  
Mount Arlington, NJ 07856  
Phone: 973.398.3110  
Fax: 973.398.3199

SCALE:	DATE:	DRAWN BY:	CHECKED BY:
AS SHOWN	1/30/20	BAK	PWJ


PROJECT NUMBER:	DRAWING NAME:
CDT065	CLAYT

SHEET TITLE:  
**DIMENSION PLAN**


SHEET NUMBER:  
9 of 36

NOTE: DO NOT SCALE DRAWINGS FOR CONSTRUCTION.




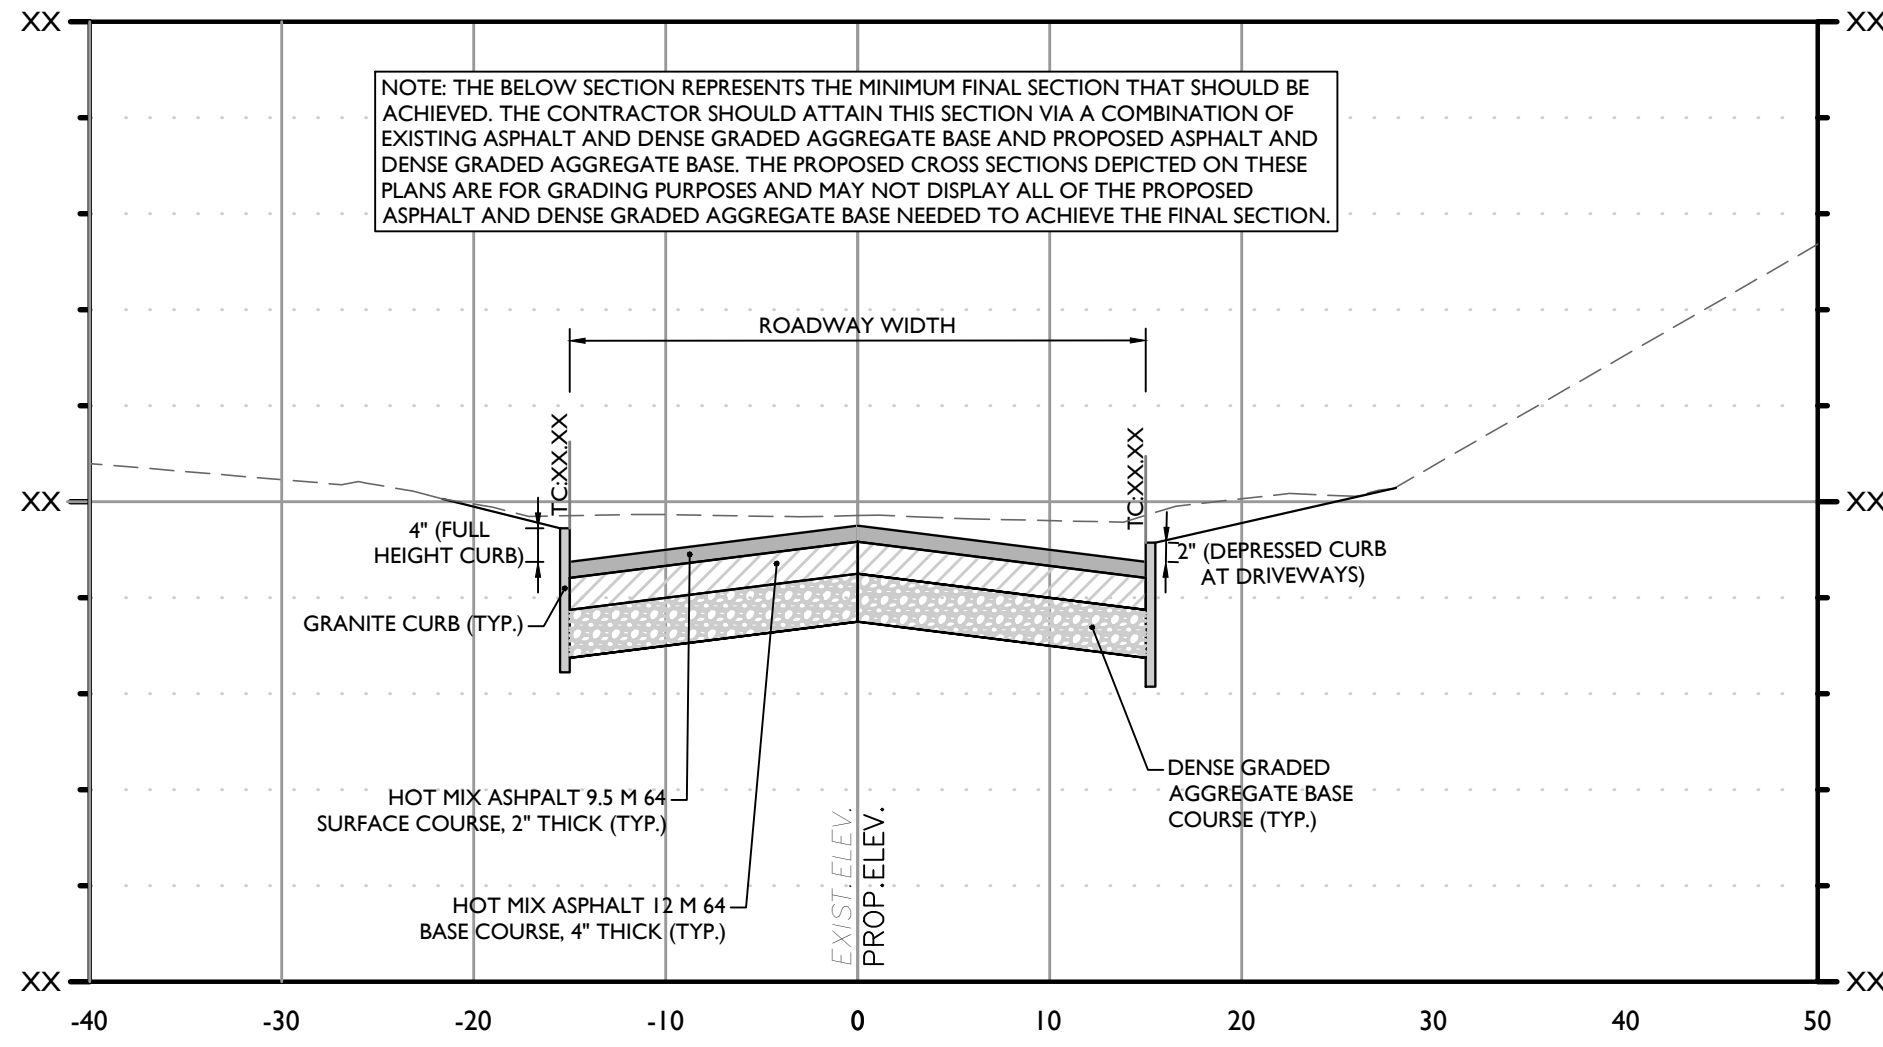


TYPICAL CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: XX+XX.XX  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

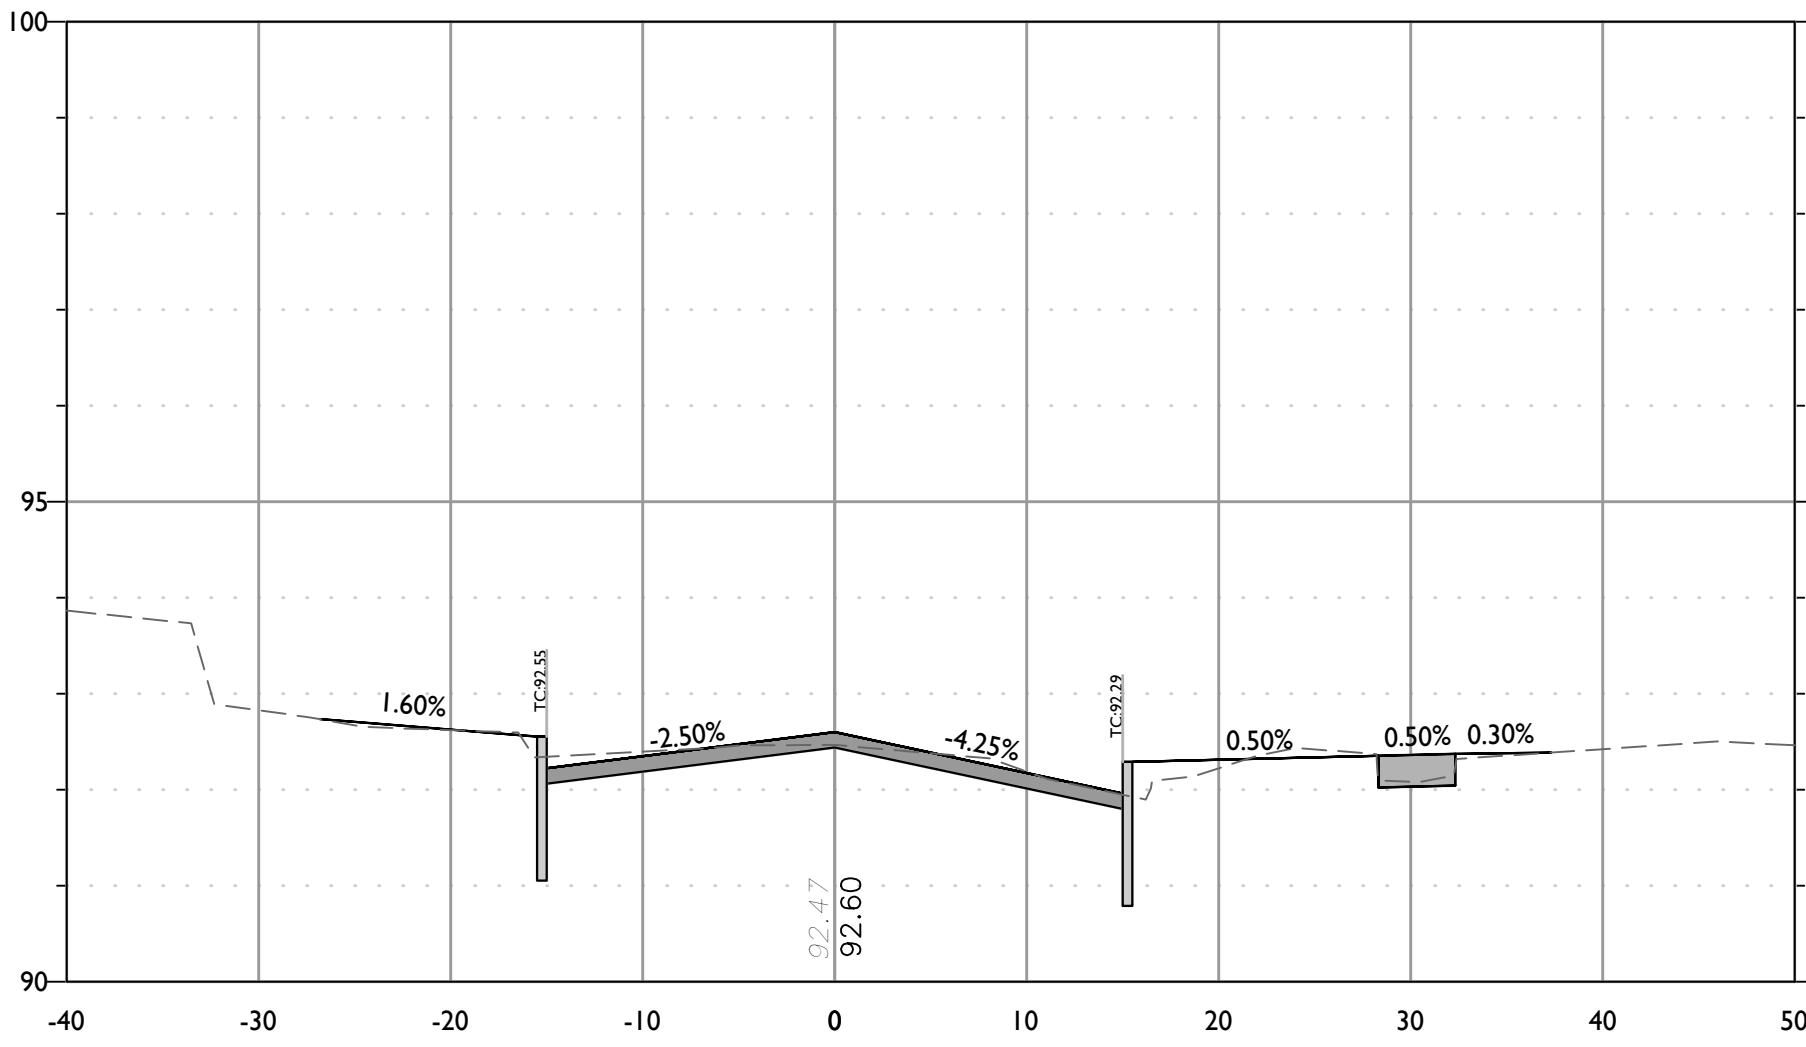


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 1+00  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

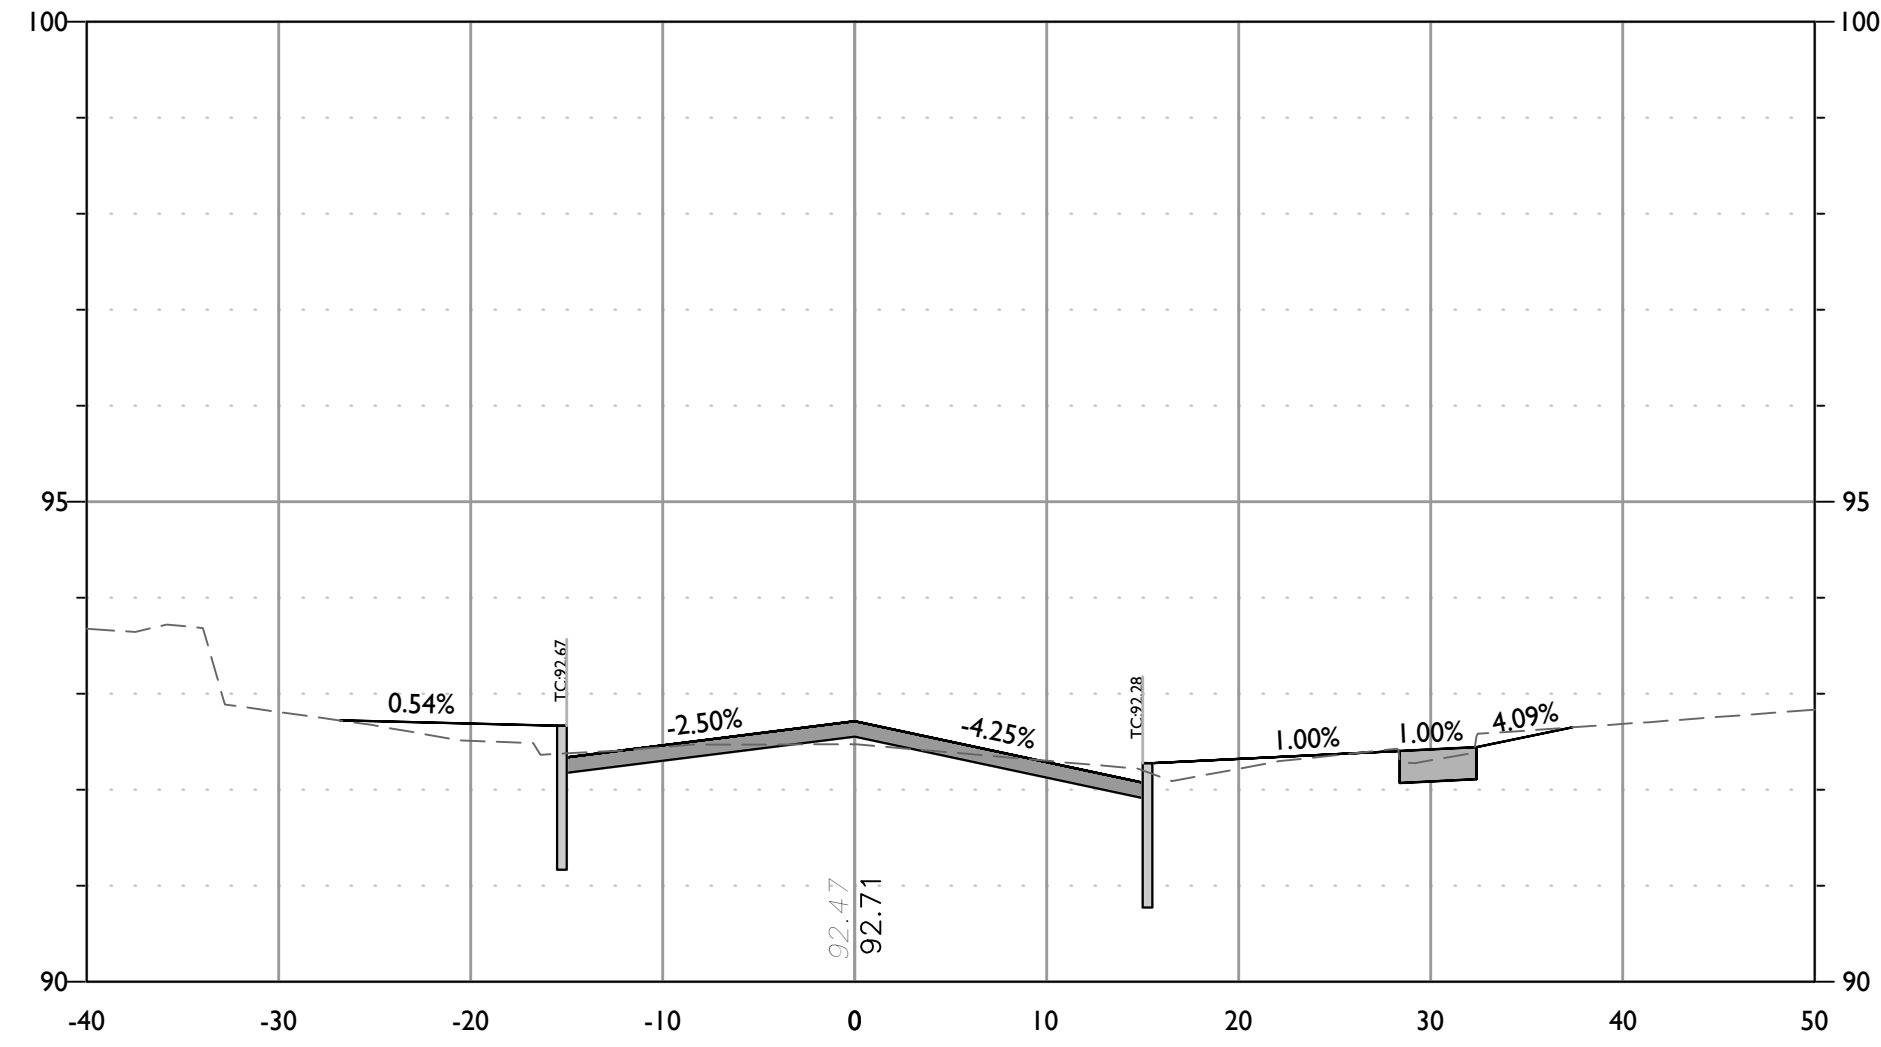


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 1+25  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

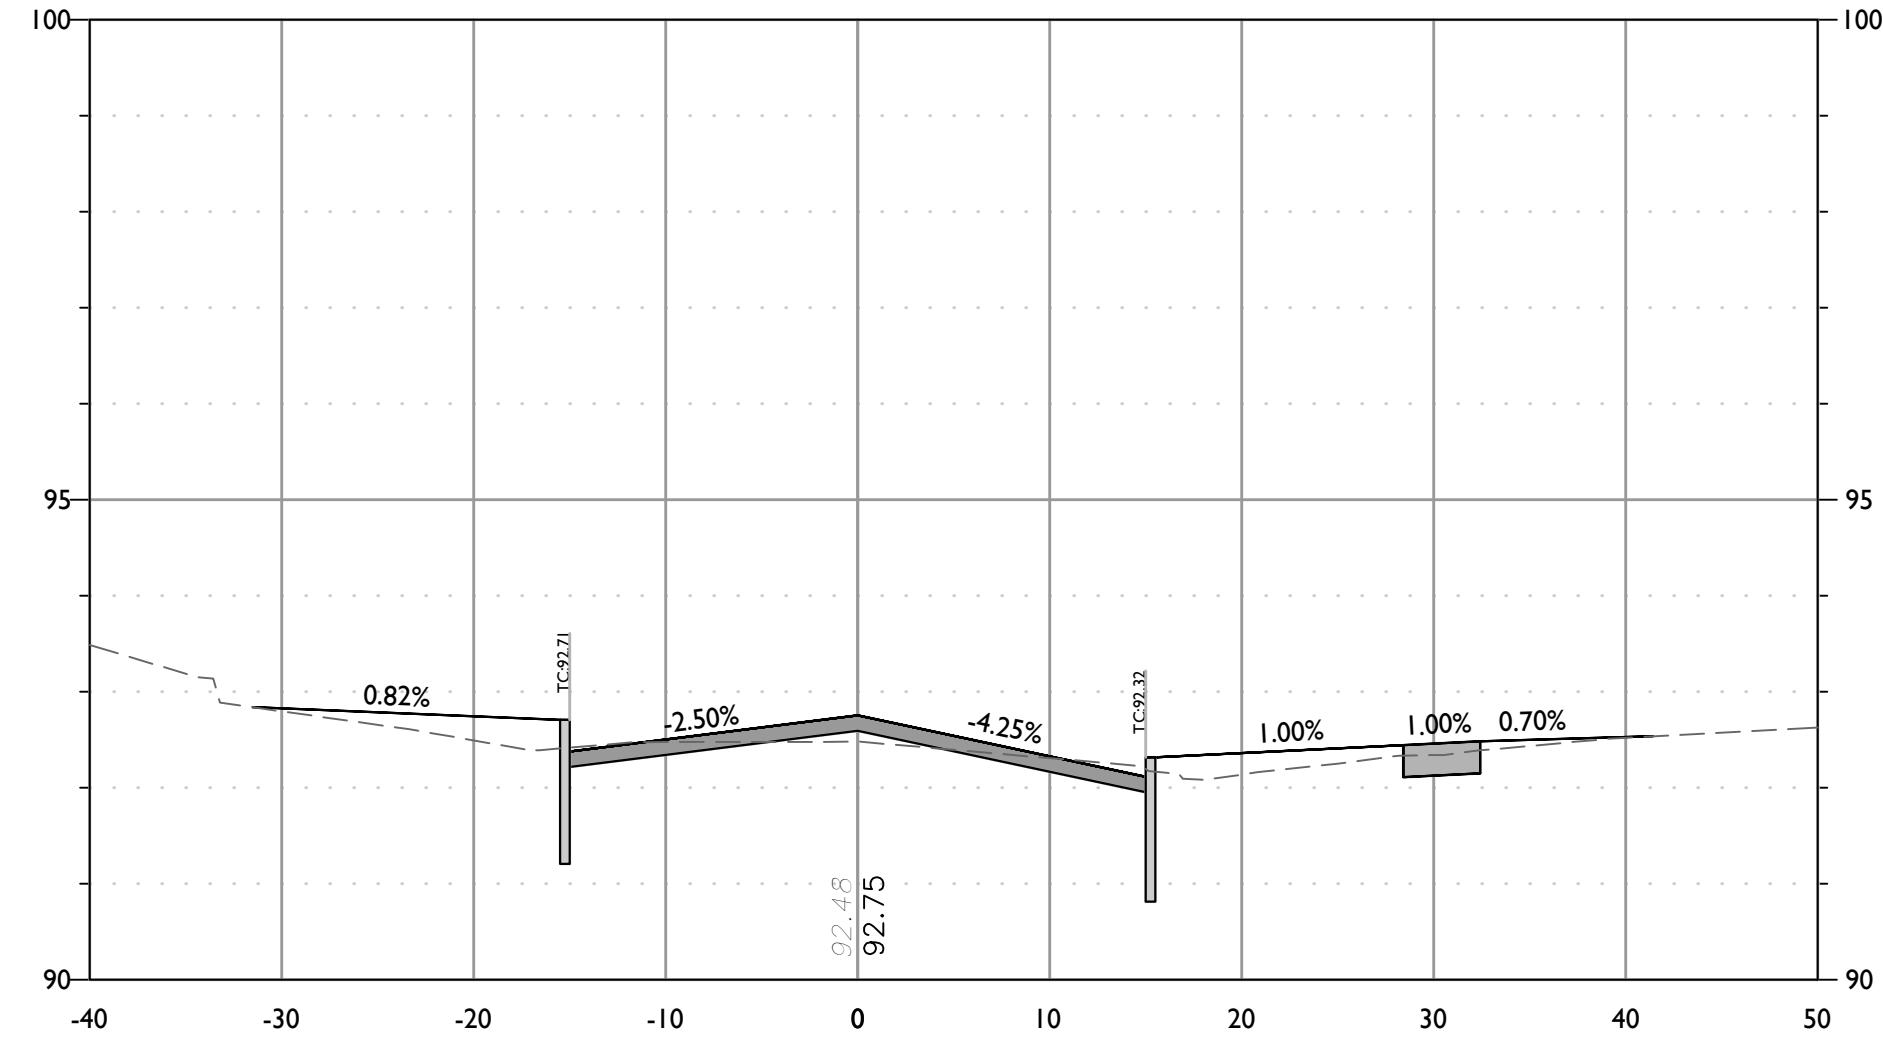


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 1+45  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

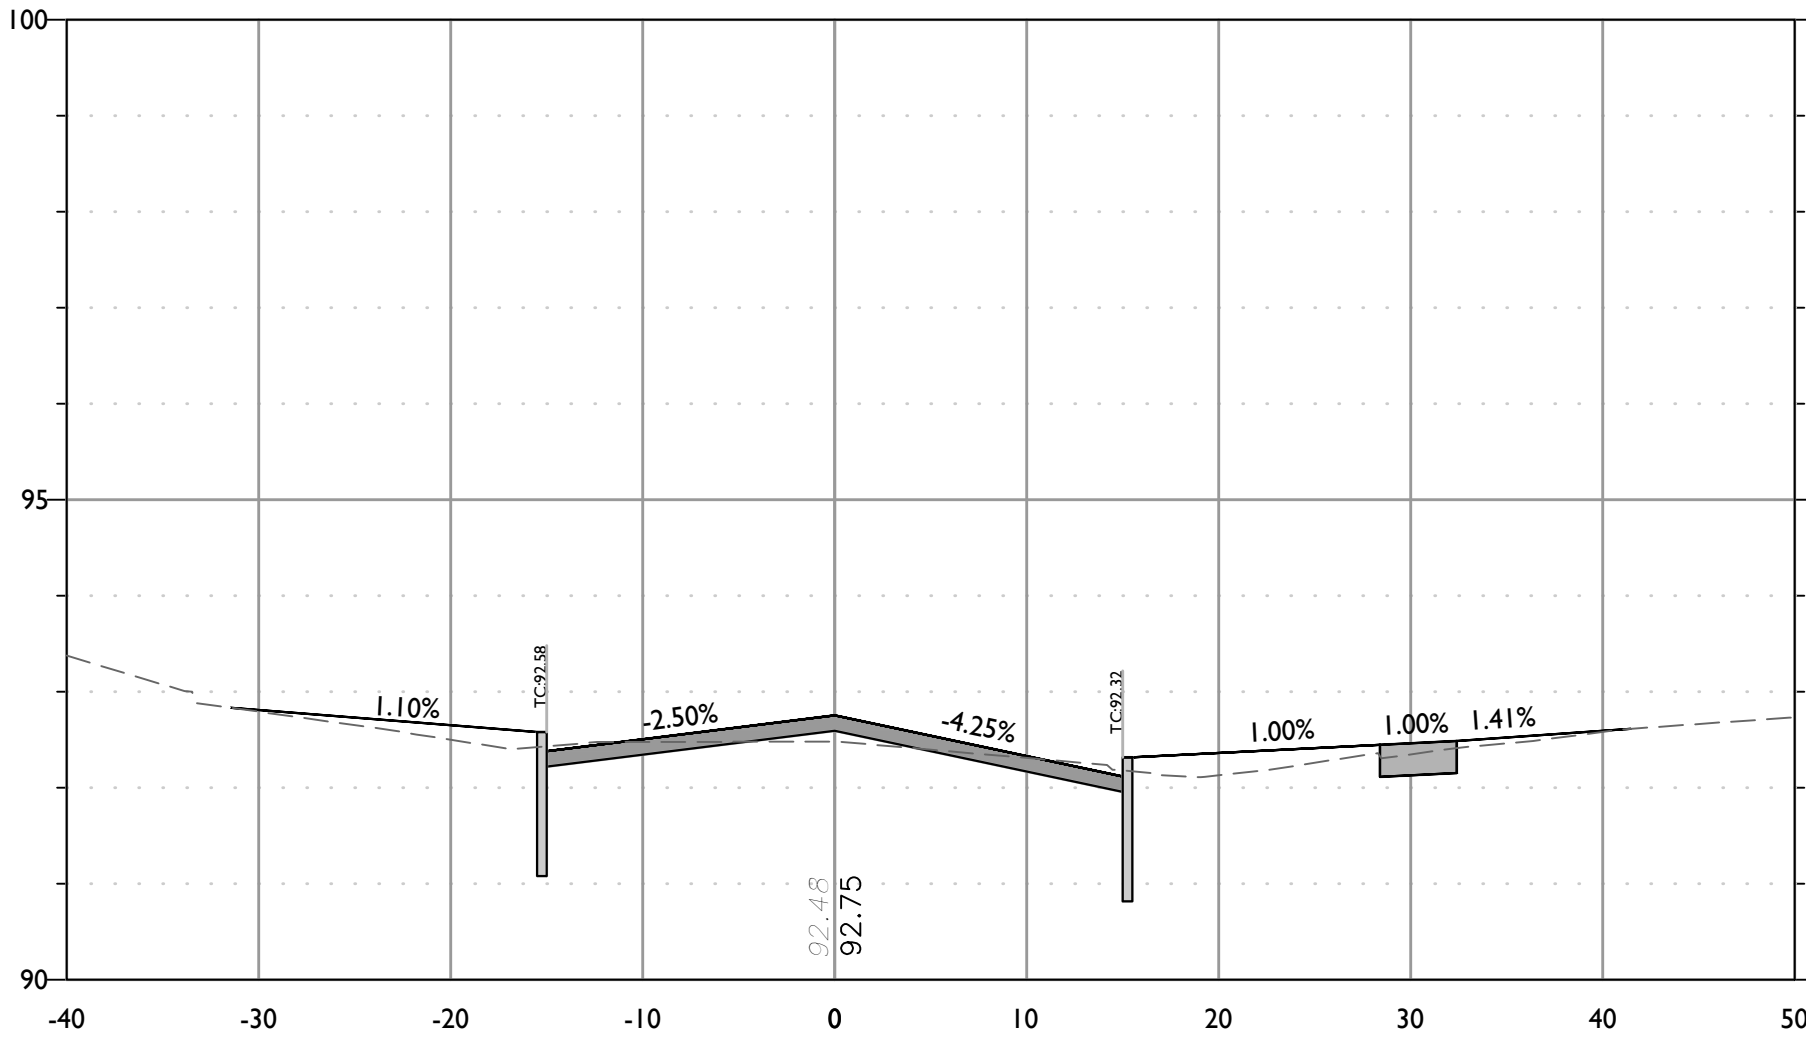


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 1+50  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

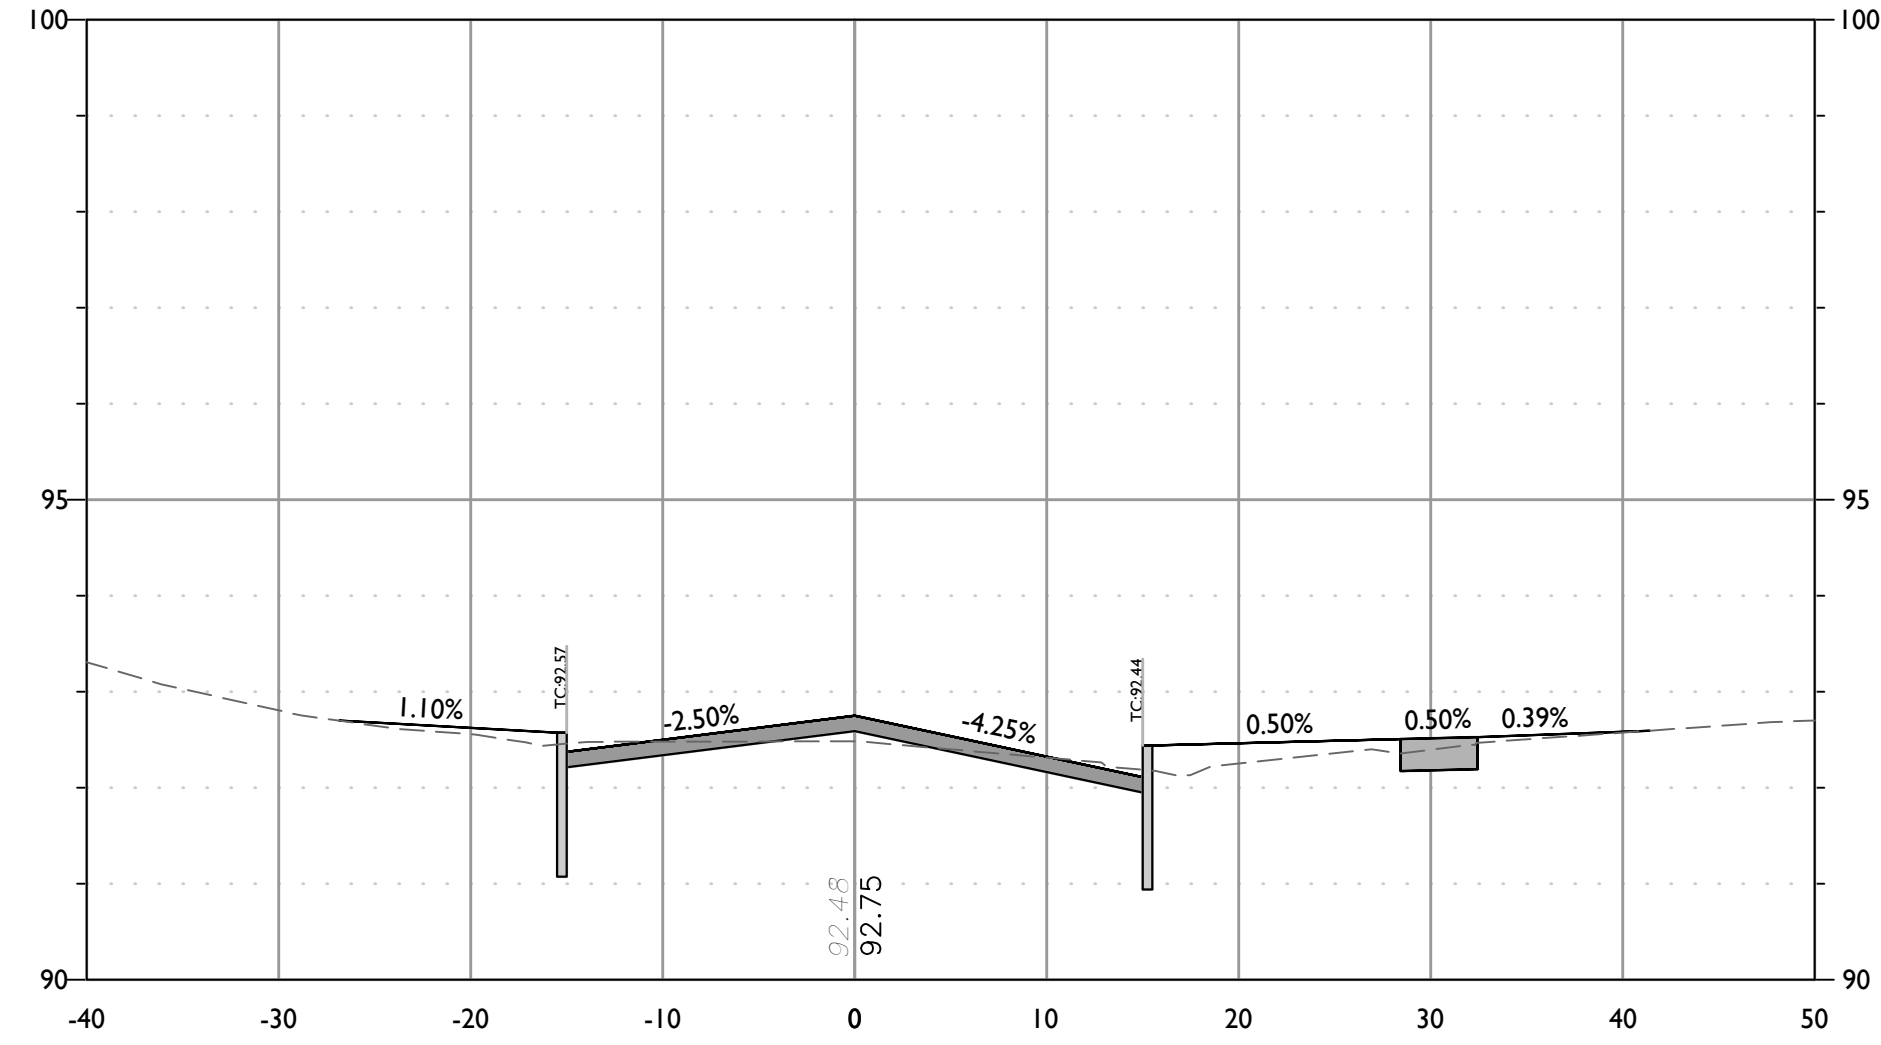


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 1+60  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

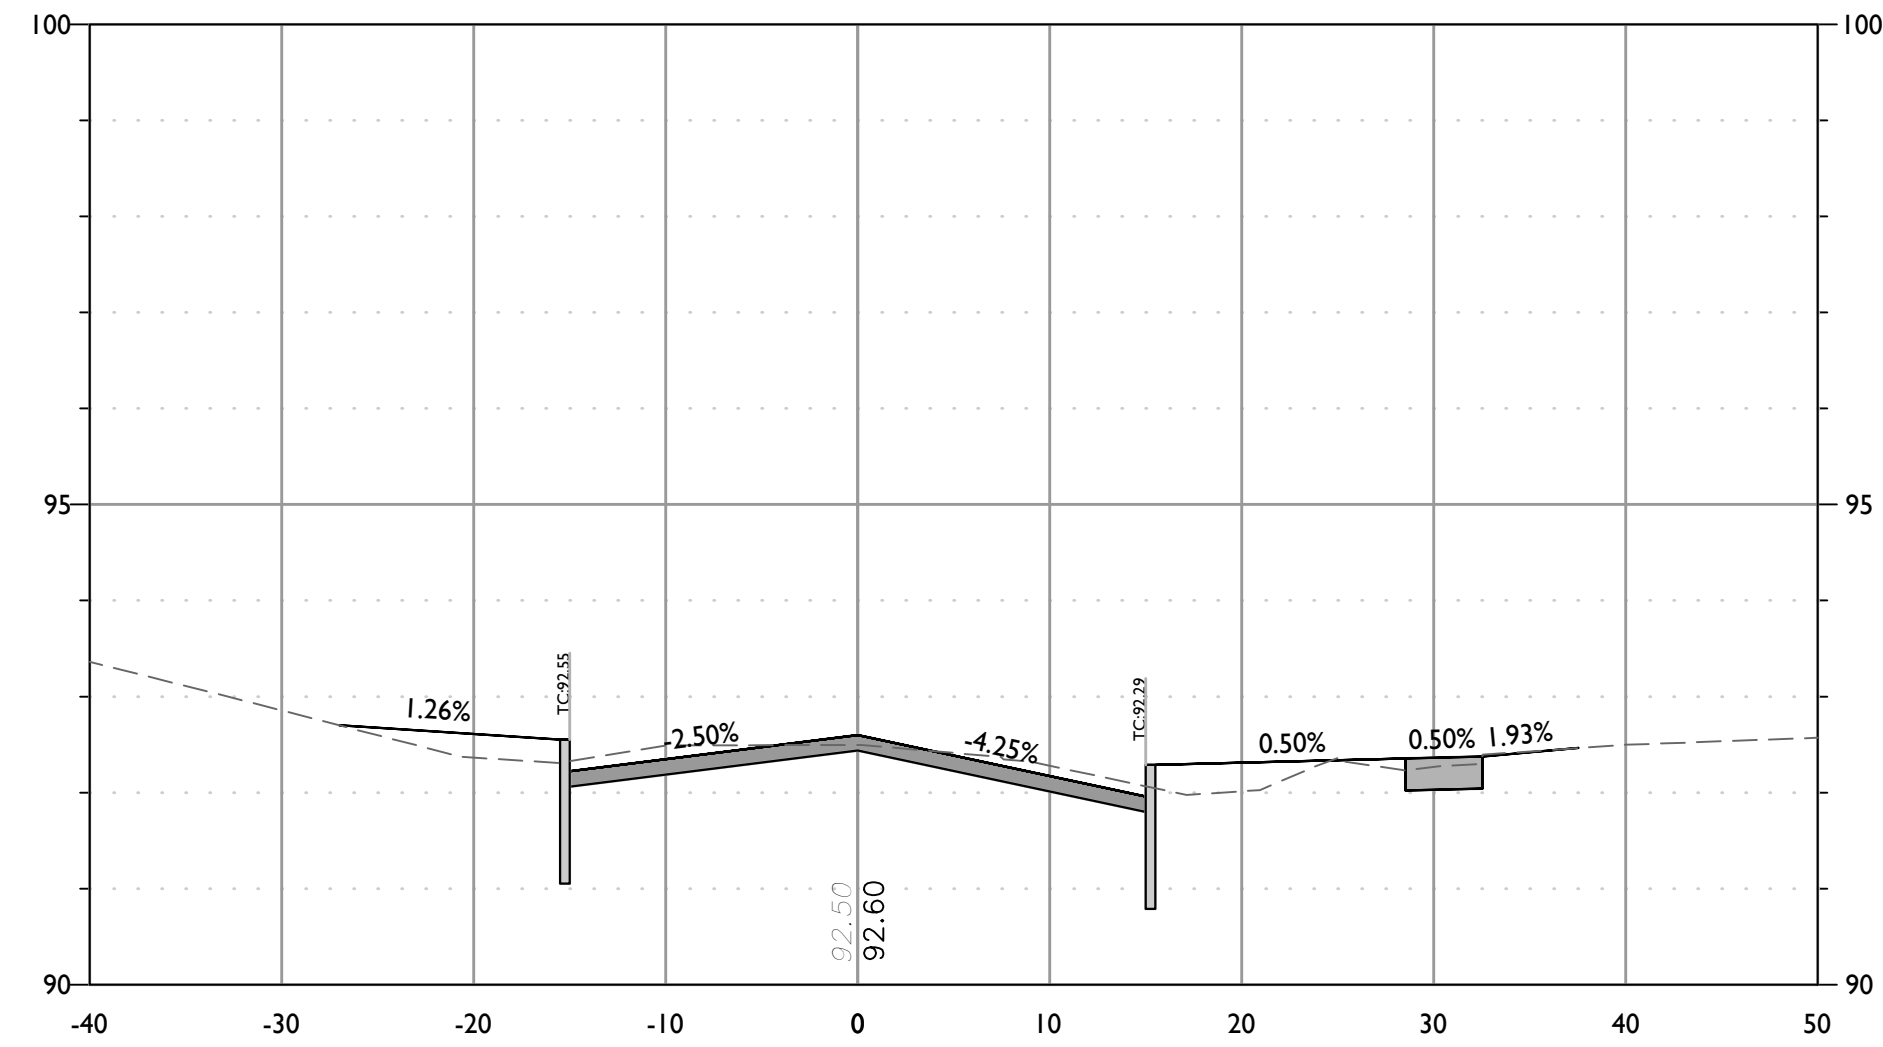


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 2+00  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

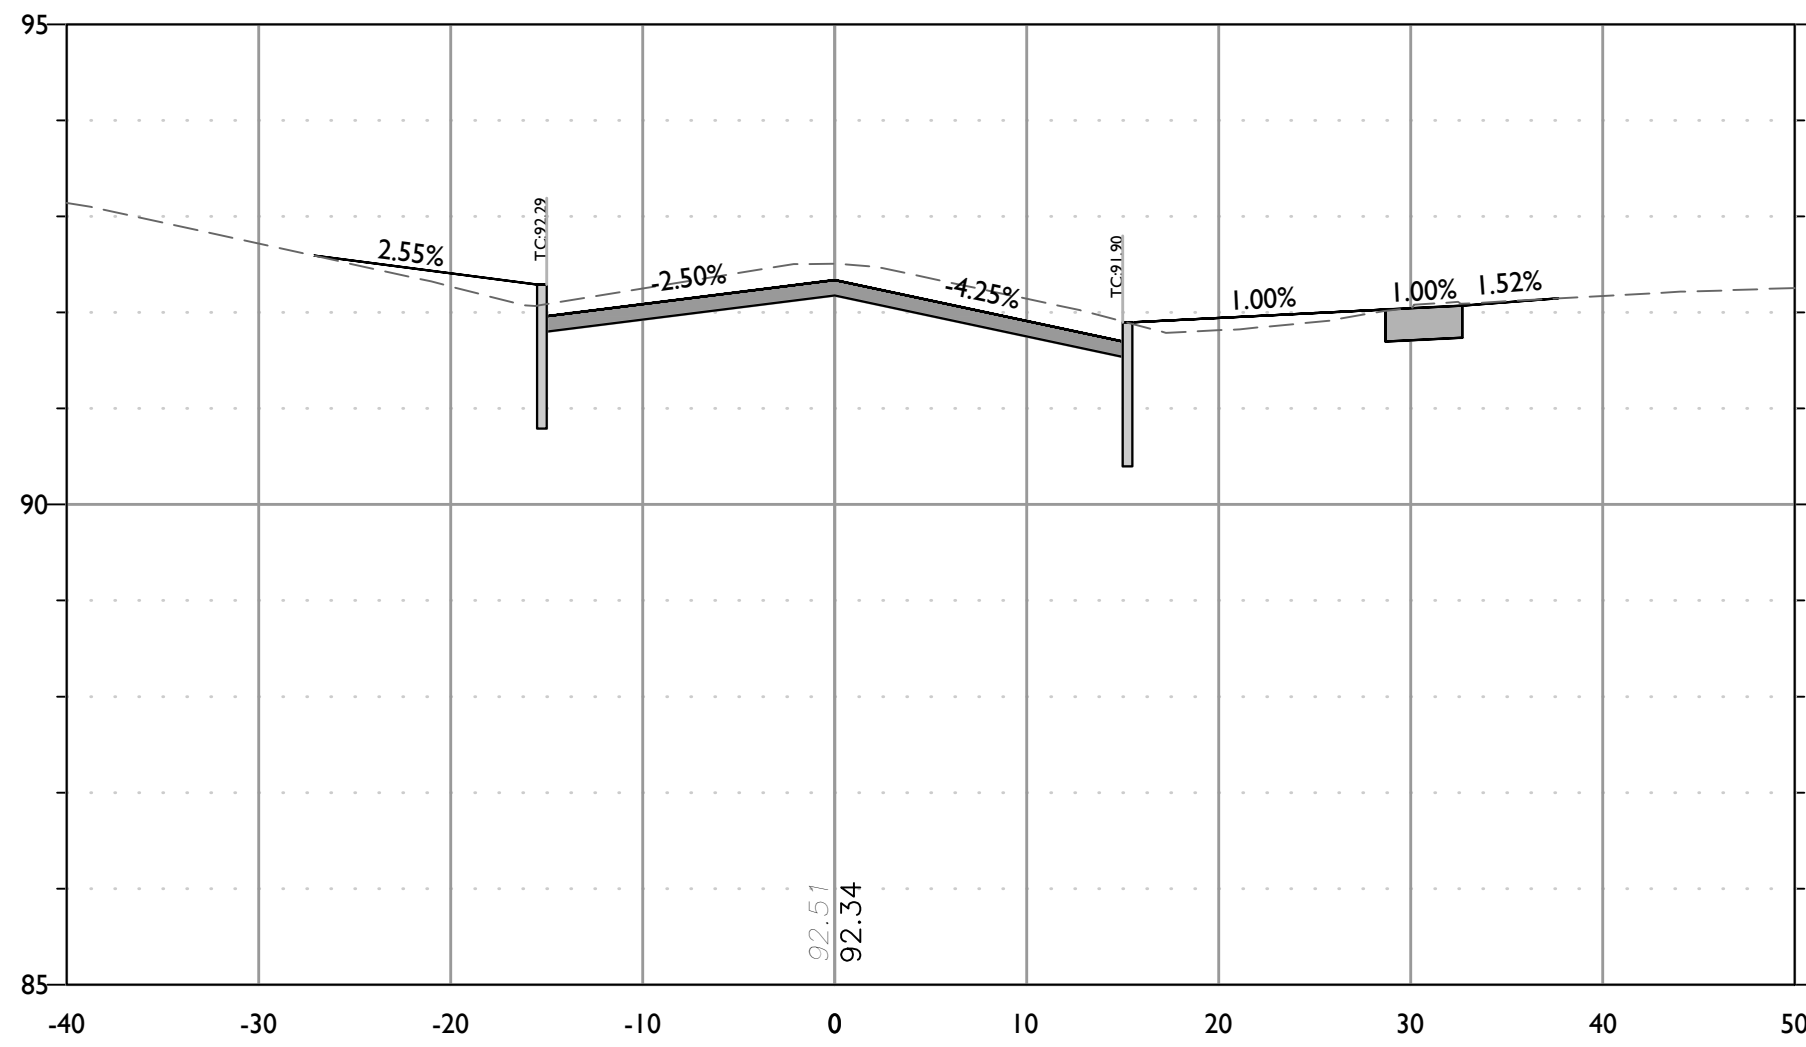

CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 2+40  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

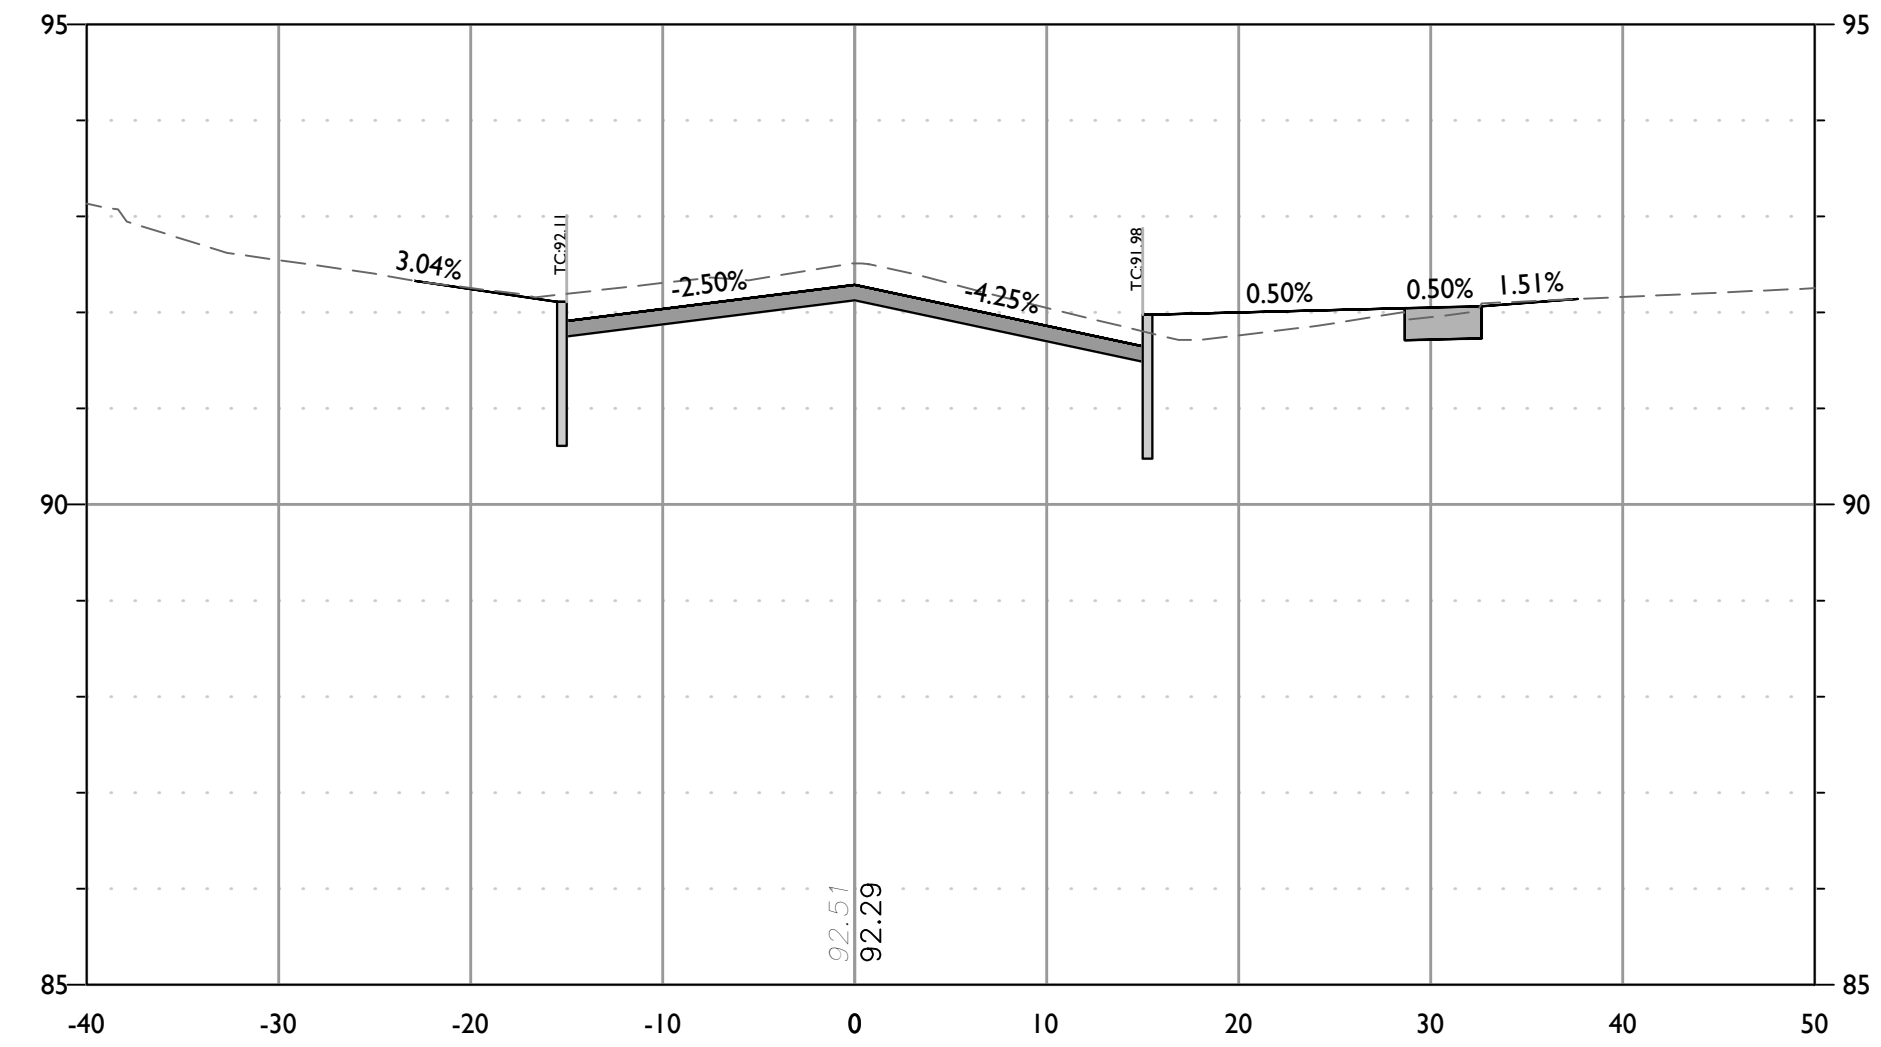

CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 2+50  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

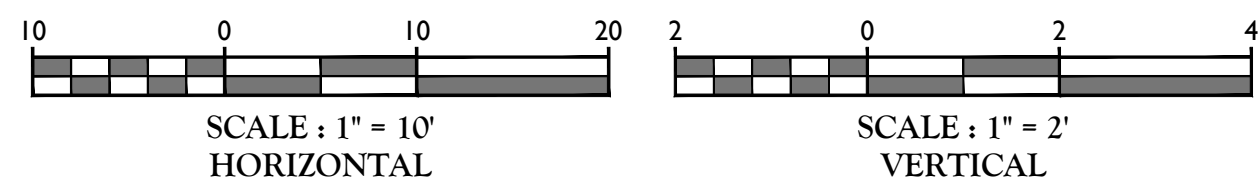

**MASER CONSULTING, P.A.**  
Customer Loyalty through Client Satisfaction  
www.maserconsulting.com  
Office Locations:  
NEW JERSEY NEW MEXICO  
NEW YORK MARYLAND  
PENNSYLVANIA GEORGIA  
VIRGINIA TEXAS  
FLORIDA TENNESSEE  
NORTH CAROLINA COLORADO  
State of NJ, C.O.A.: 24GA27986500  
Copyright © 2021, Maser Consulting, P.A. All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting, P.A.

**811**  
Know what's below.  
Call before you dig.  
FOR STATE SPECIFIC DIRECT PHONE NUMBERS  
VISIT: WWW.CALL811.COM

REV	DATE	DRAWN BY	DESCRIPTION
1	6/8/20	BAK	REVISED PER NJDOT COMMENTS
2	6/15/20	BAK	REVISED PER CURB CHANGES
3	6/17/20	BAK	REVISED FOR SCD SUBMISSION
4	7/7/20	BAK	REVISED PER SCD COMMENTS
5	3/5/21	BAK	REVISED PER TOWNSHIP COMMENTS
6	4/2/21	BAK	REVISED PER NJDOT COMMENTS

*Carl P. O'Brien*  
**CARL P. O'BRIEN**  
NEW JERSEY PROFESSIONAL  
ENGINEER - LICENSE NUMBER: GE45154


CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS  
TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY

**M.T. ARLINGTON OFFICE**  
400 Valley Road  
Suite 304  
Mount Arlington, NJ 07856  
Phone: 973.398.3110  
Fax: 973.398.3199


SCALE:	DATE:	DRAWN BY:	CHECKED BY:
AS SHOWN	1/30/20	BAK	PWJ
PROJECT NUMBER:	DRAWING NAME:	CDT065	CLAYT

CROSS SECTIONS  
SHEET NUMBER:  
10 of 36




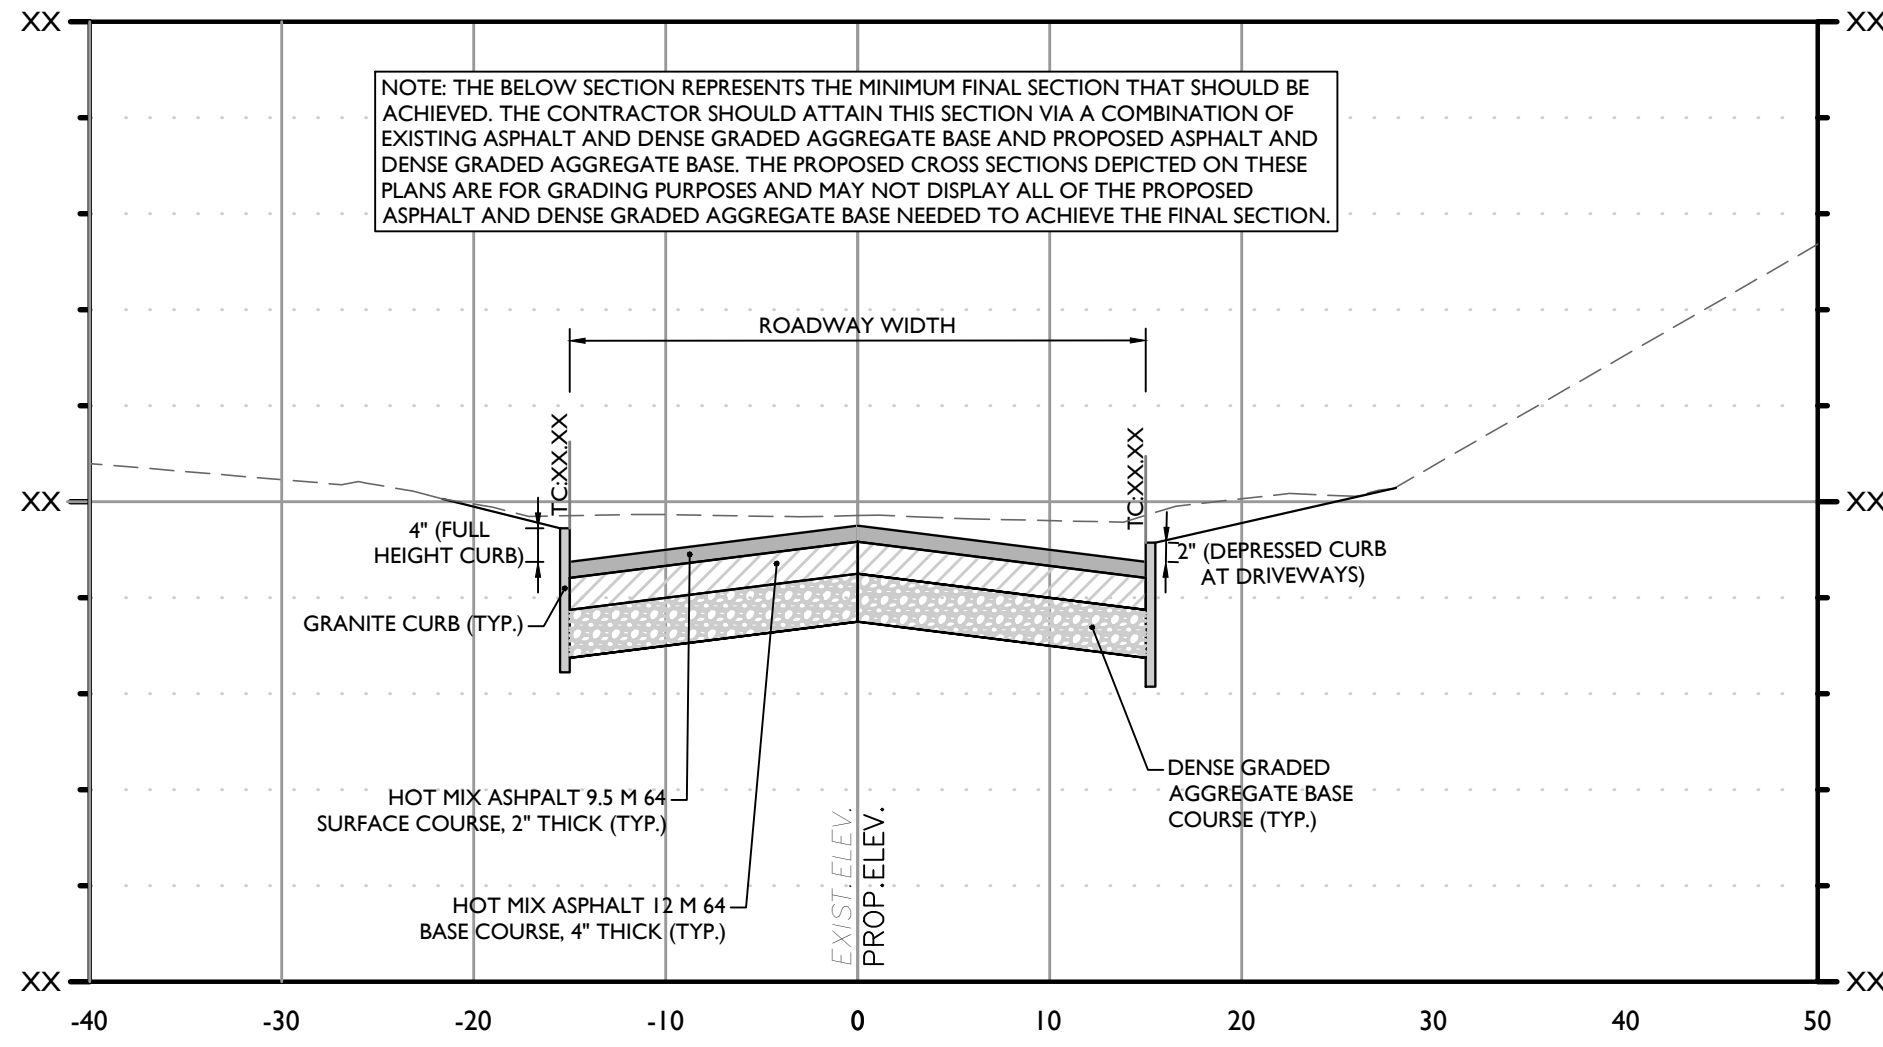


TYPICAL CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: XX+XX.XX  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

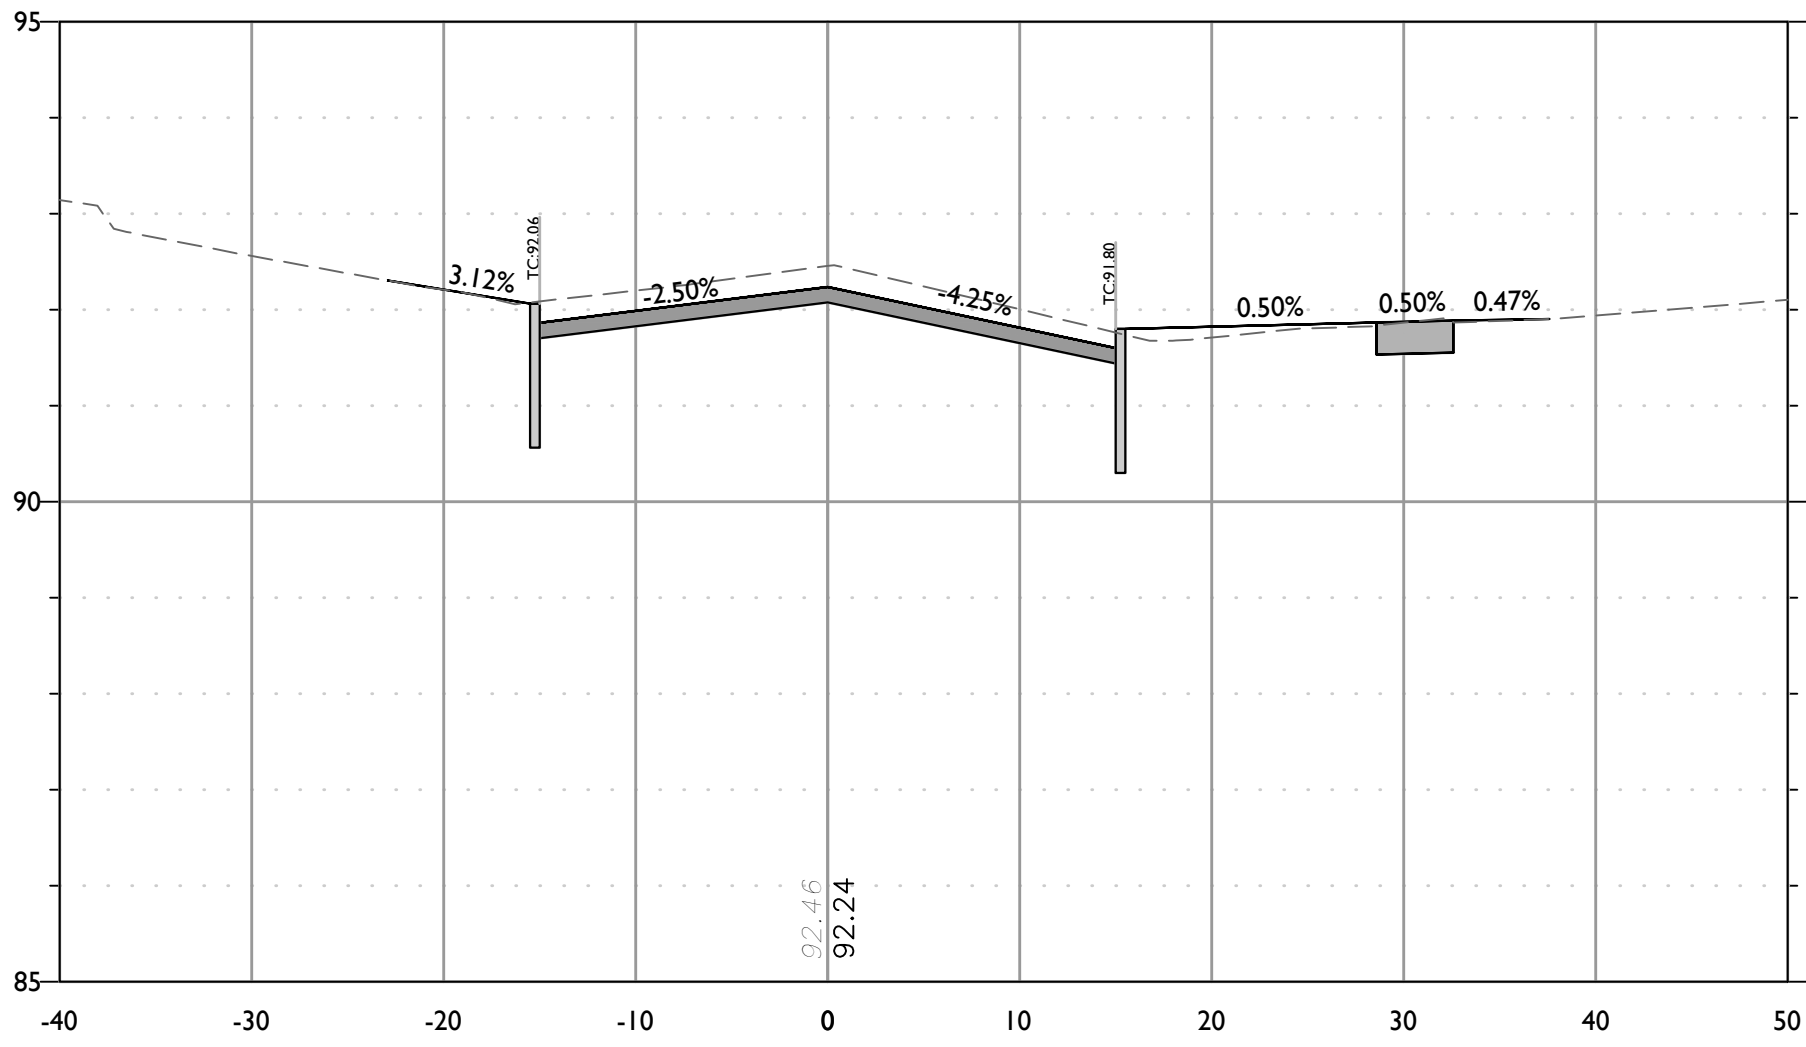


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 2+60  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

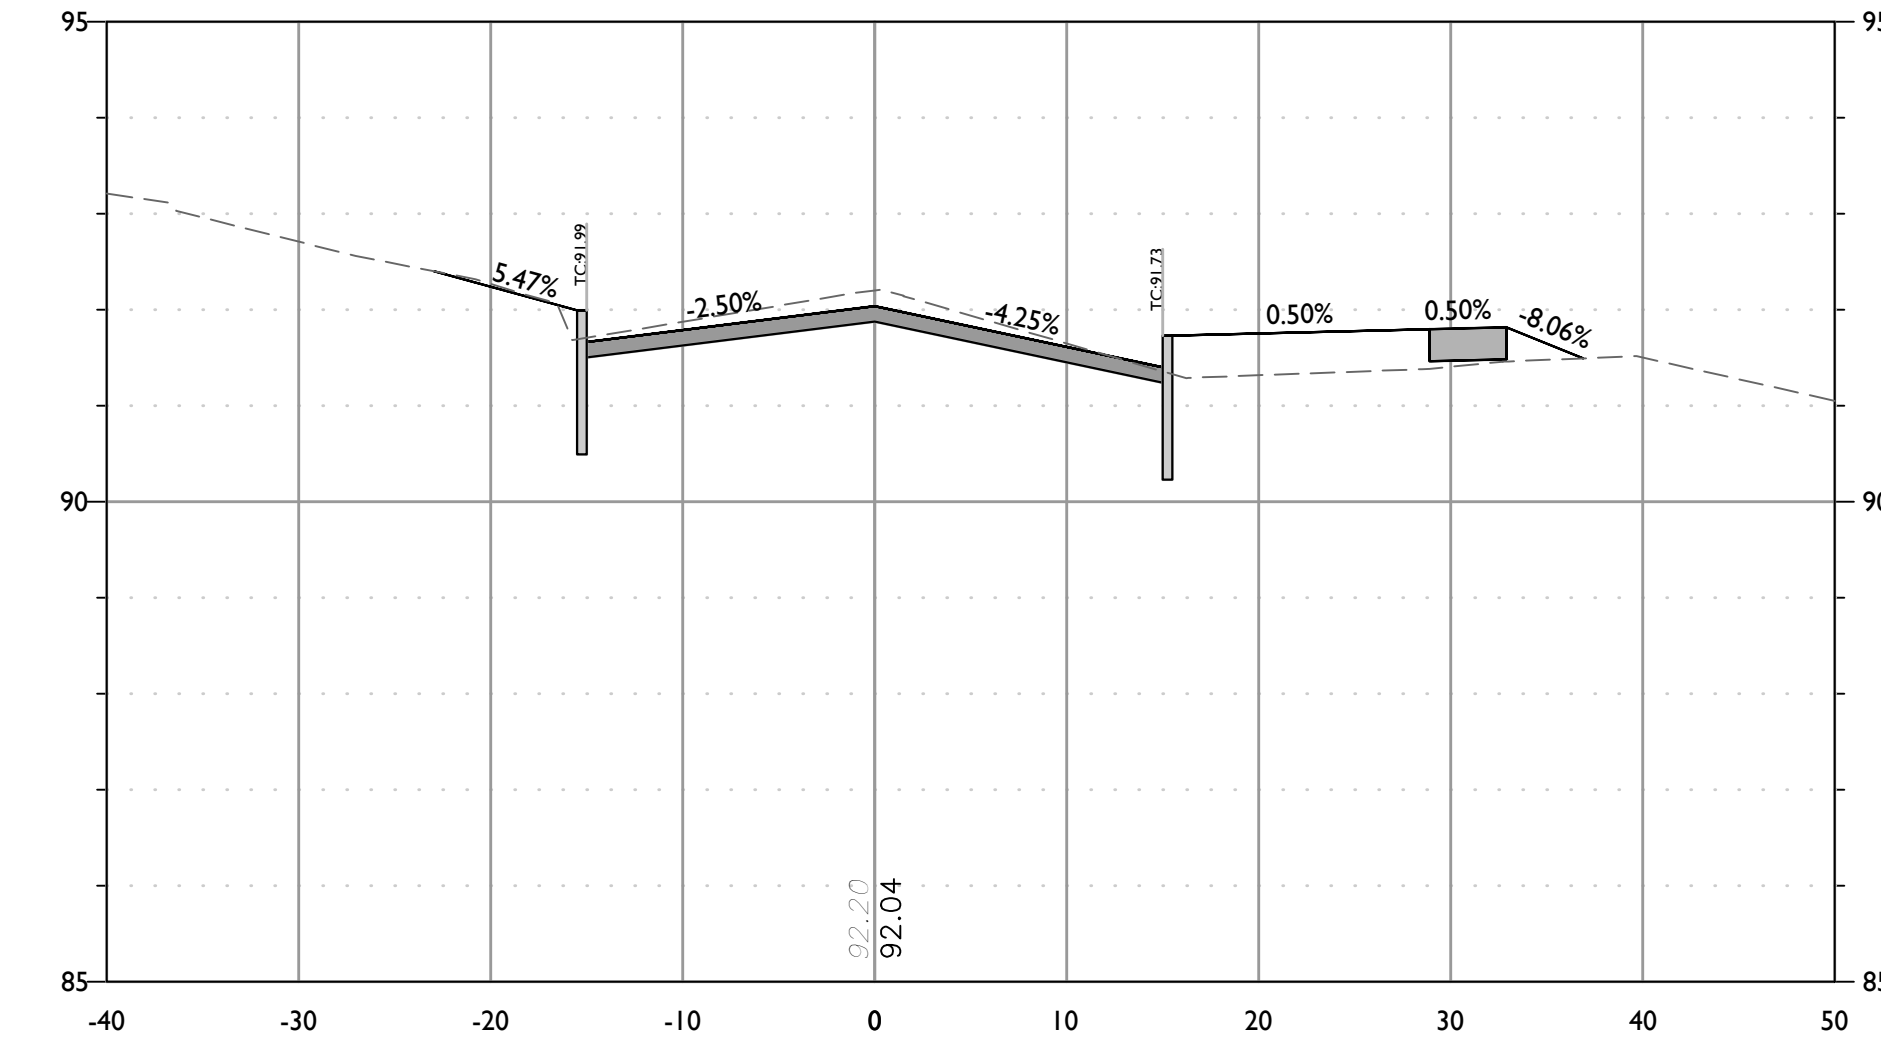


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 3+00  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

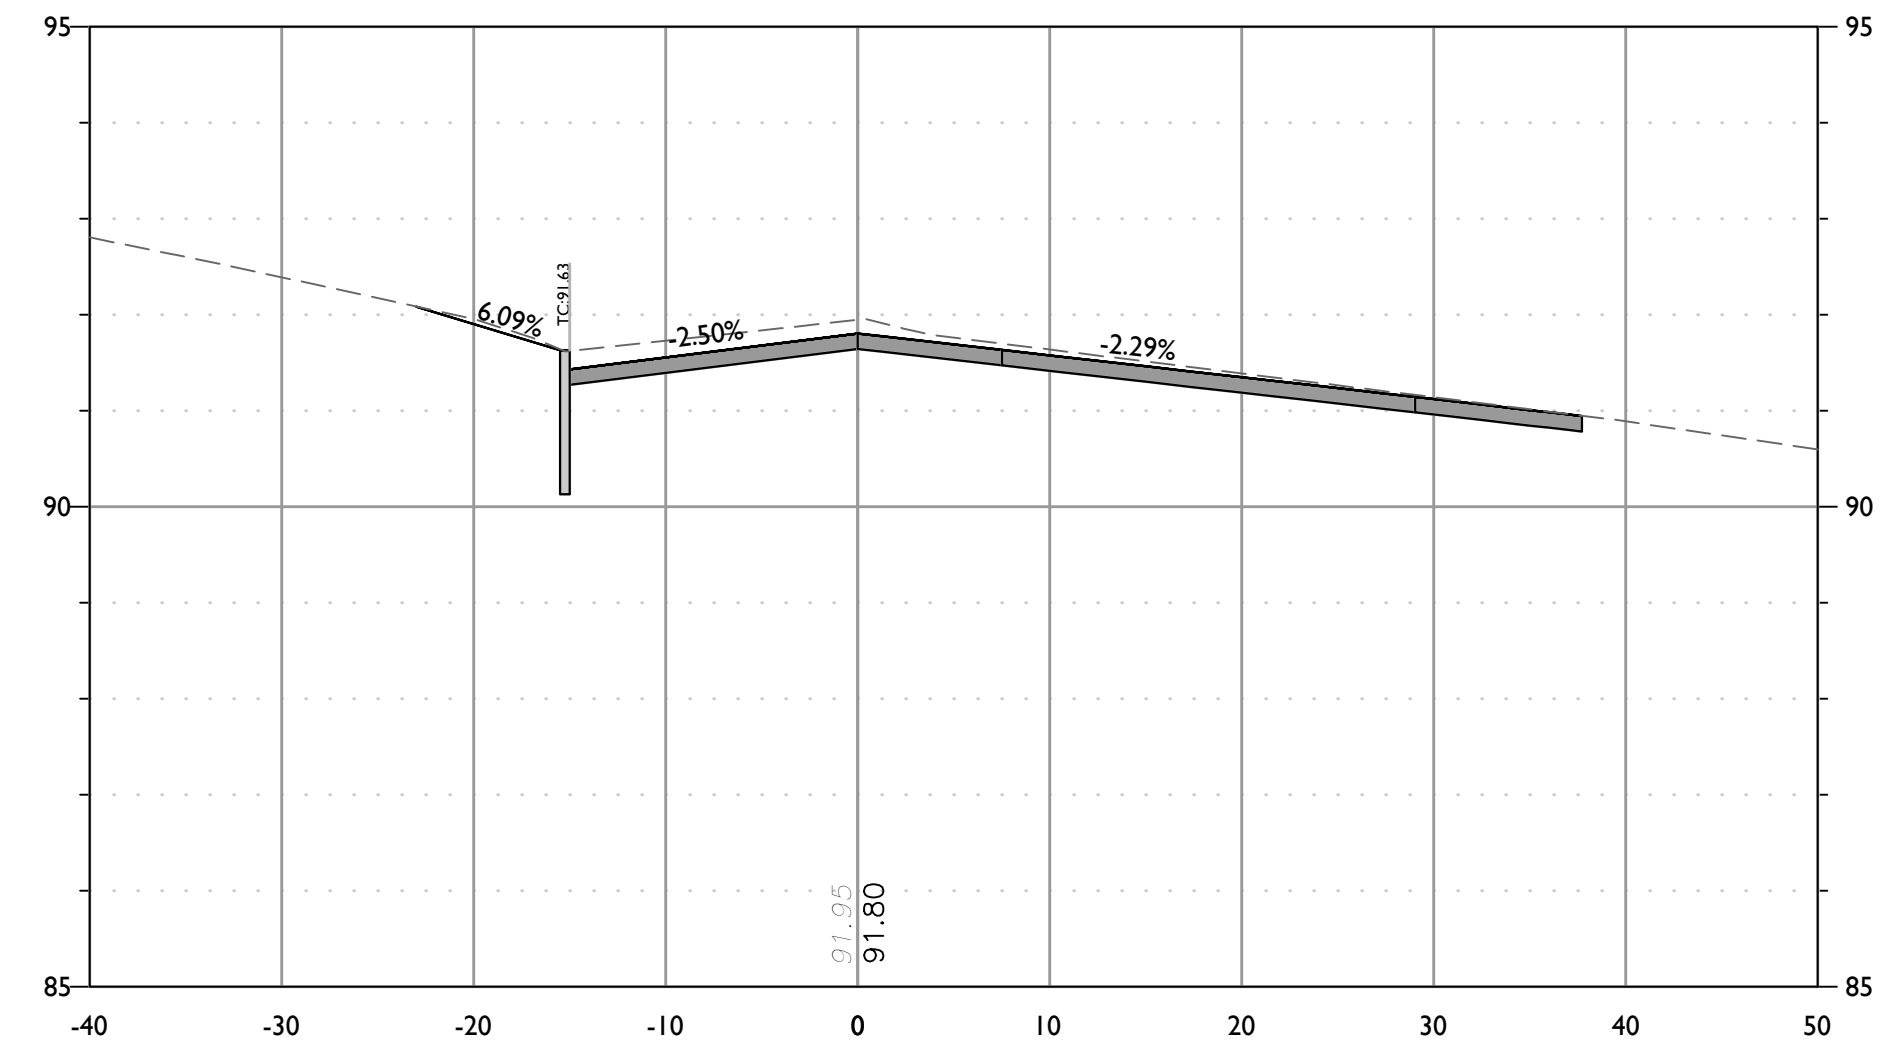


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 3+36.07  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

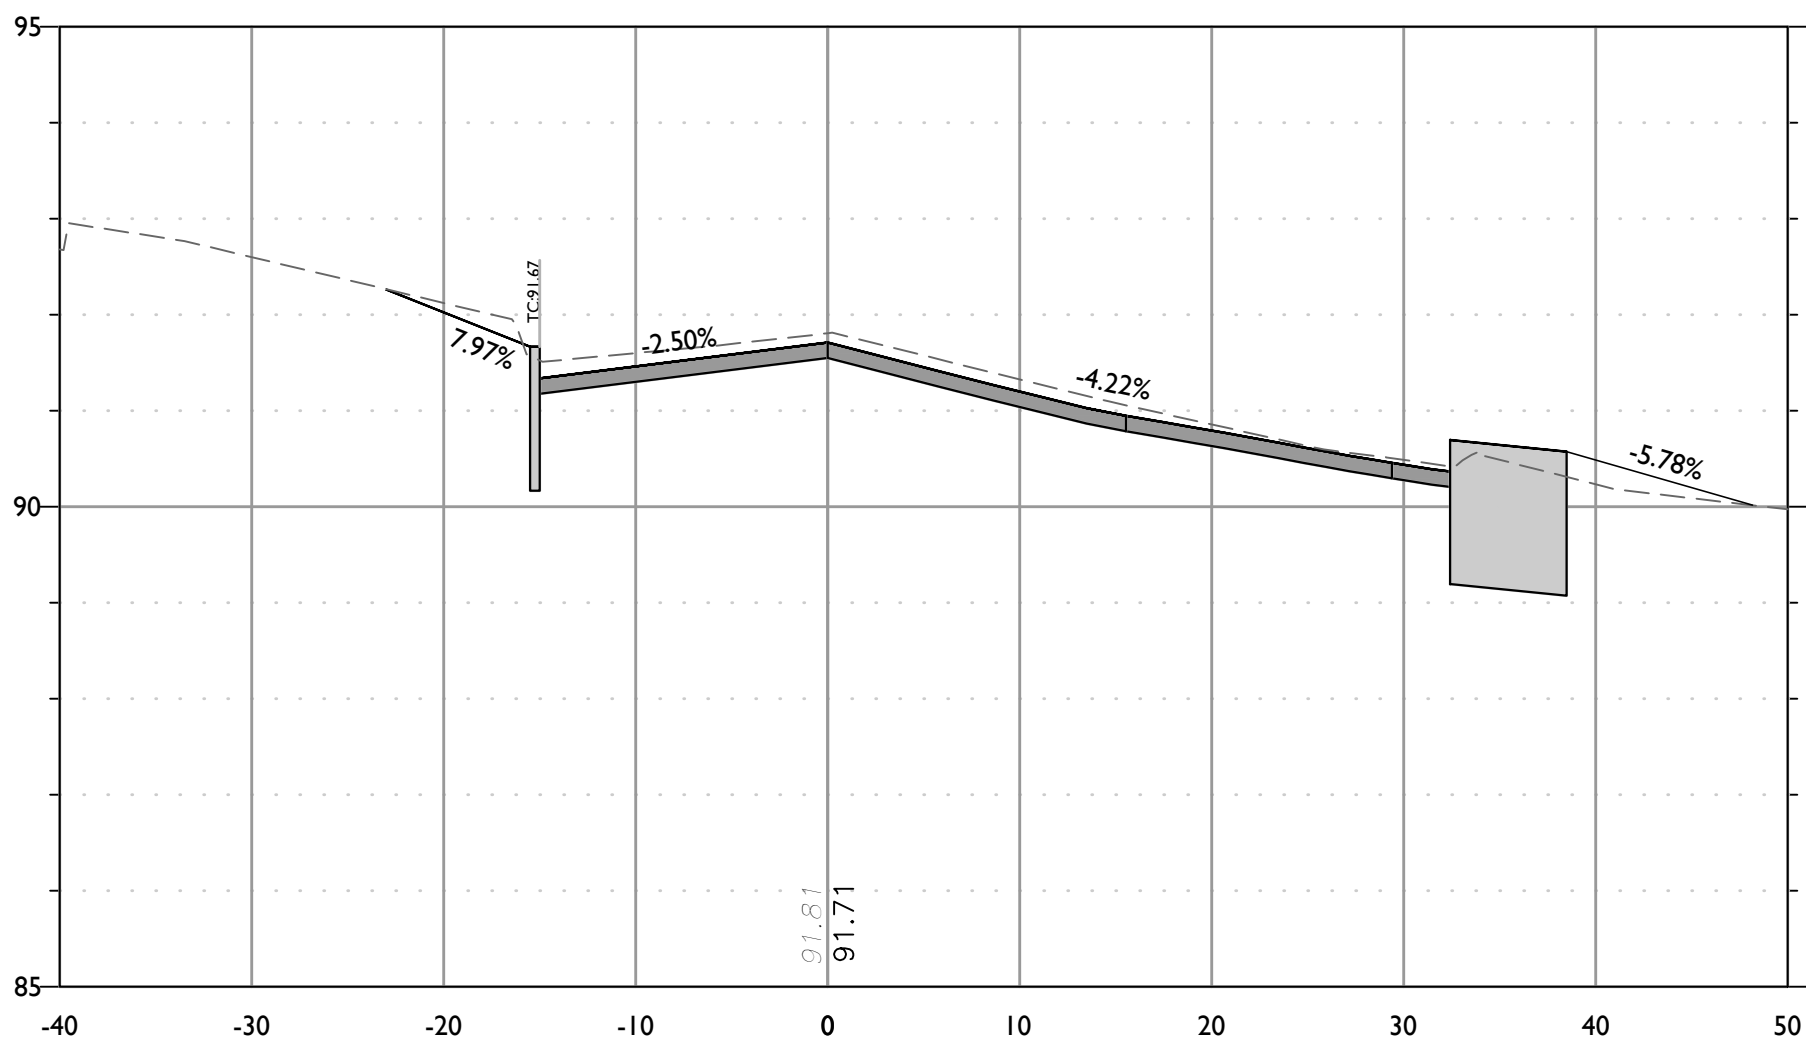


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 3+50  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

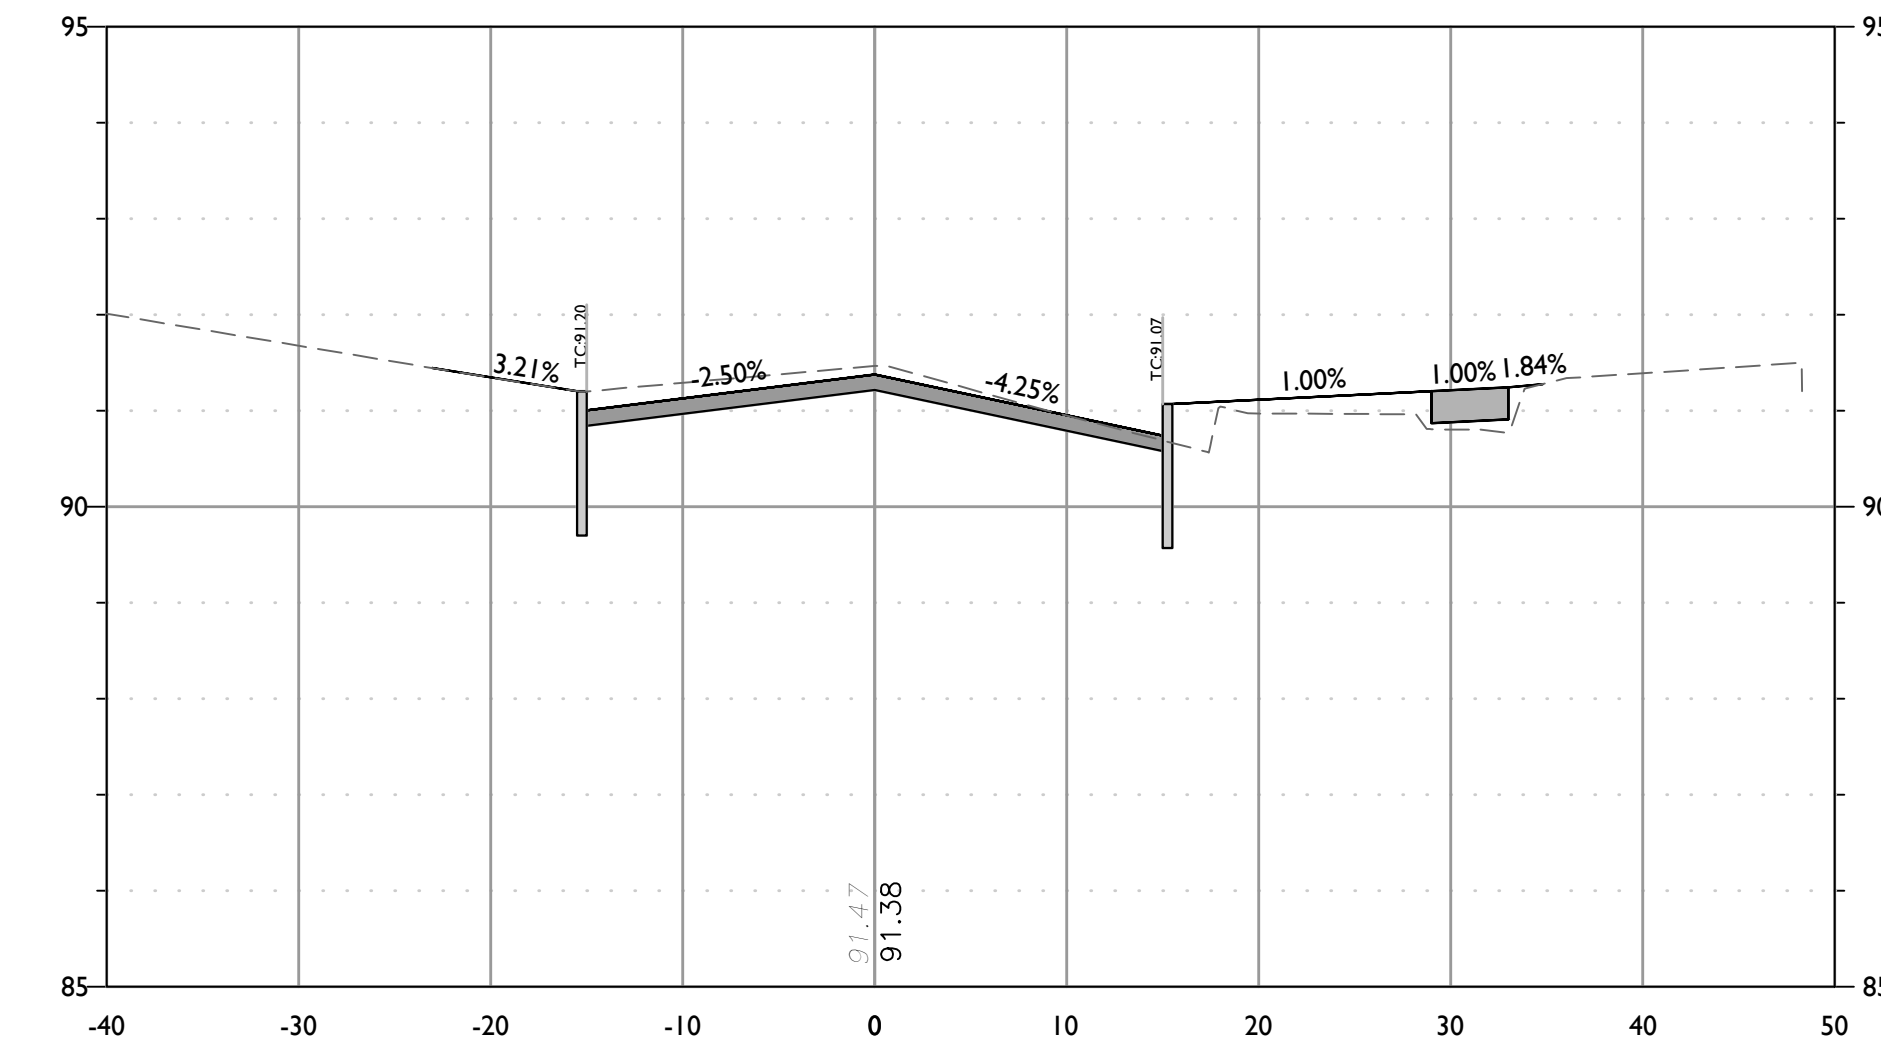


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 4+00  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

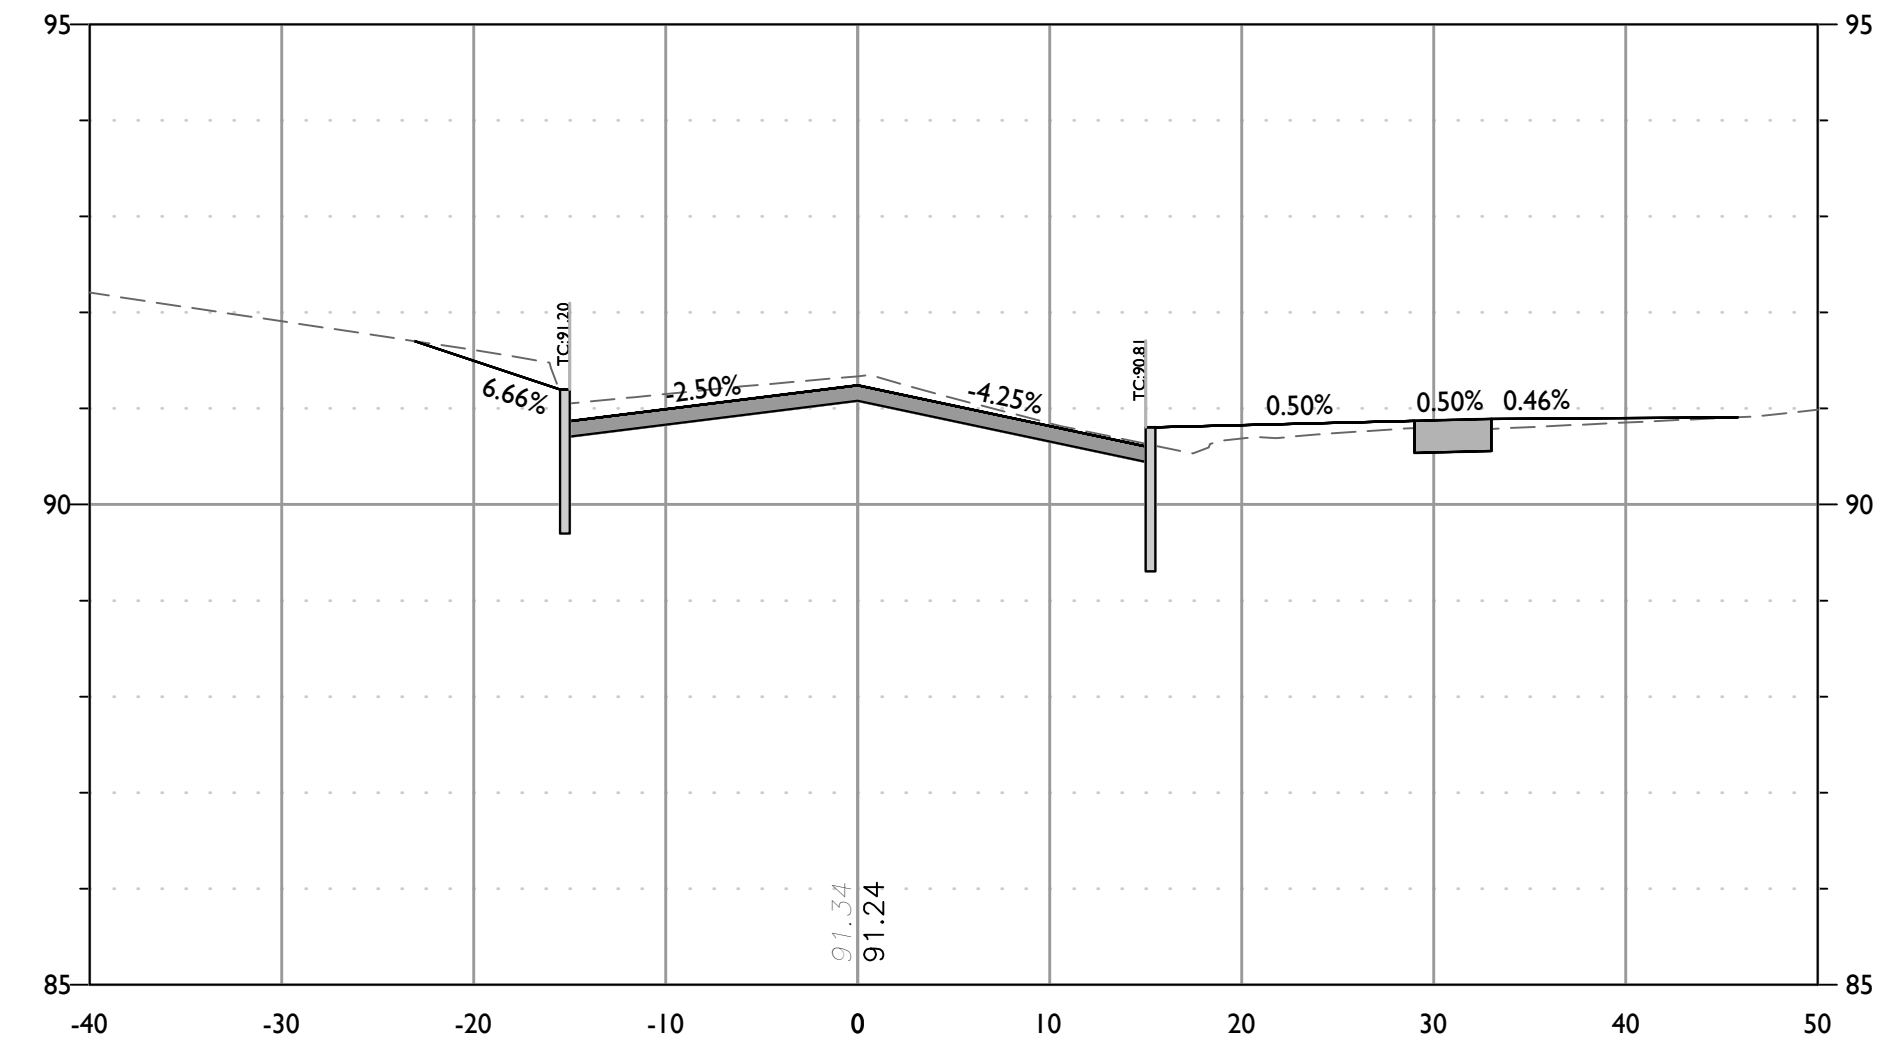


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 4+20  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

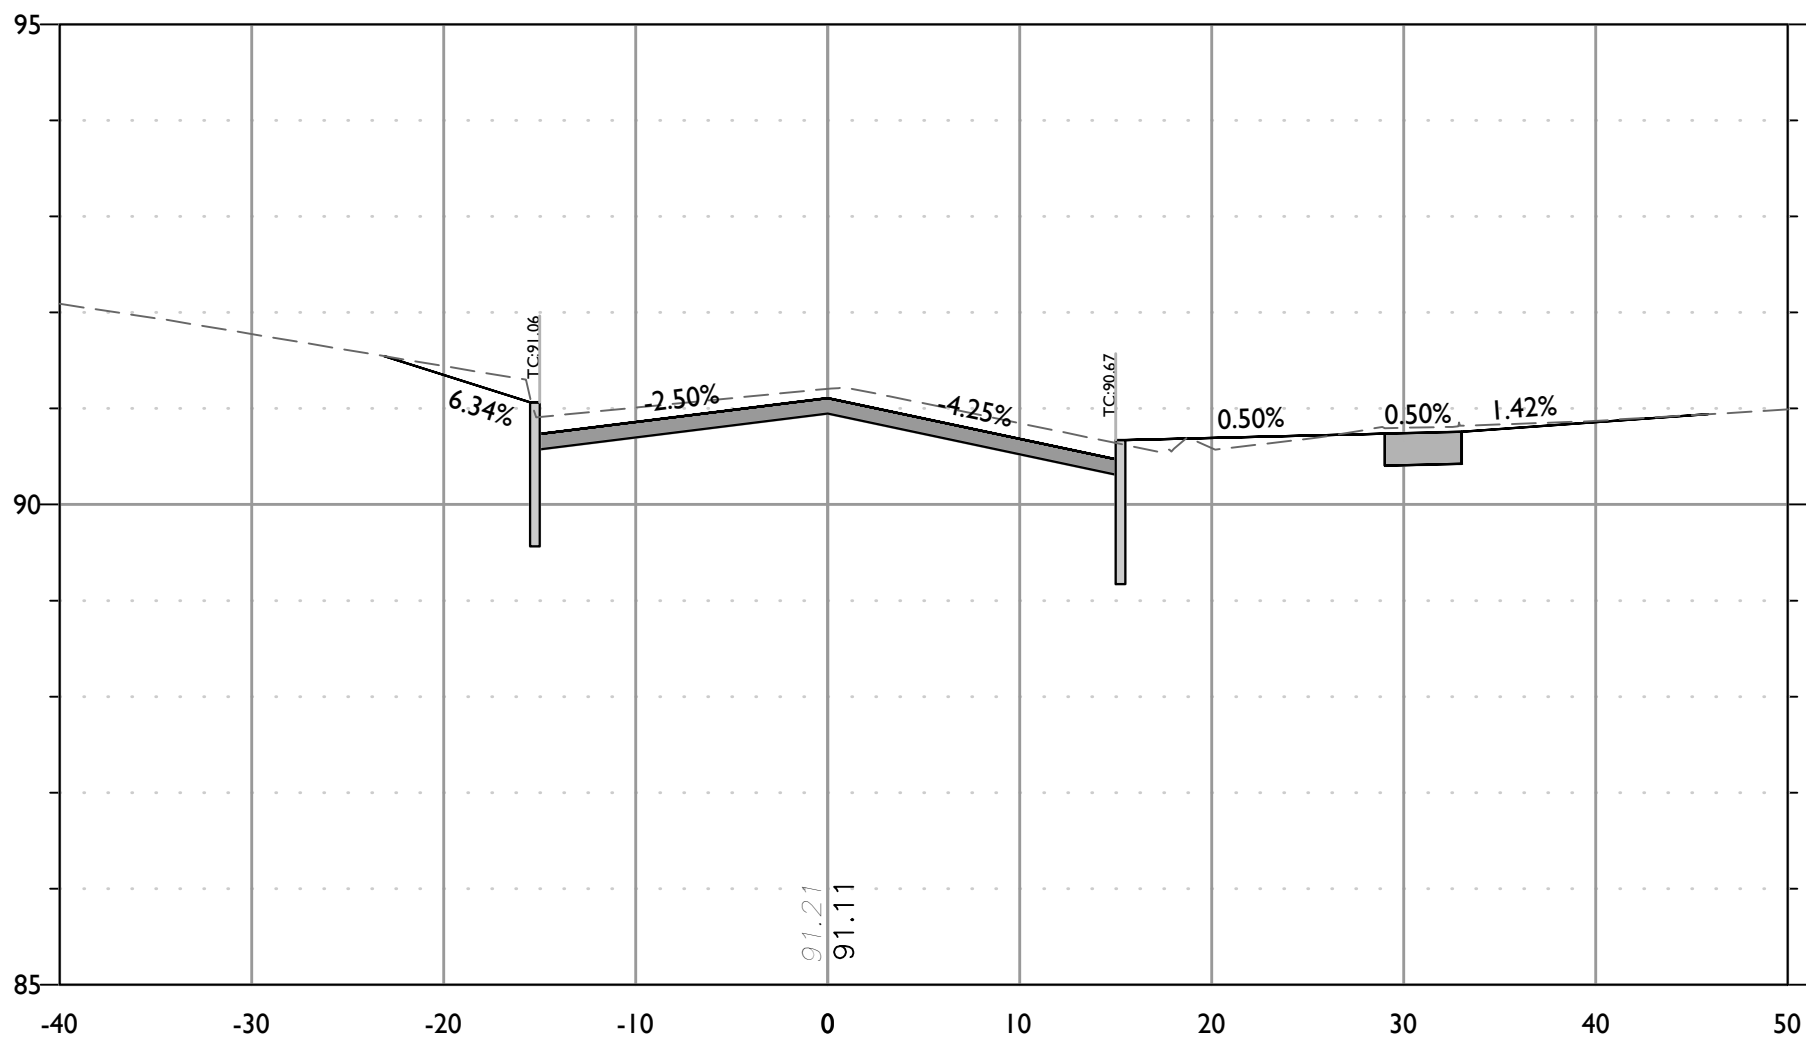

CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 4+40  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

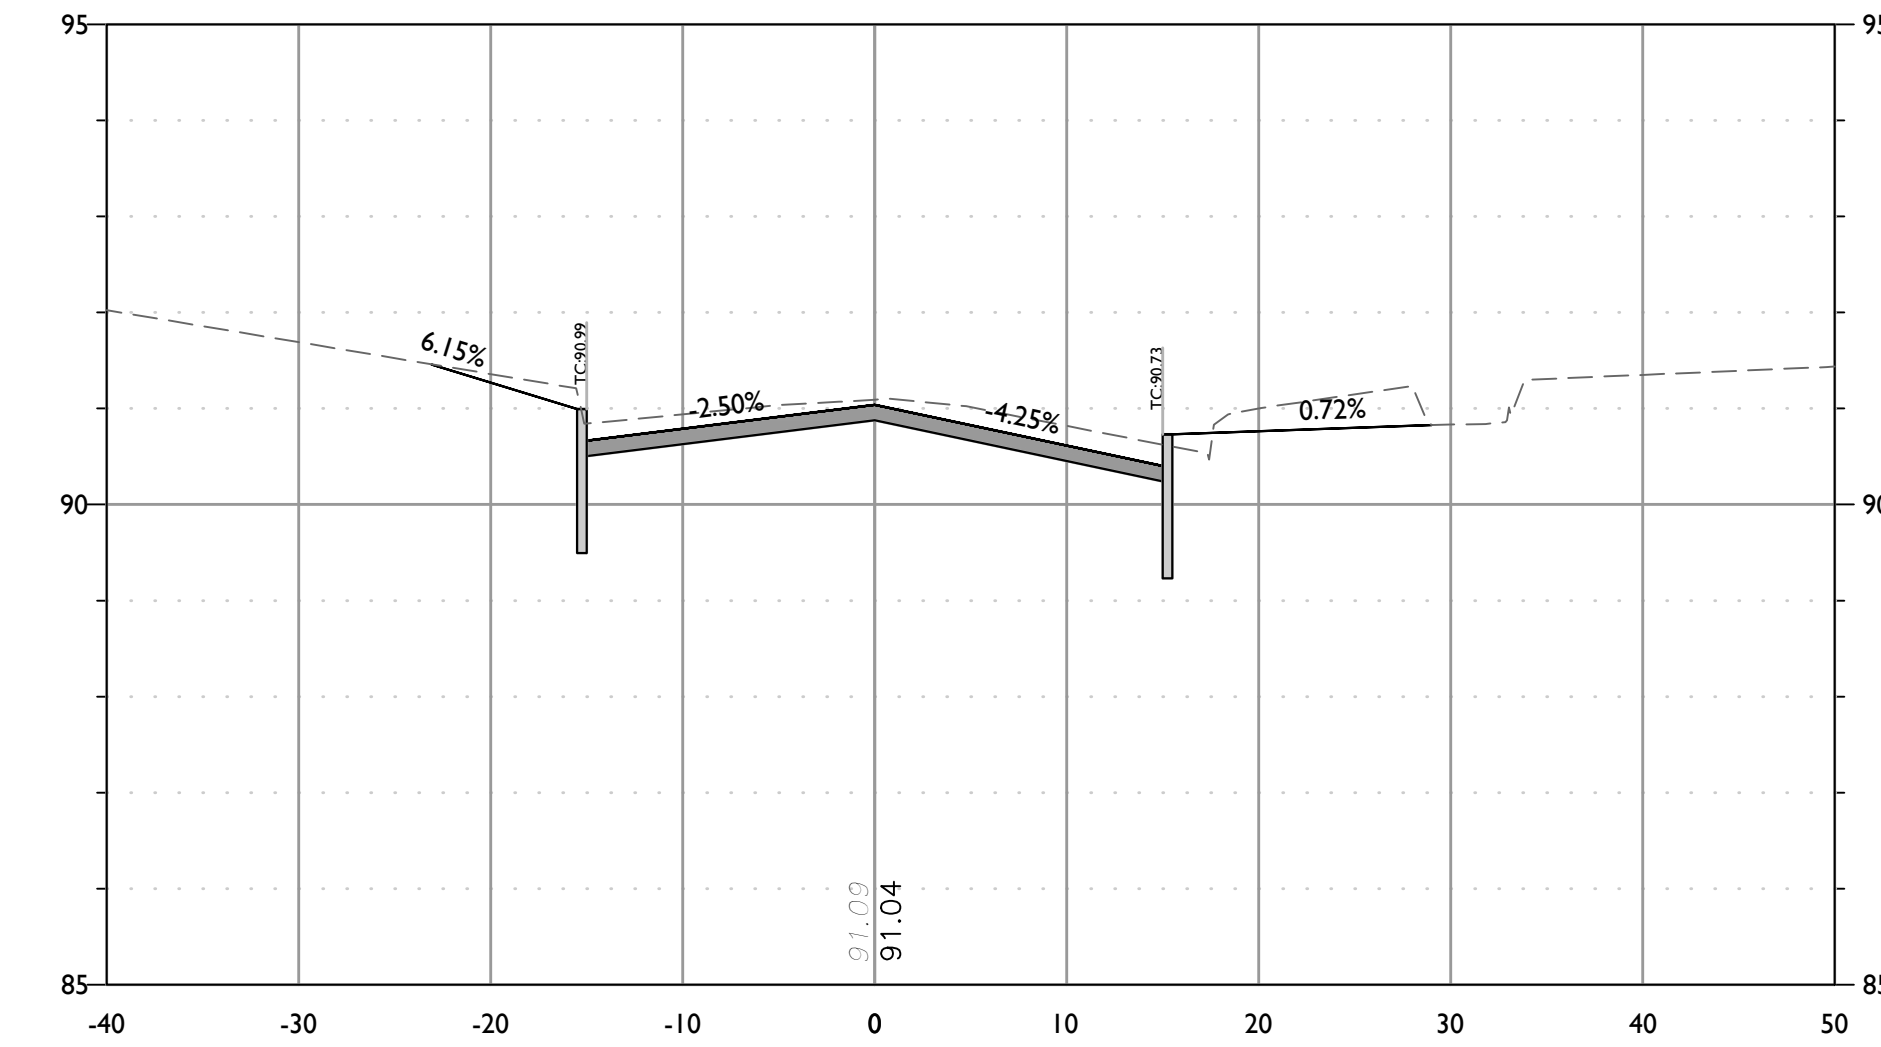

CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 4+50  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

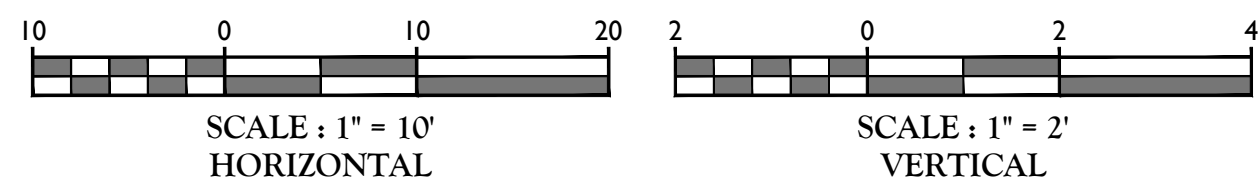

**MASER CONSULTING, P.A.**  
Customer Loyalty through Client Satisfaction  
www.maserconsulting.com  
Office Locations:  
NEW JERSEY NEW MEXICO  
NEW YORK MARYLAND  
PENNSYLVANIA GEORGIA  
VIRGINIA TEXAS  
FLORIDA TENNESSEE  
NORTH CAROLINA COLORADO  
State of NJ, C.O.A.: 24GA2796500  
Copyright © 2021, Maser Consulting, All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting, P.A.

**811**  
Know what's below.  
Call before you dig.  
FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM

REV	DATE	DRAWN BY	DESCRIPTION
1	6/8/20	BAK	REVISED PER NJDOT COMMENTS
2	6/15/20	BAK	REVISED PER CURB CHANGES
3	6/17/20	BAK	REVISED FOR SCD SUBMISSION
4	7/7/20	BAK	REVISED PER SCD COMMENTS
5	3/5/21	BAK	REVISED PER TOWNSHIP COMMENTS
6	4/2/21	BAK	REVISED PER NJDOT COMMENTS

**Carl P. O'Brien**  
CARL P. O'BRIEN  
NEW JERSEY PROFESSIONAL  
ENGINEER - LICENSE NUMBER: GE45154


CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS  
TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY

**Mt. Arlington Office**  
400 Valley Road  
Suite 304  
Mount Arlington, NJ 07856  
Phone: 973.398.3110  
Fax: 973.398.3199


SCALE:	DATE:	DRAWN BY:	CHECKED BY:
AS SHOWN	1/30/20	BAK	PWJ
PROJECT NUMBER:	CDT065	DRAWING NAME:	CLAYT

CROSS SECTIONS  
SHEET NUMBER:  
11 of 36




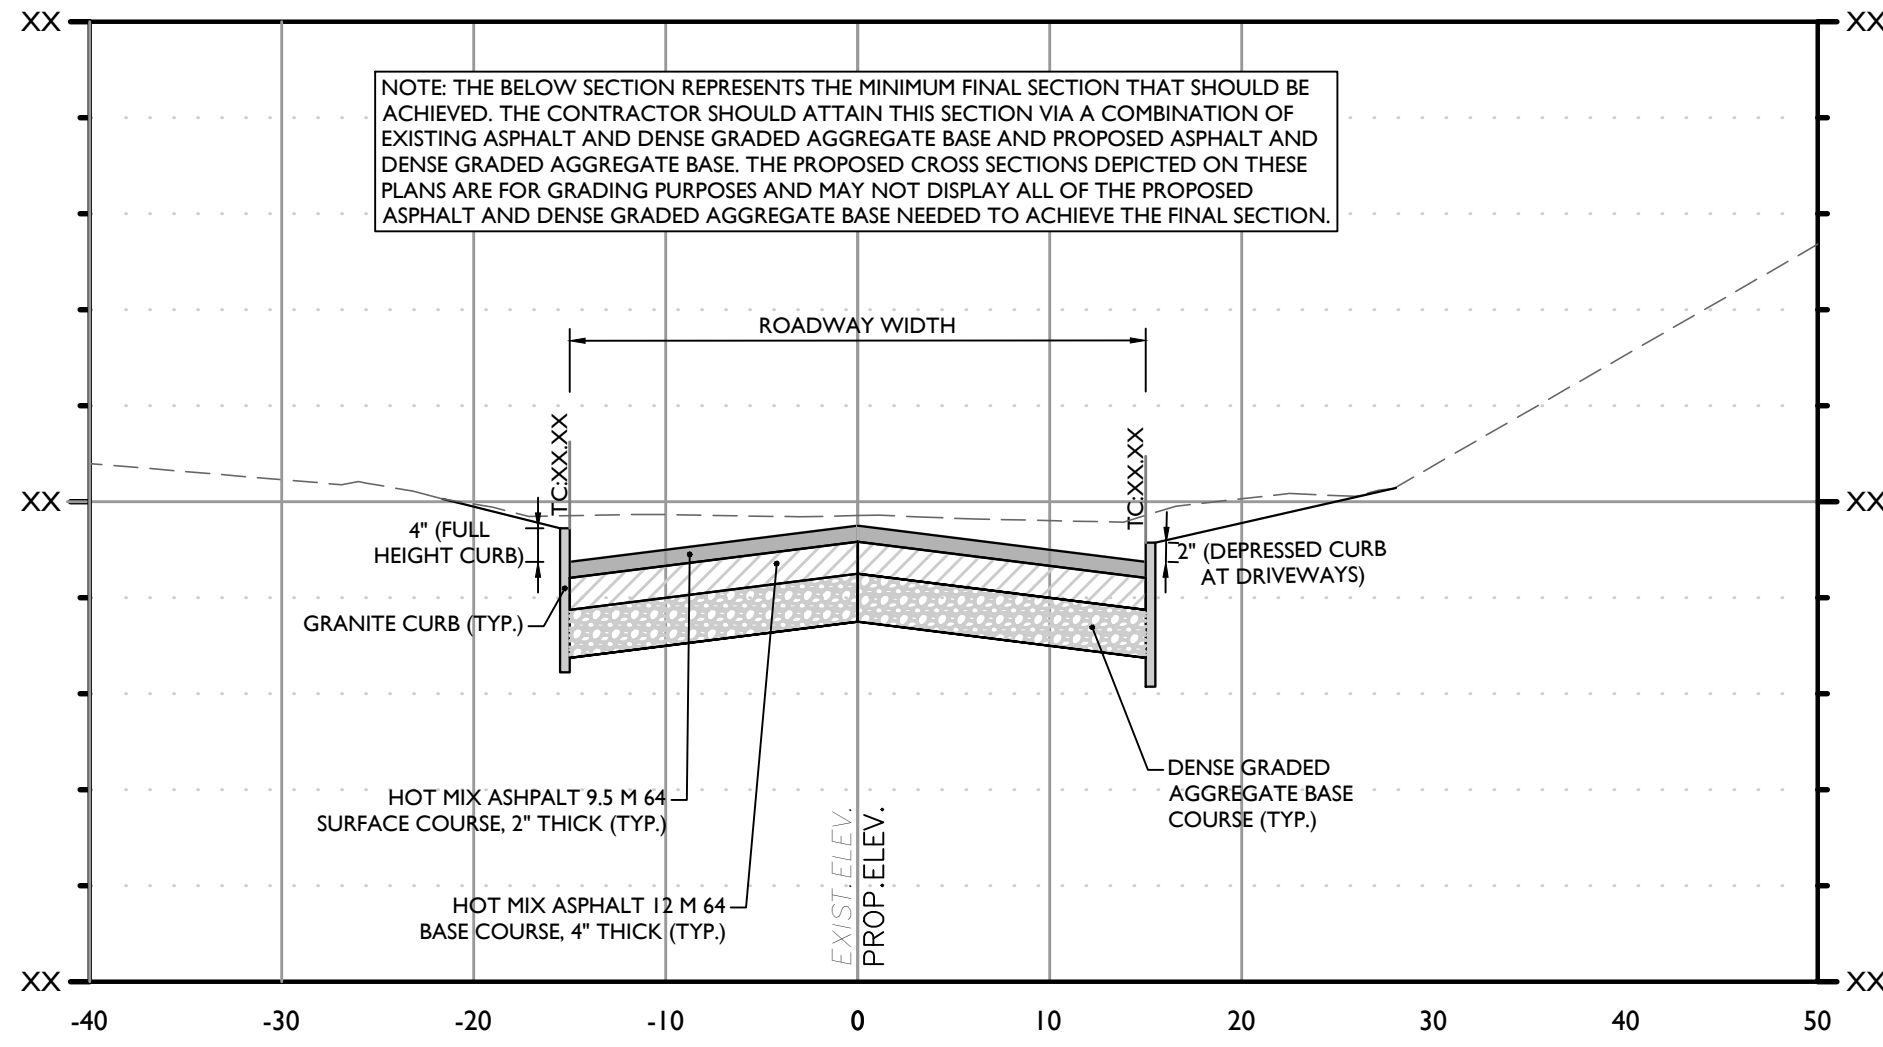


TYPICAL CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: XX+XX.XX  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

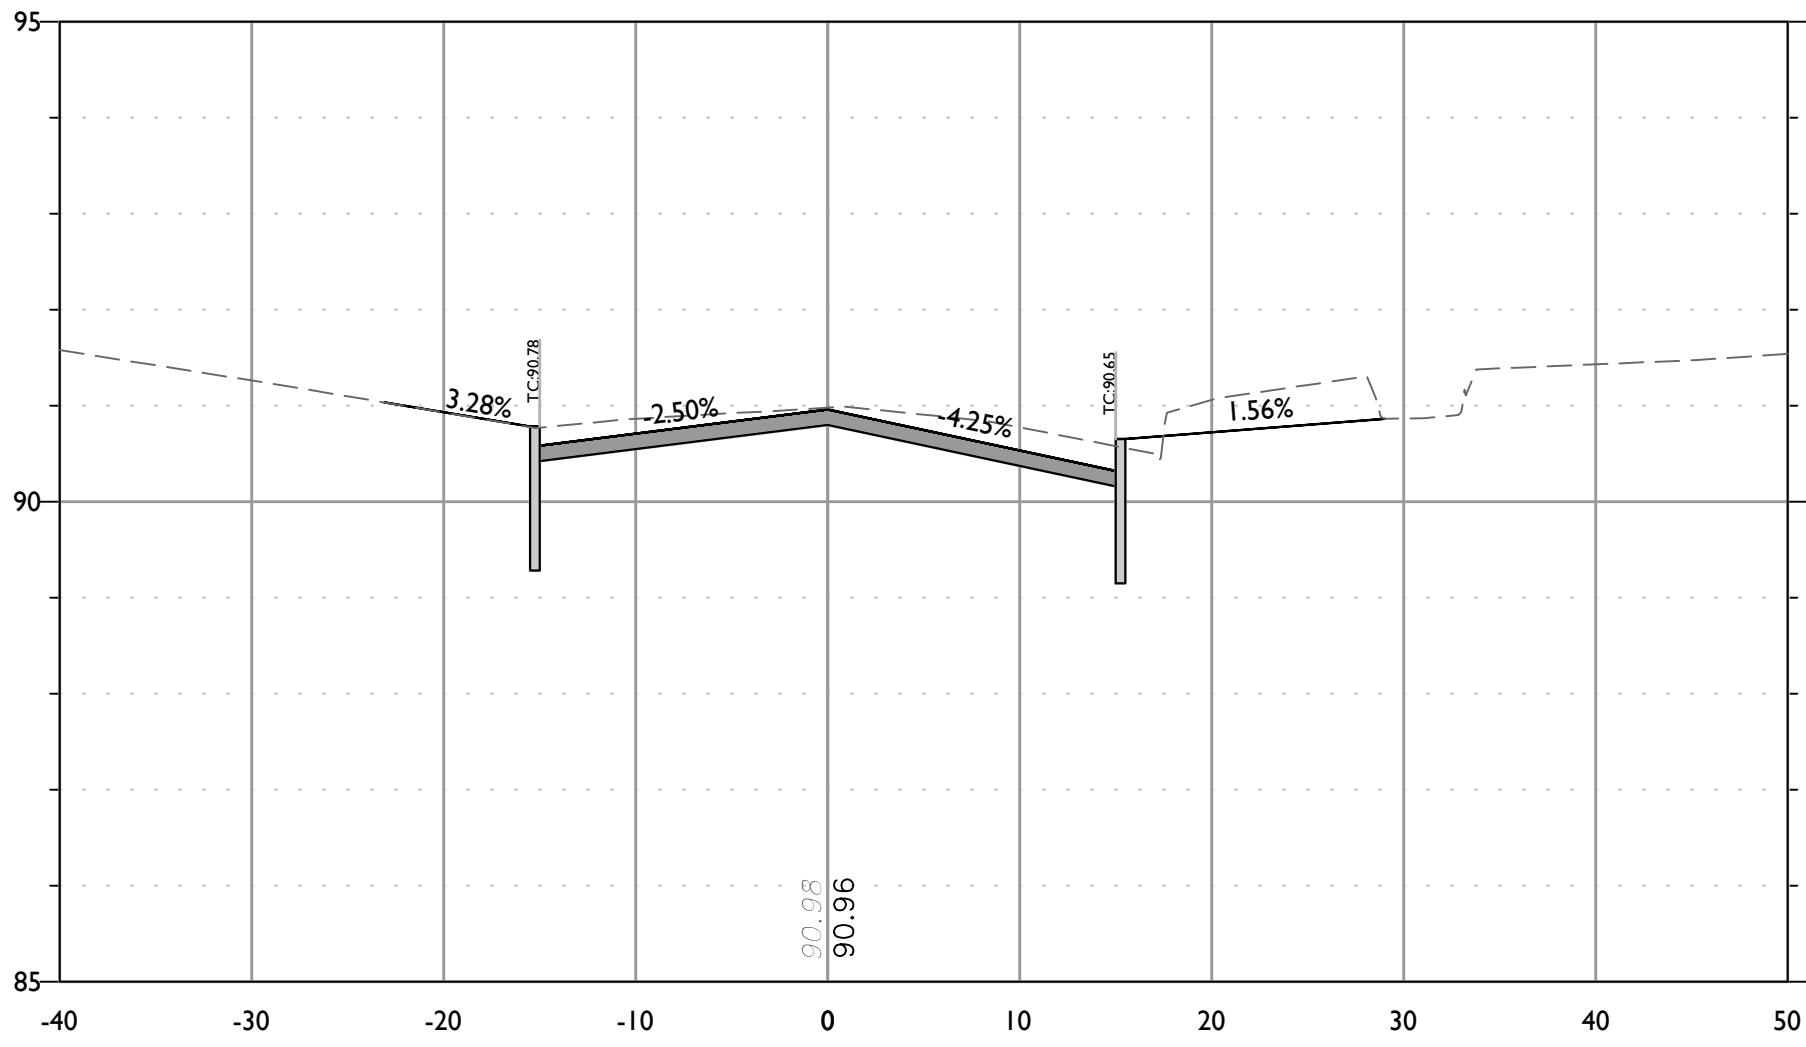


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 4+60  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

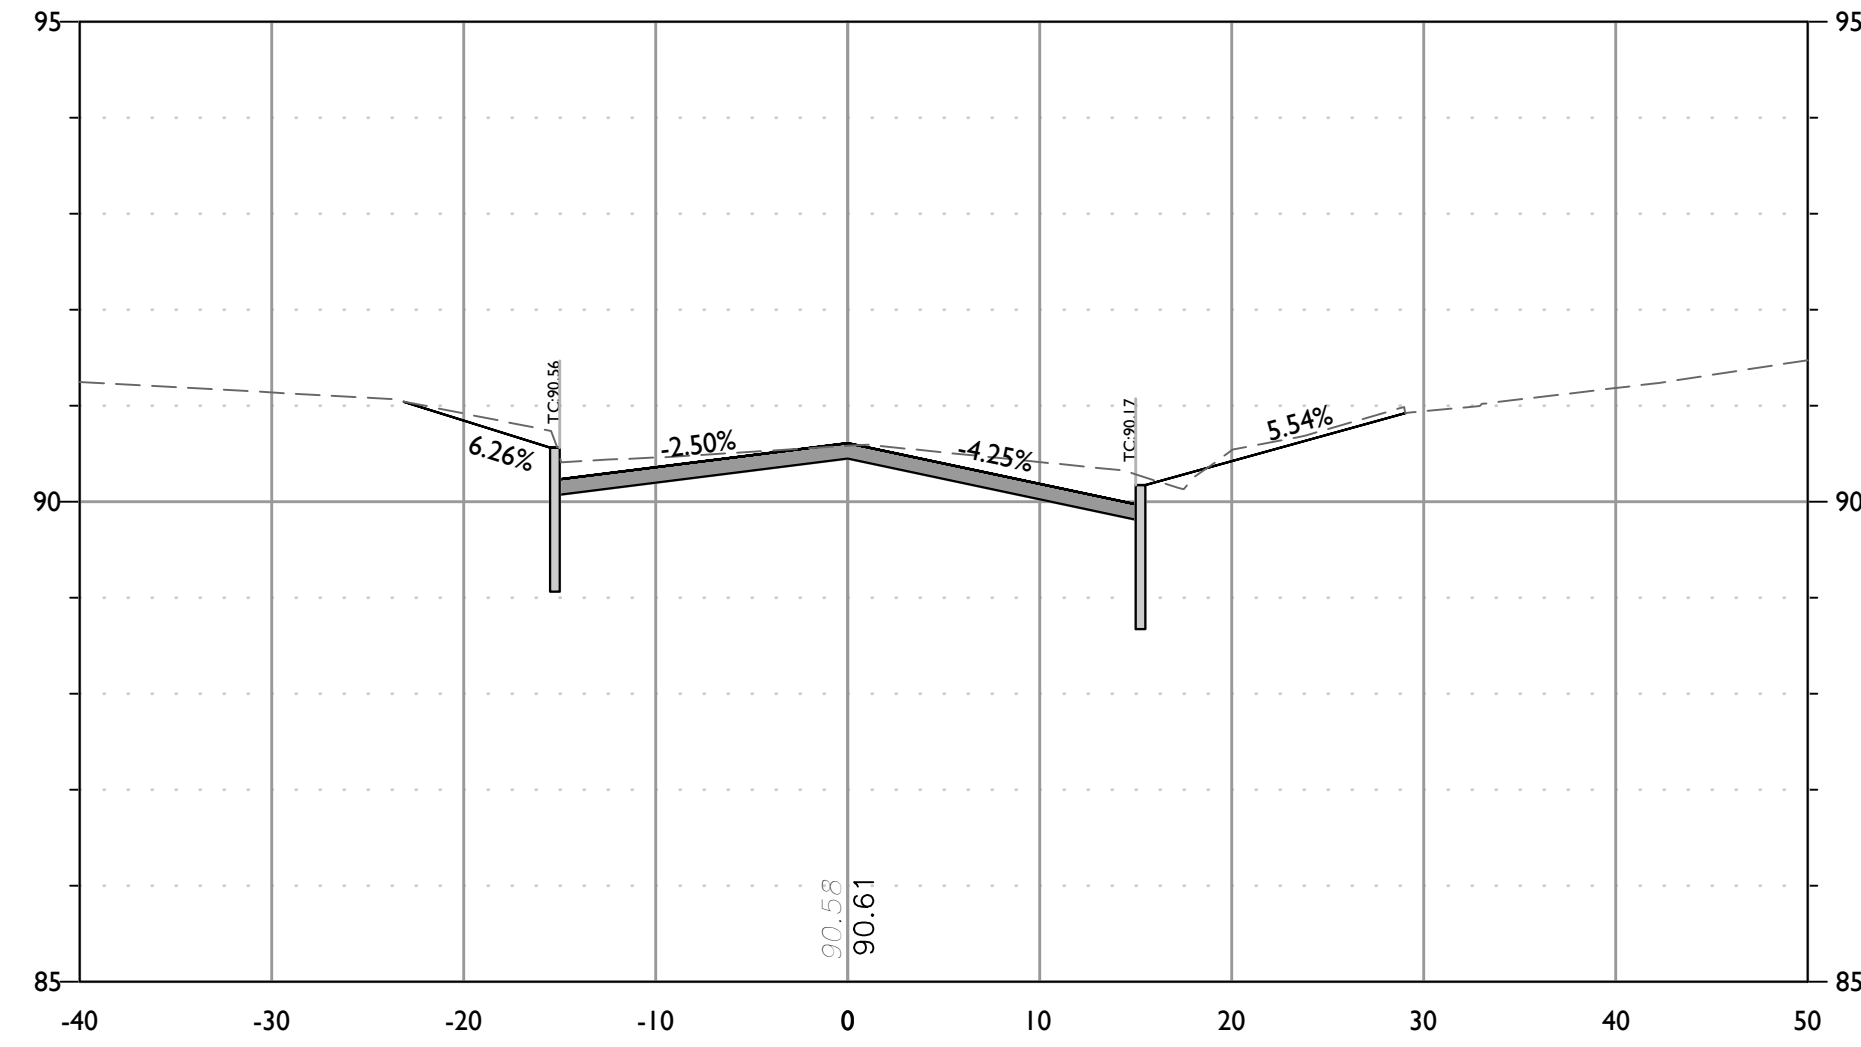


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 4+95  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

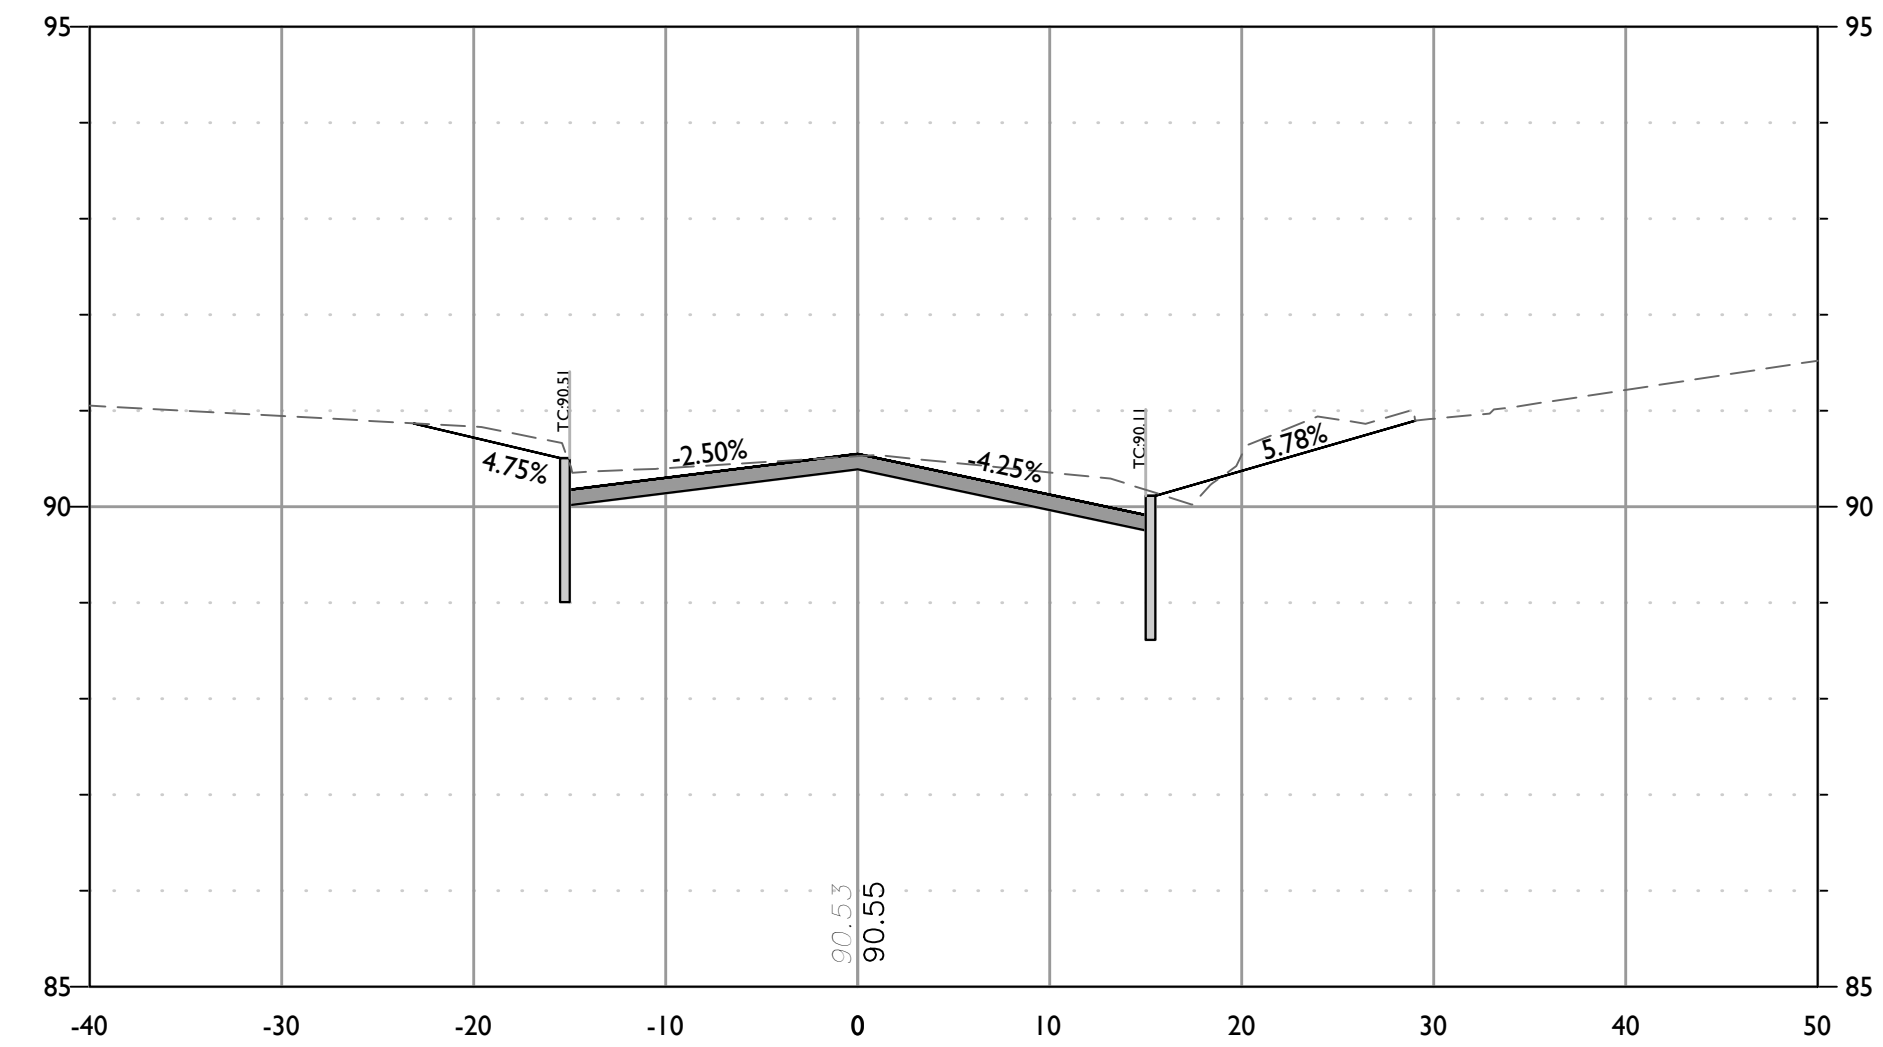


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 5+00  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

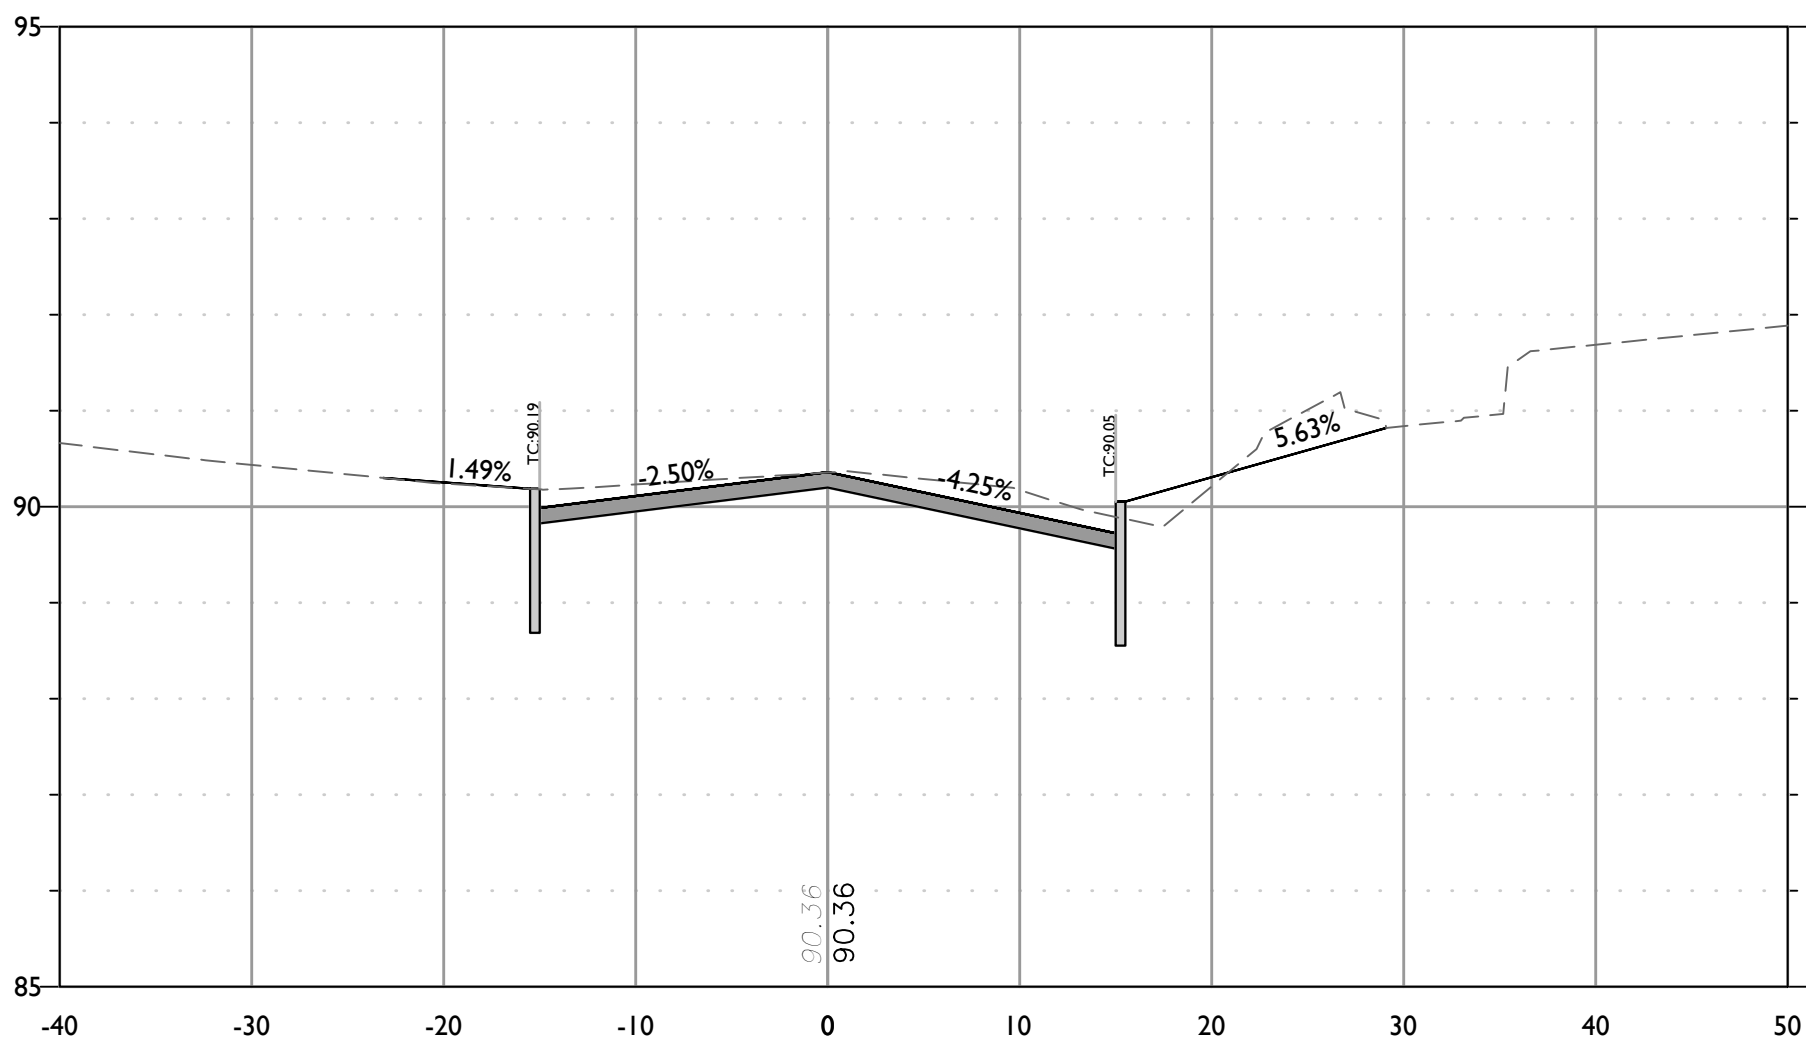


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 5+15  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

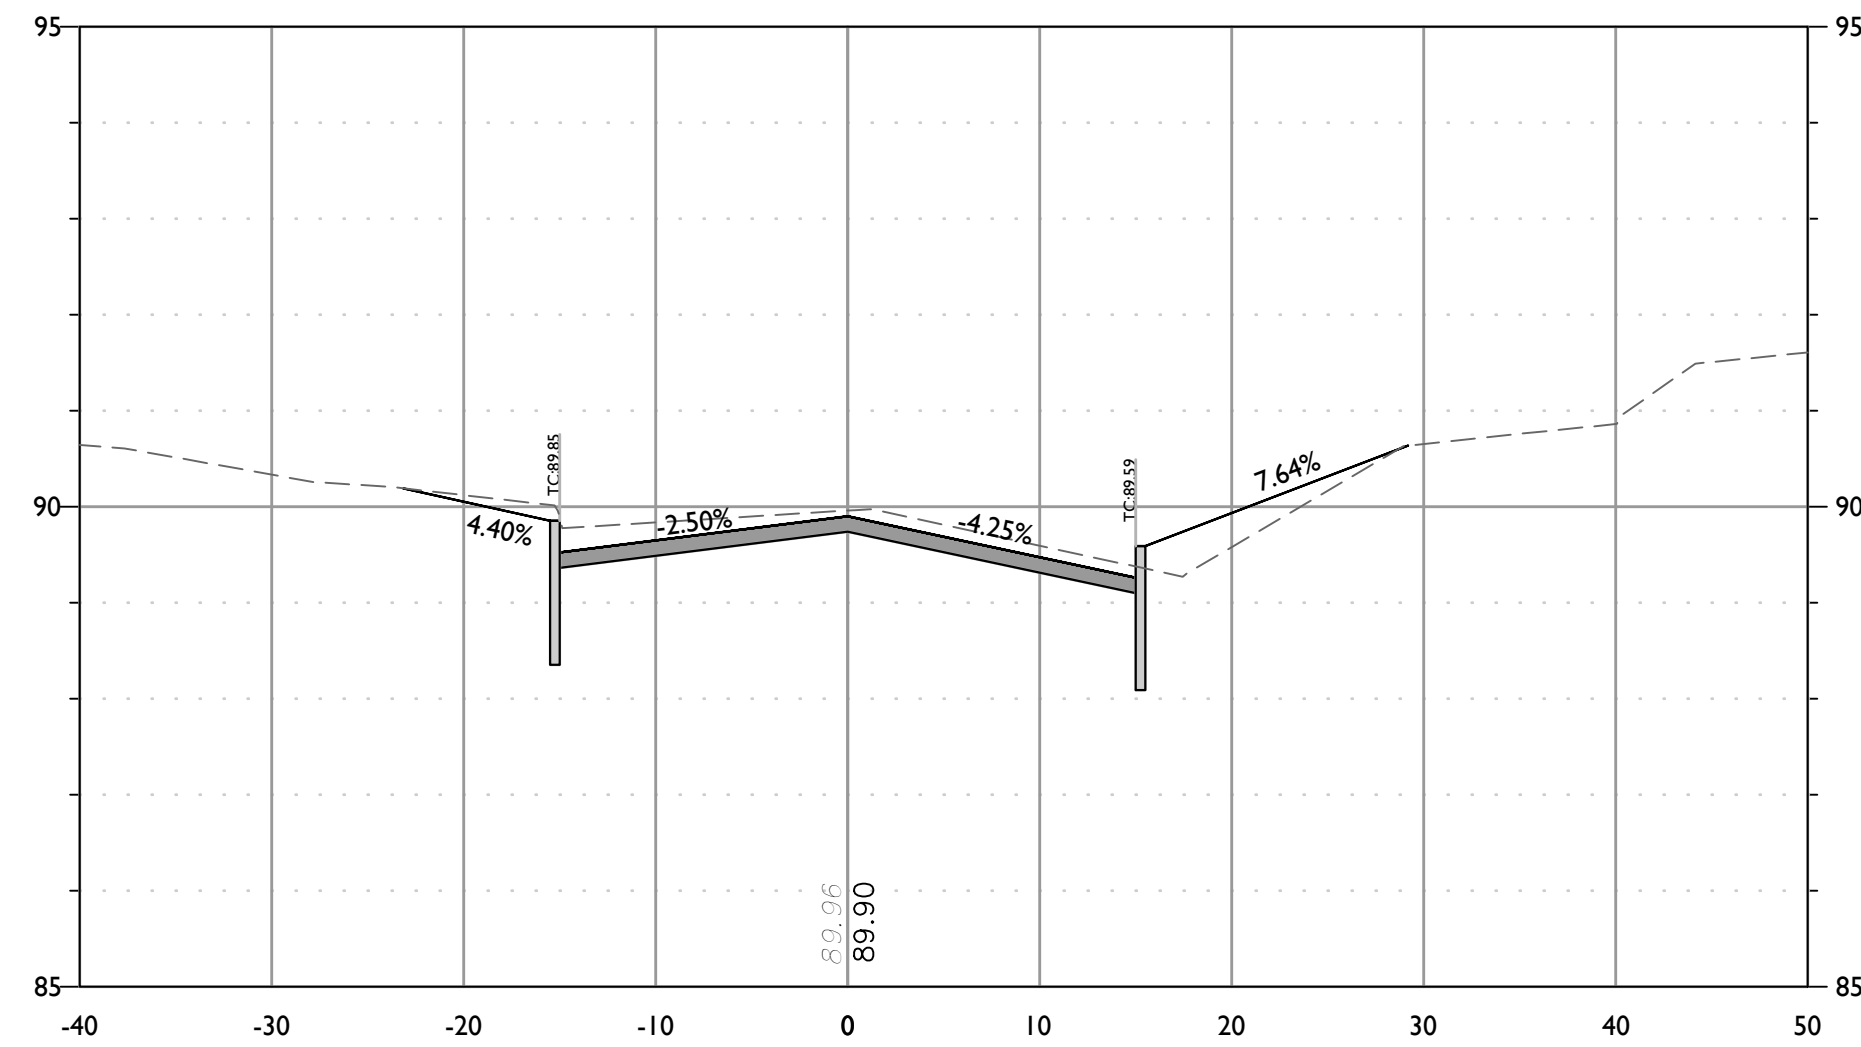


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 5+50  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

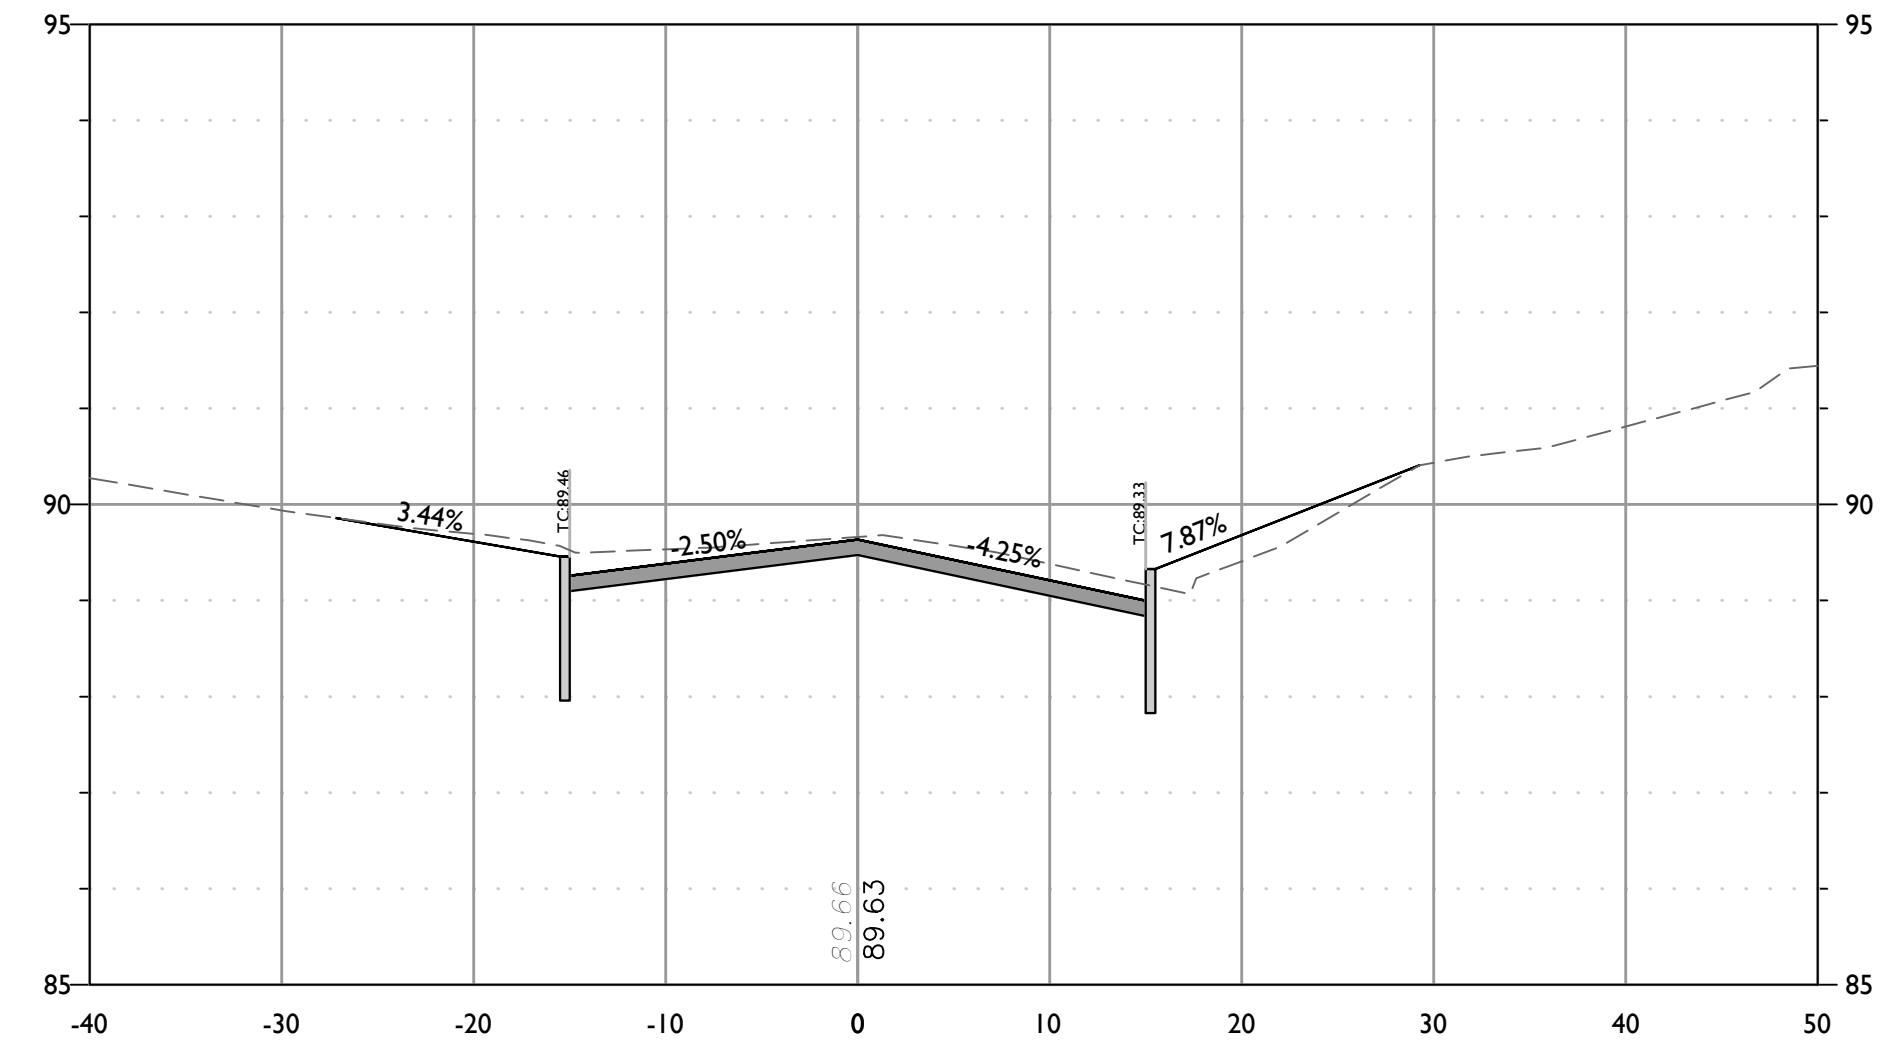


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 5+70  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

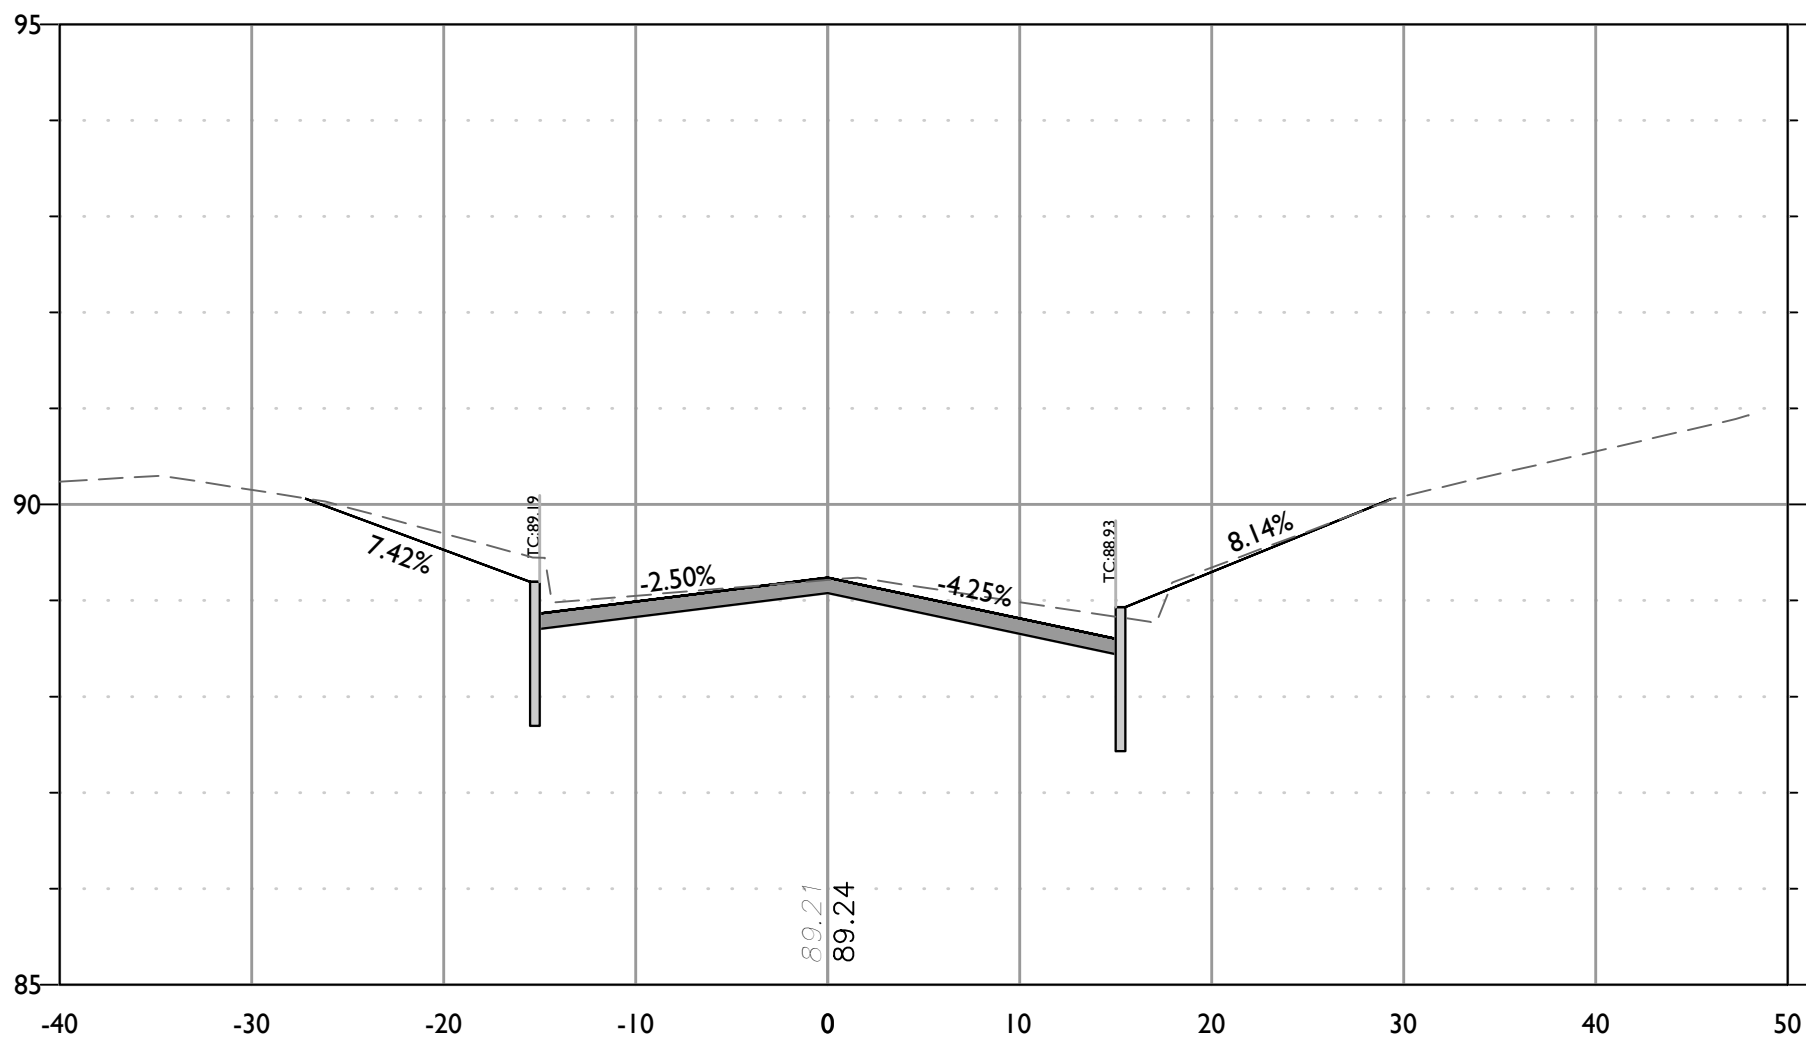

CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 6+00  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

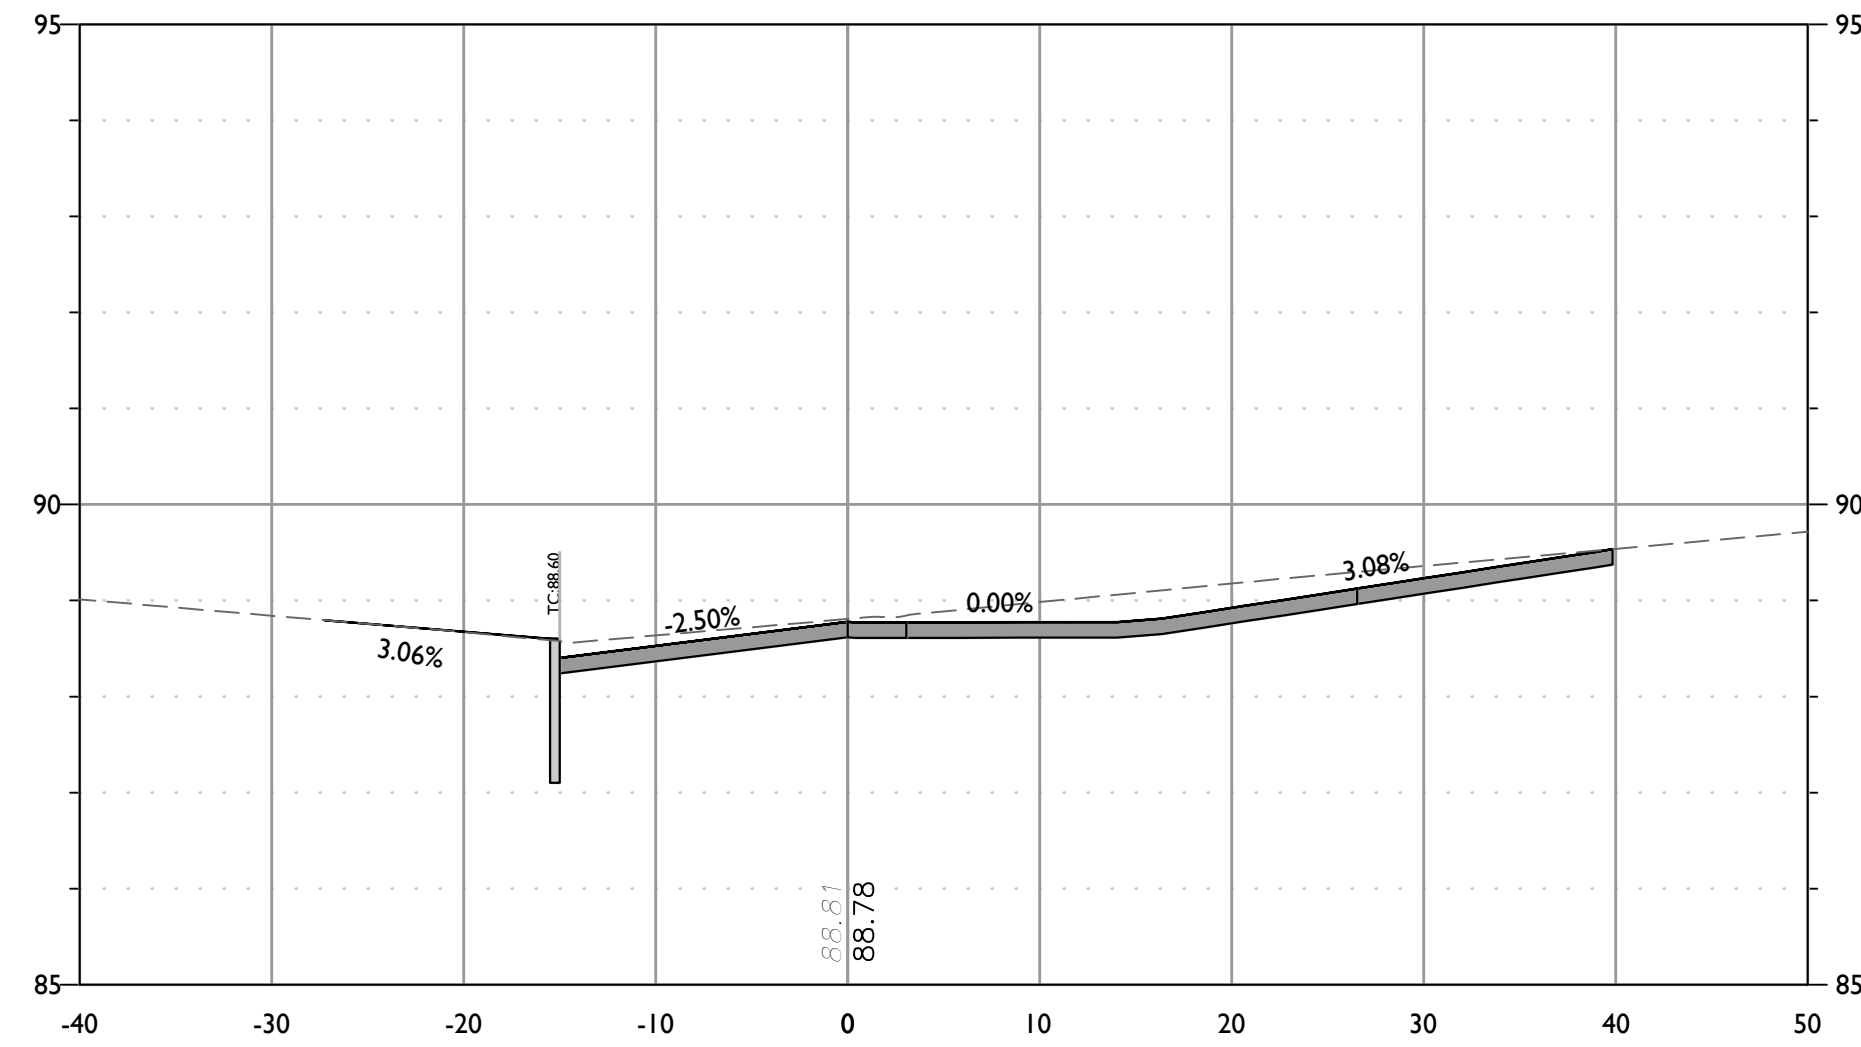

CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 6+35  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

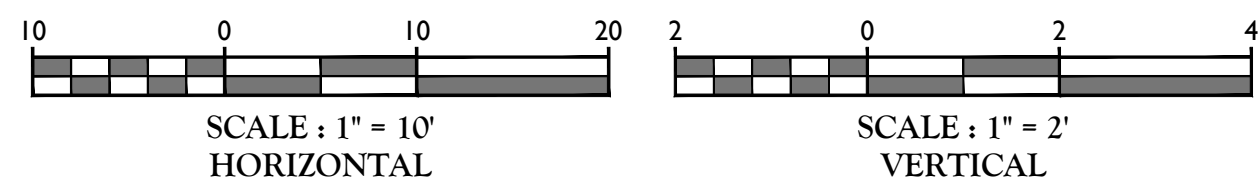

**MASER CONSULTING, P.A.**  
Customer Loyalty through Client Satisfaction  
www.maserconsulting.com  
Office Locations:  
NEW JERSEY NEW YORK MARYLAND  
PENNSYLVANIA GEORGIA  
VIRGINIA TEXAS  
FLORIDA TENNESSEE  
NORTH CAROLINA COLORADO  
State of NJ, C.O.A.: 24GA27986500  
Copyright © 2021, Maser Consulting, All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting, P.A.

**811**  
PROTECT YOURSELF  
ALL STATES REQUIRE NOTIFICATION OF EXCAVATORS, DESIGNERS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE  
Know what's below.  
Call before you dig.  
FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM

REV	DATE	DRAWN BY	DESCRIPTION
1	6/8/20	BAK	REVISED PER NJDOT COMMENTS
2	6/15/20	BAK	REVISED PER CURB CHANGES
3	6/17/20	BAK	REVISED FOR SCD SUBMISSION
4	7/7/20	BAK	REVISED PER SCD COMMENTS
5	3/5/21	BAK	REVISED PER TOWNSHIP COMMENTS
6	4/2/21	BAK	REVISED PER NJDOT COMMENTS

*Carl P. O'Brien*  
**CARL P. O'BRIEN**  
NEW JERSEY PROFESSIONAL  
ENGINEER - LICENSE NUMBER: GE45154

CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS


TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY

**M.T. ARLINGTON OFFICE**  
400 Valley Road  
Suite 304  
Mount Arlington, NJ 07856  
Phone: 973.398.3110  
Fax: 973.398.3199


SCALE:	DATE:	DRAWN BY:	CHECKED BY:
AS SHOWN	1/30/20	BAK	PWj
PROJECT NUMBER:		DRAWING NAME:	
CDT065		C-LAYT	

SHEET TITLE:  
**CROSS SECTIONS**  
SHEET NUMBER:  
12 of 36




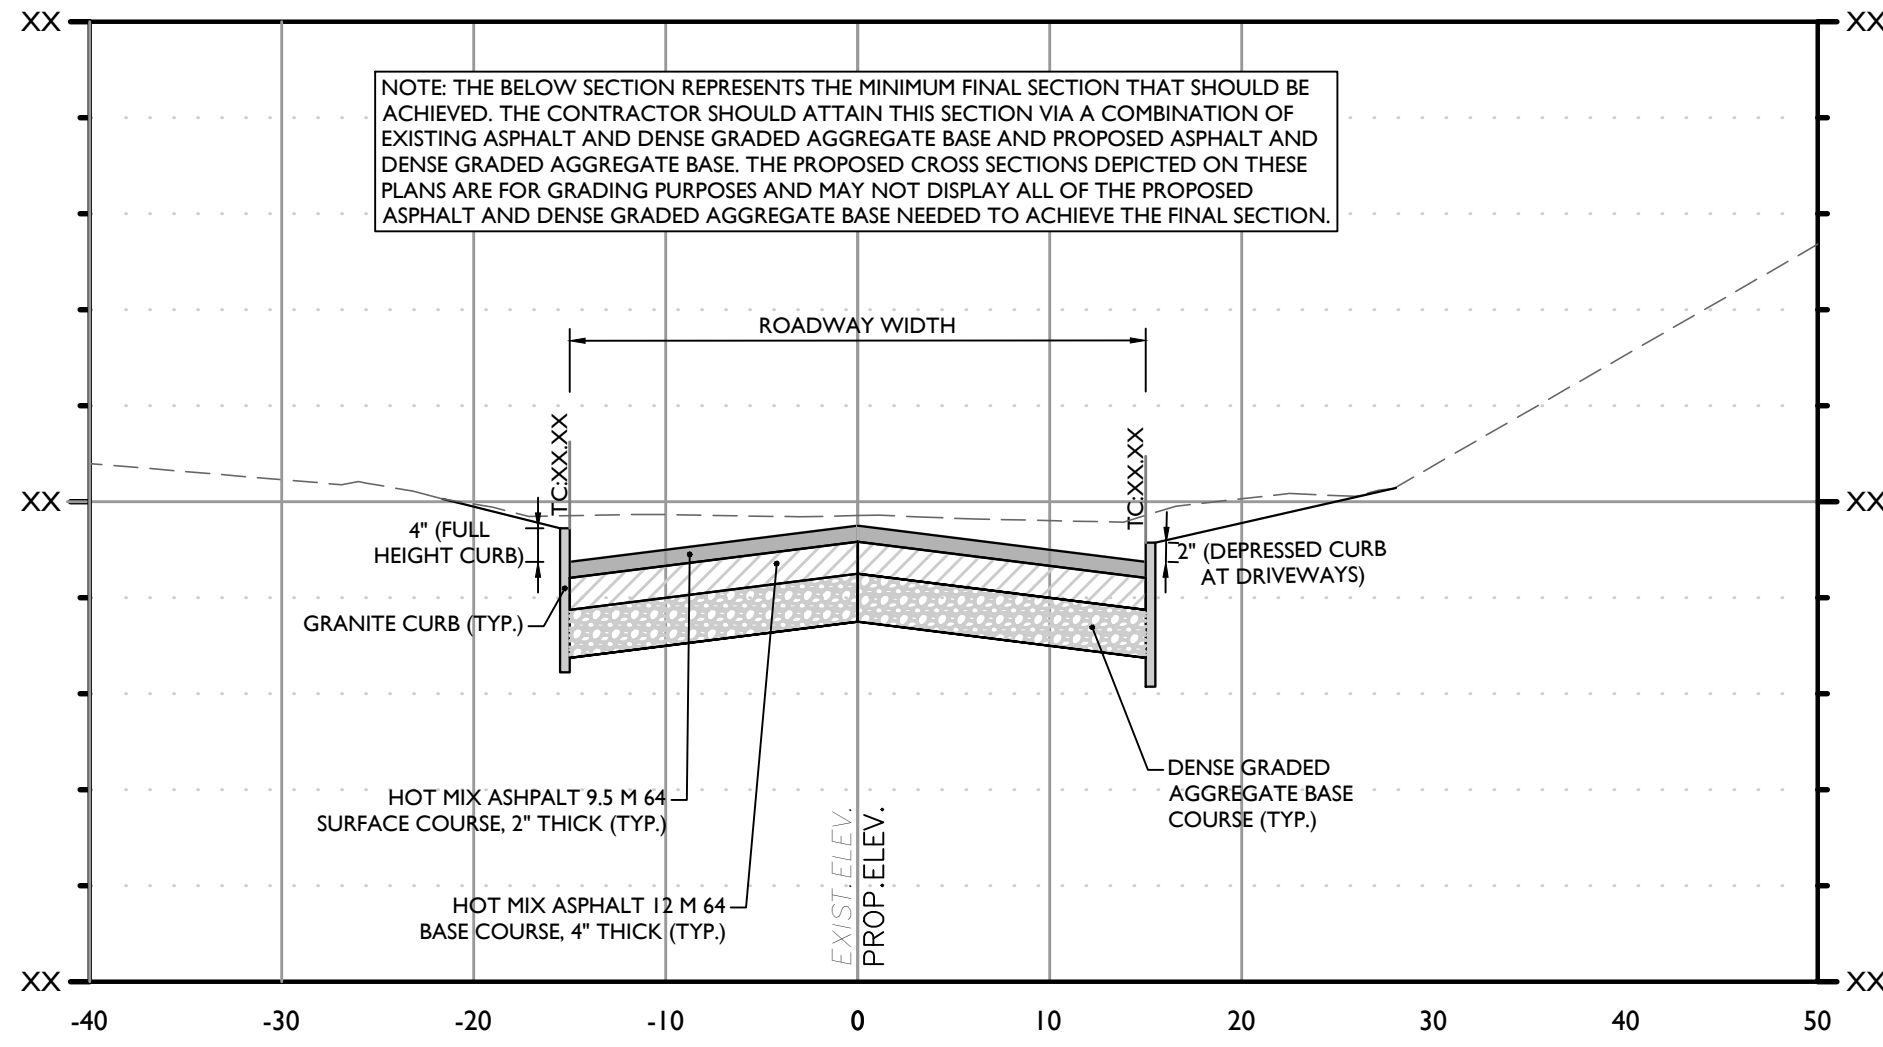


TYPICAL CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: XX+XX.XX  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

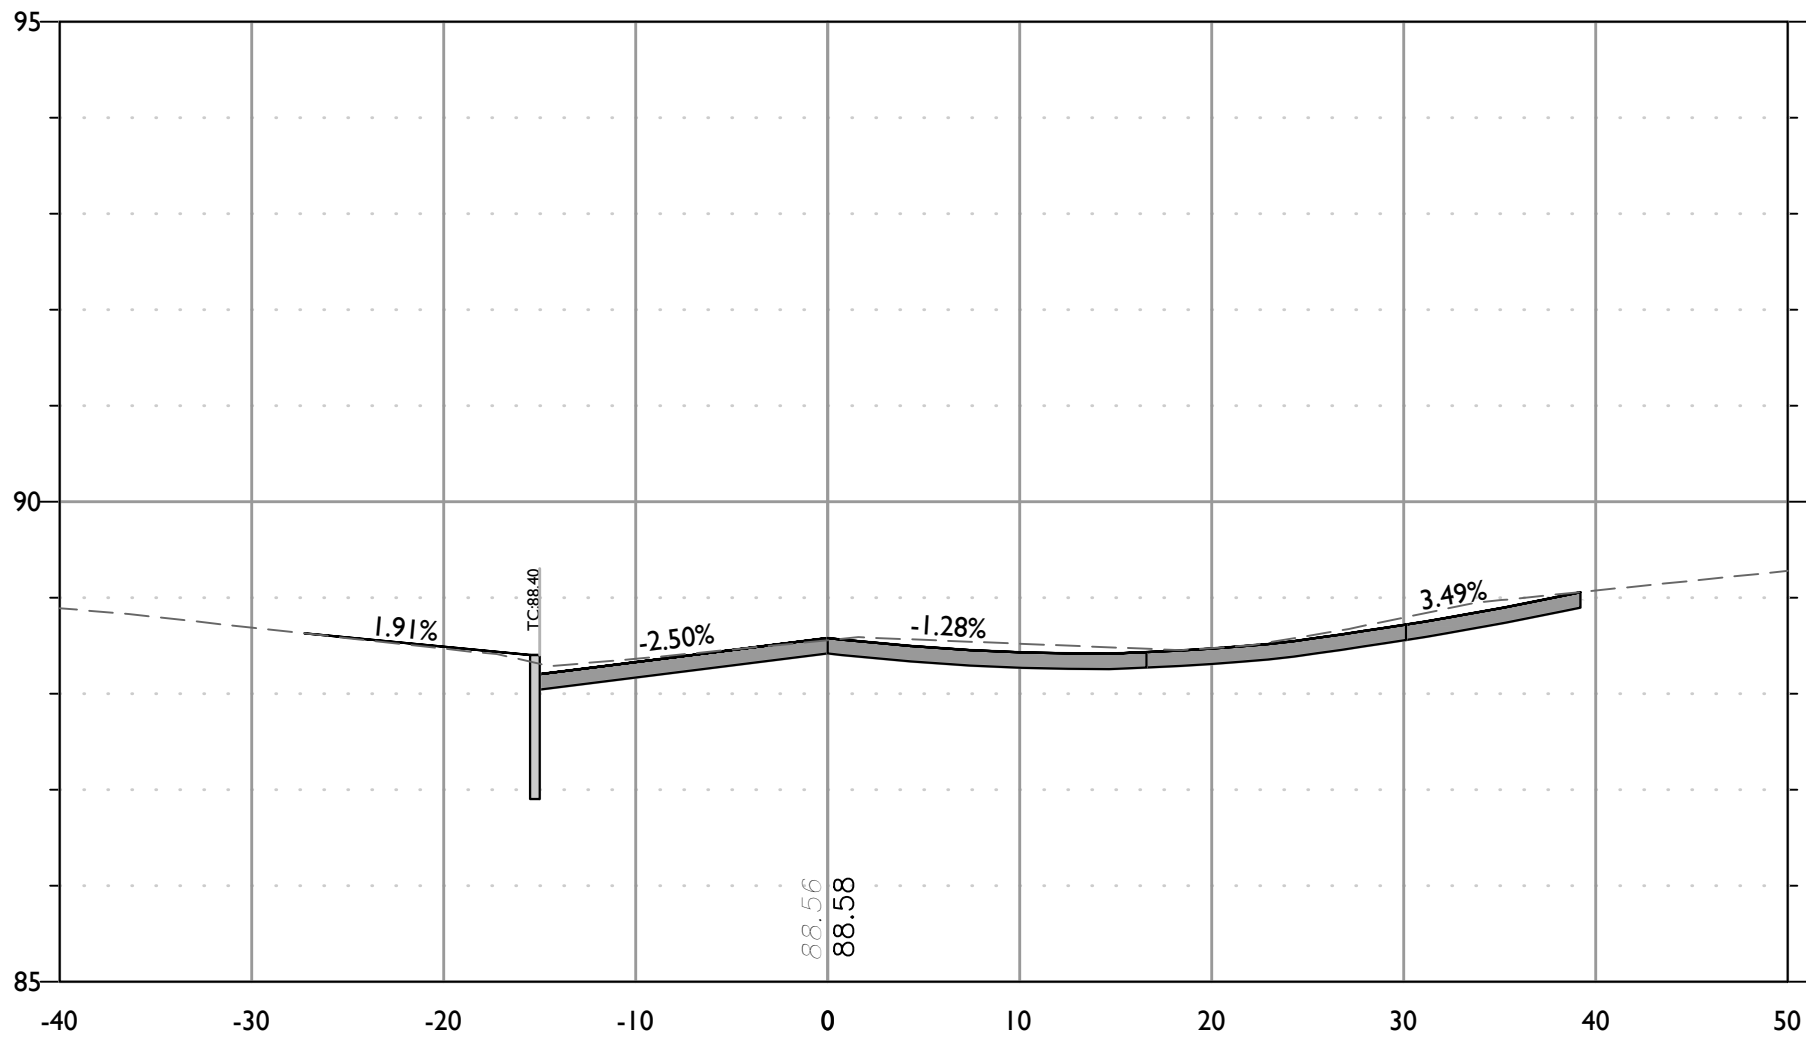


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 6+50  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

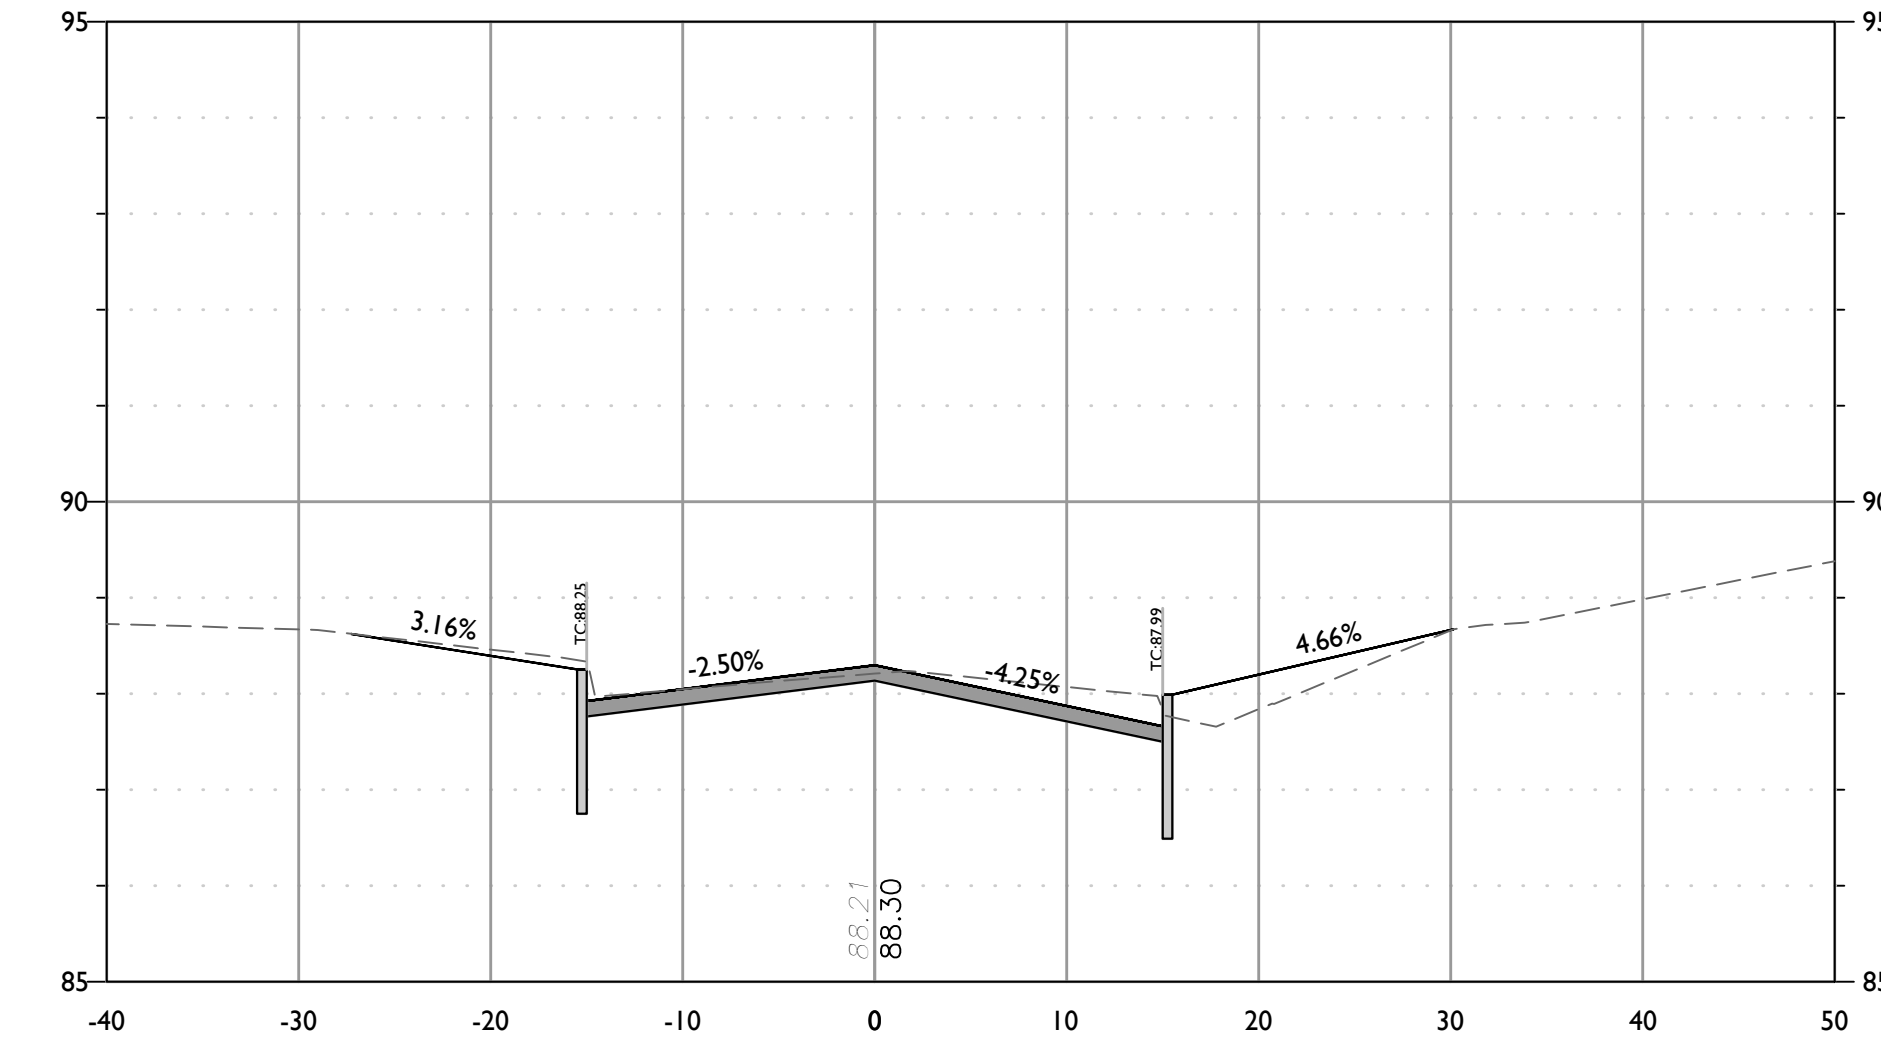


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 6+70.23  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

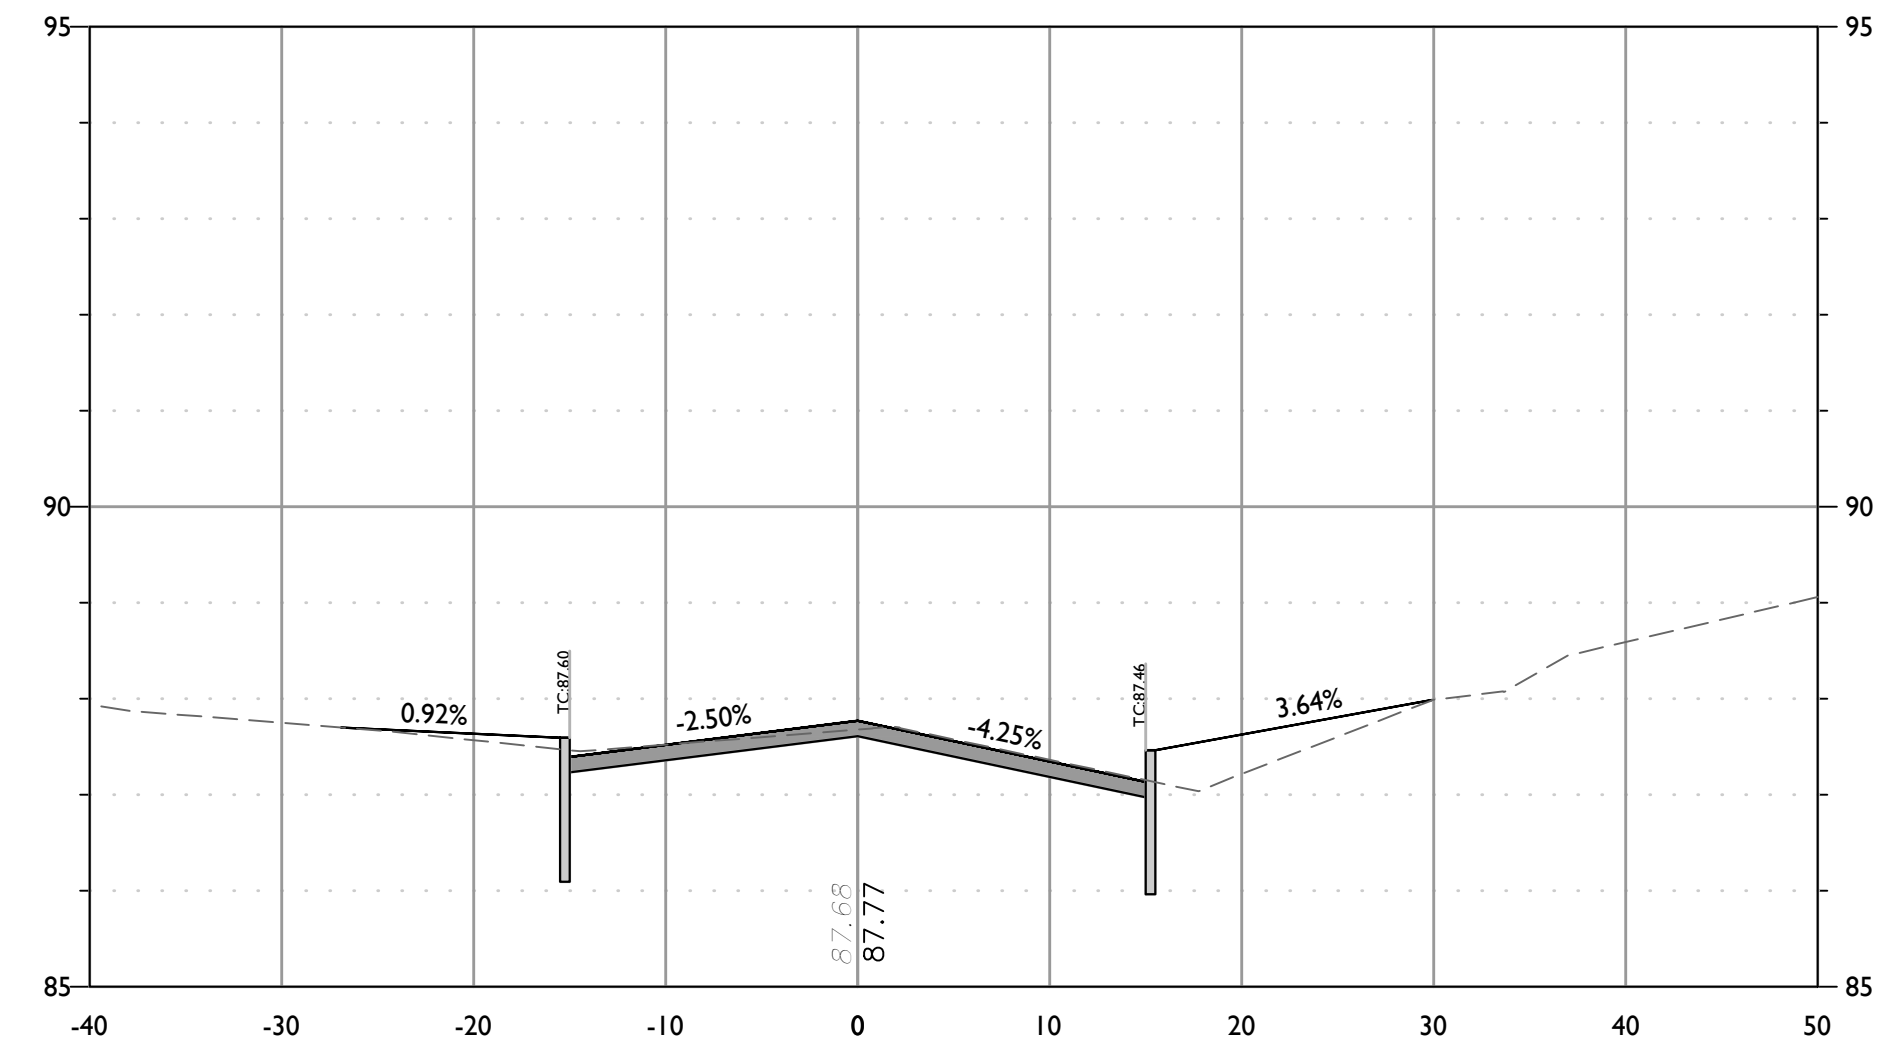


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 7+00  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

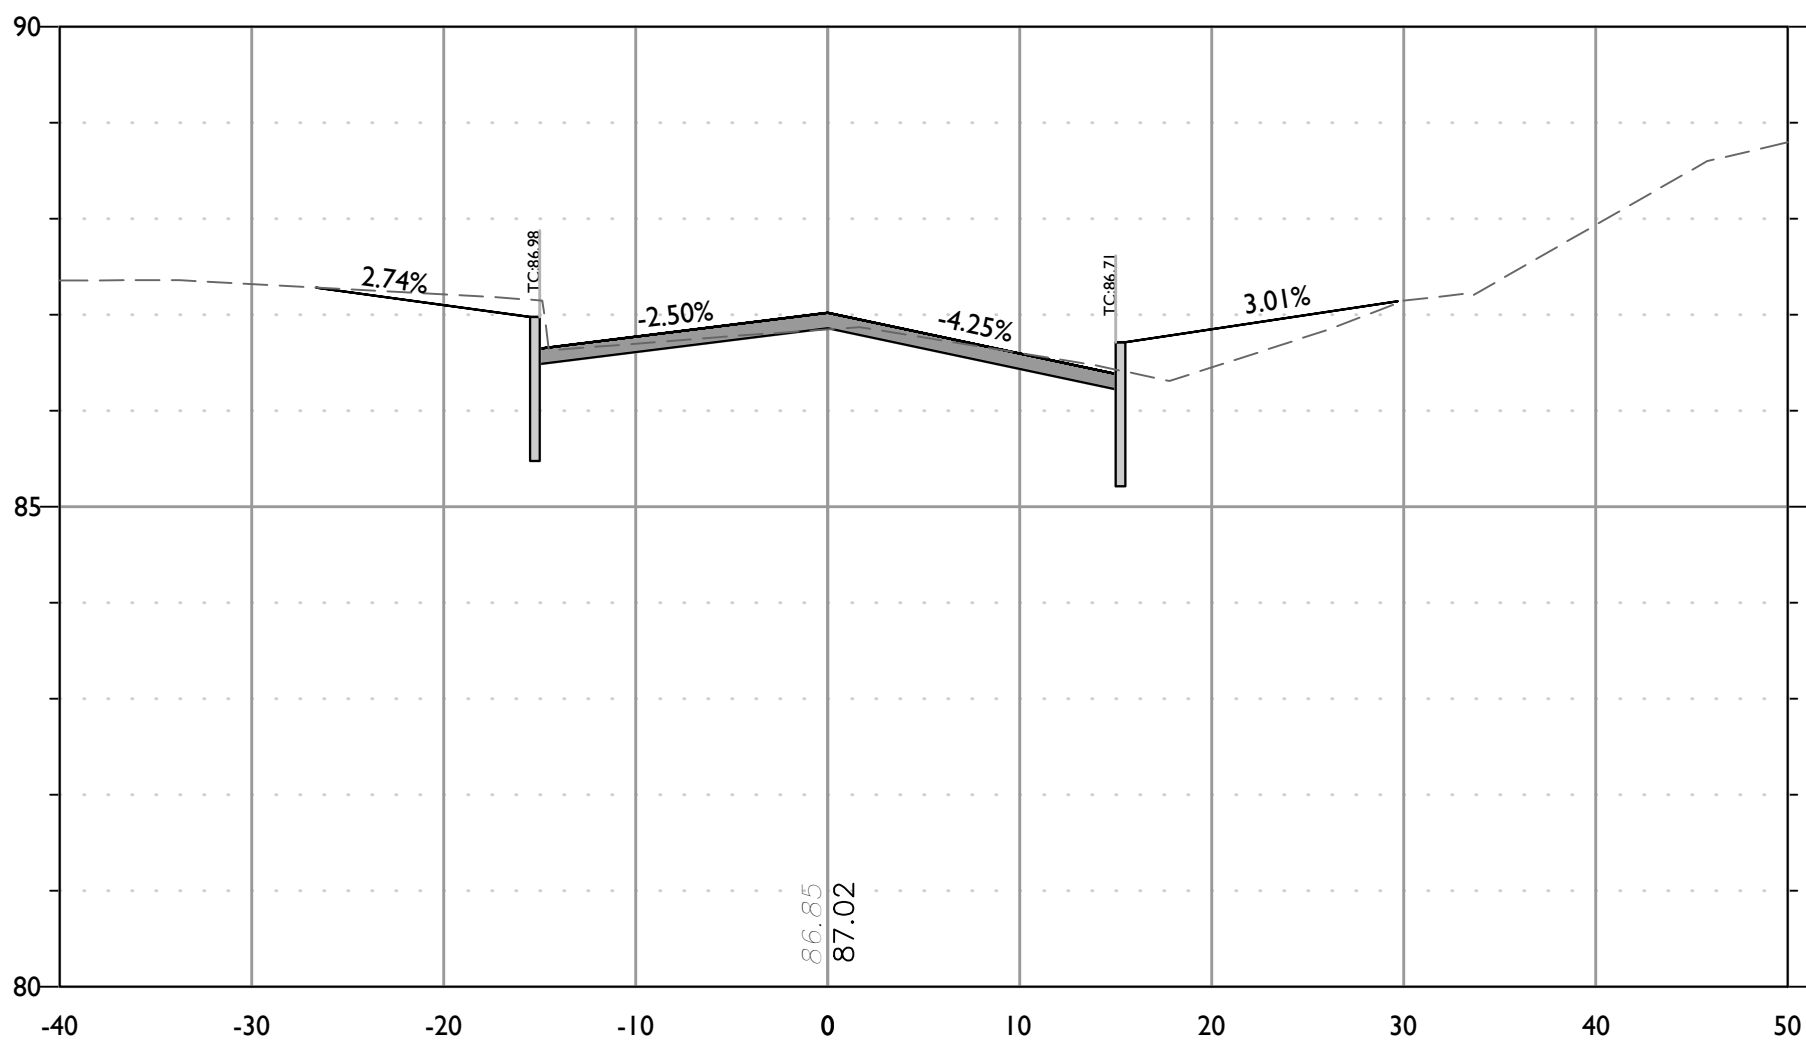


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 7+33.13  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

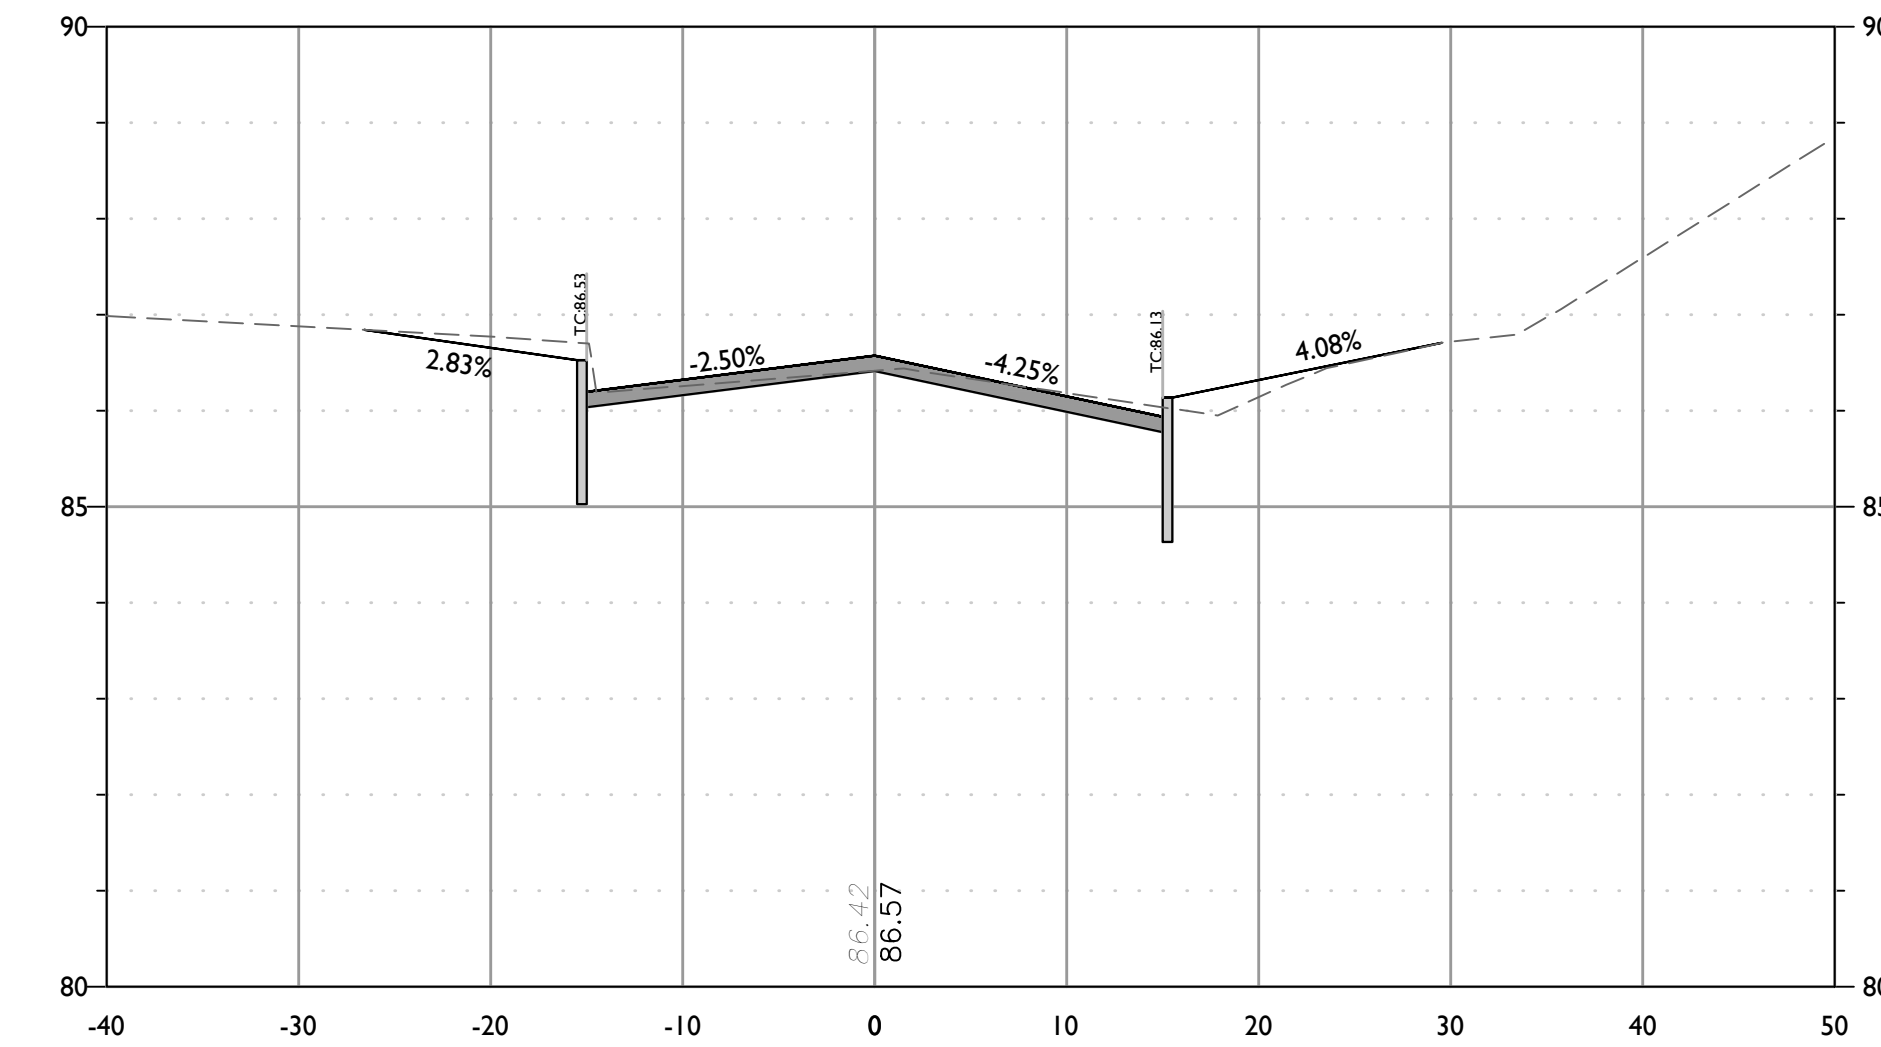


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 7+50  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

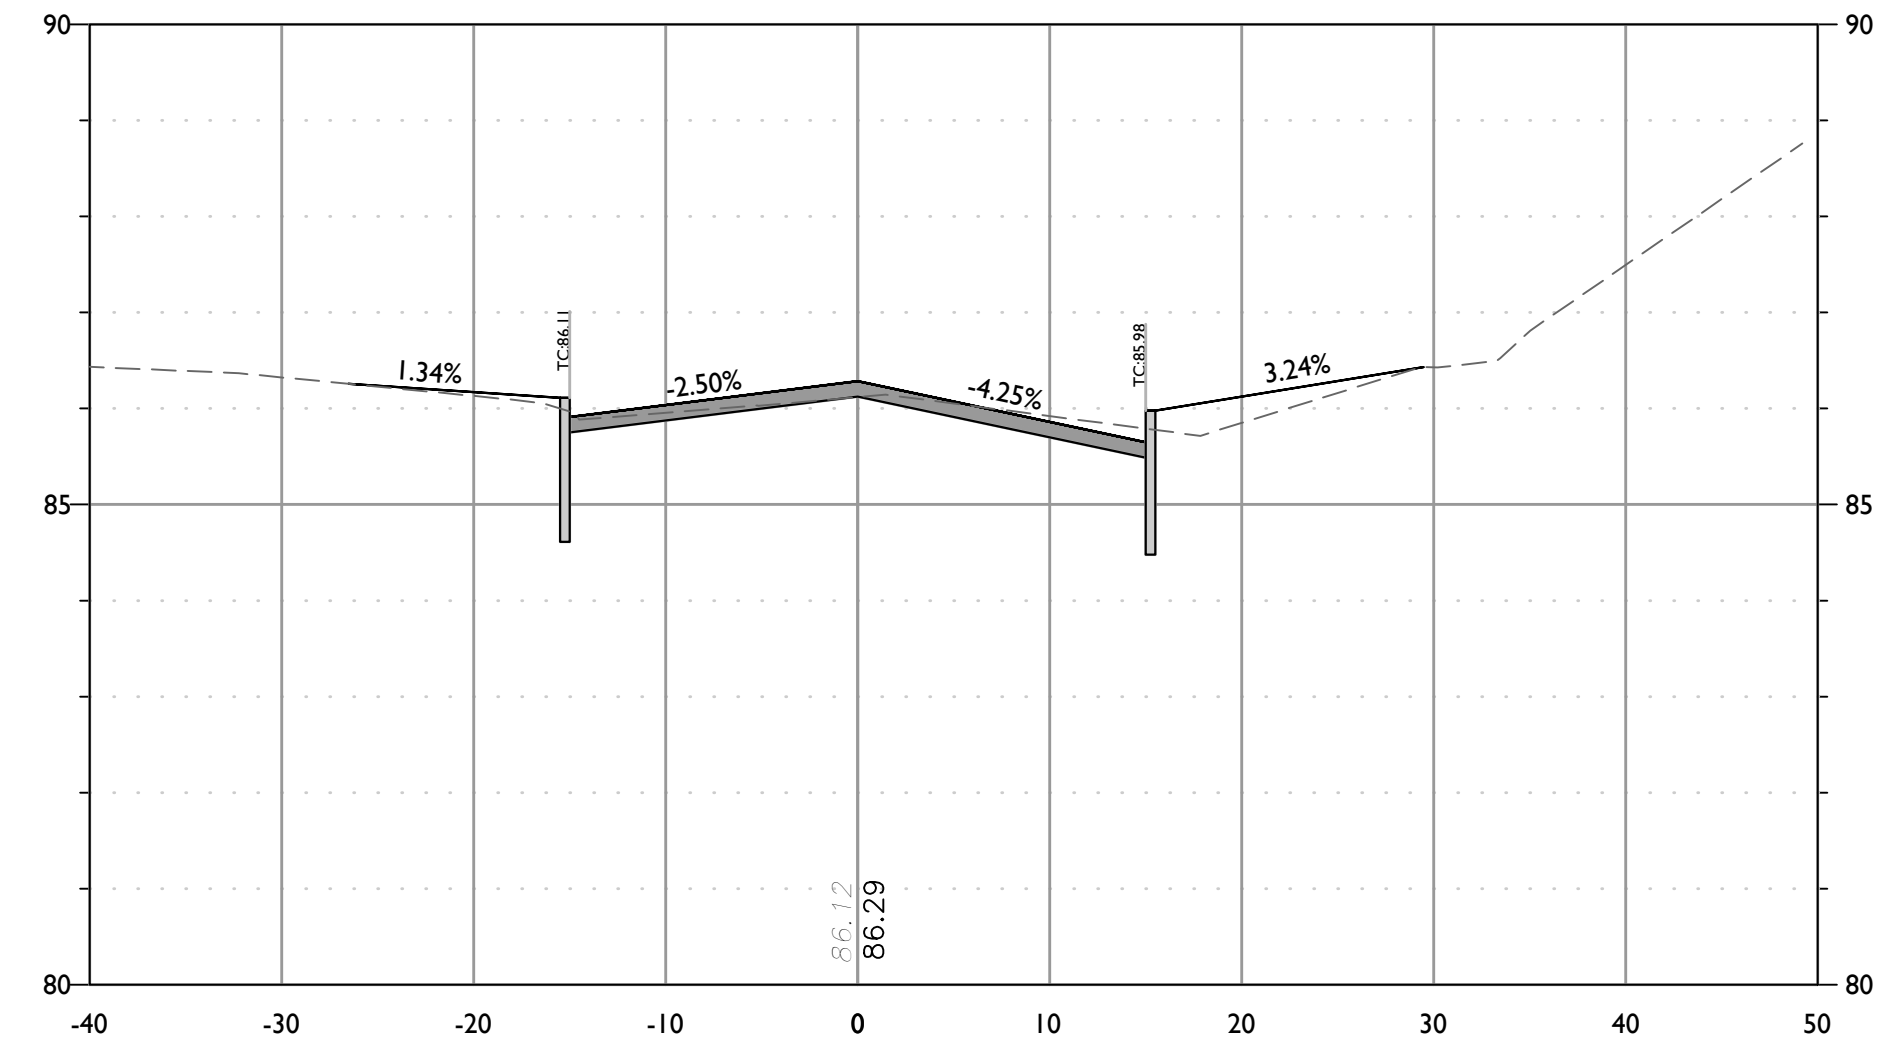


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 7+60  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

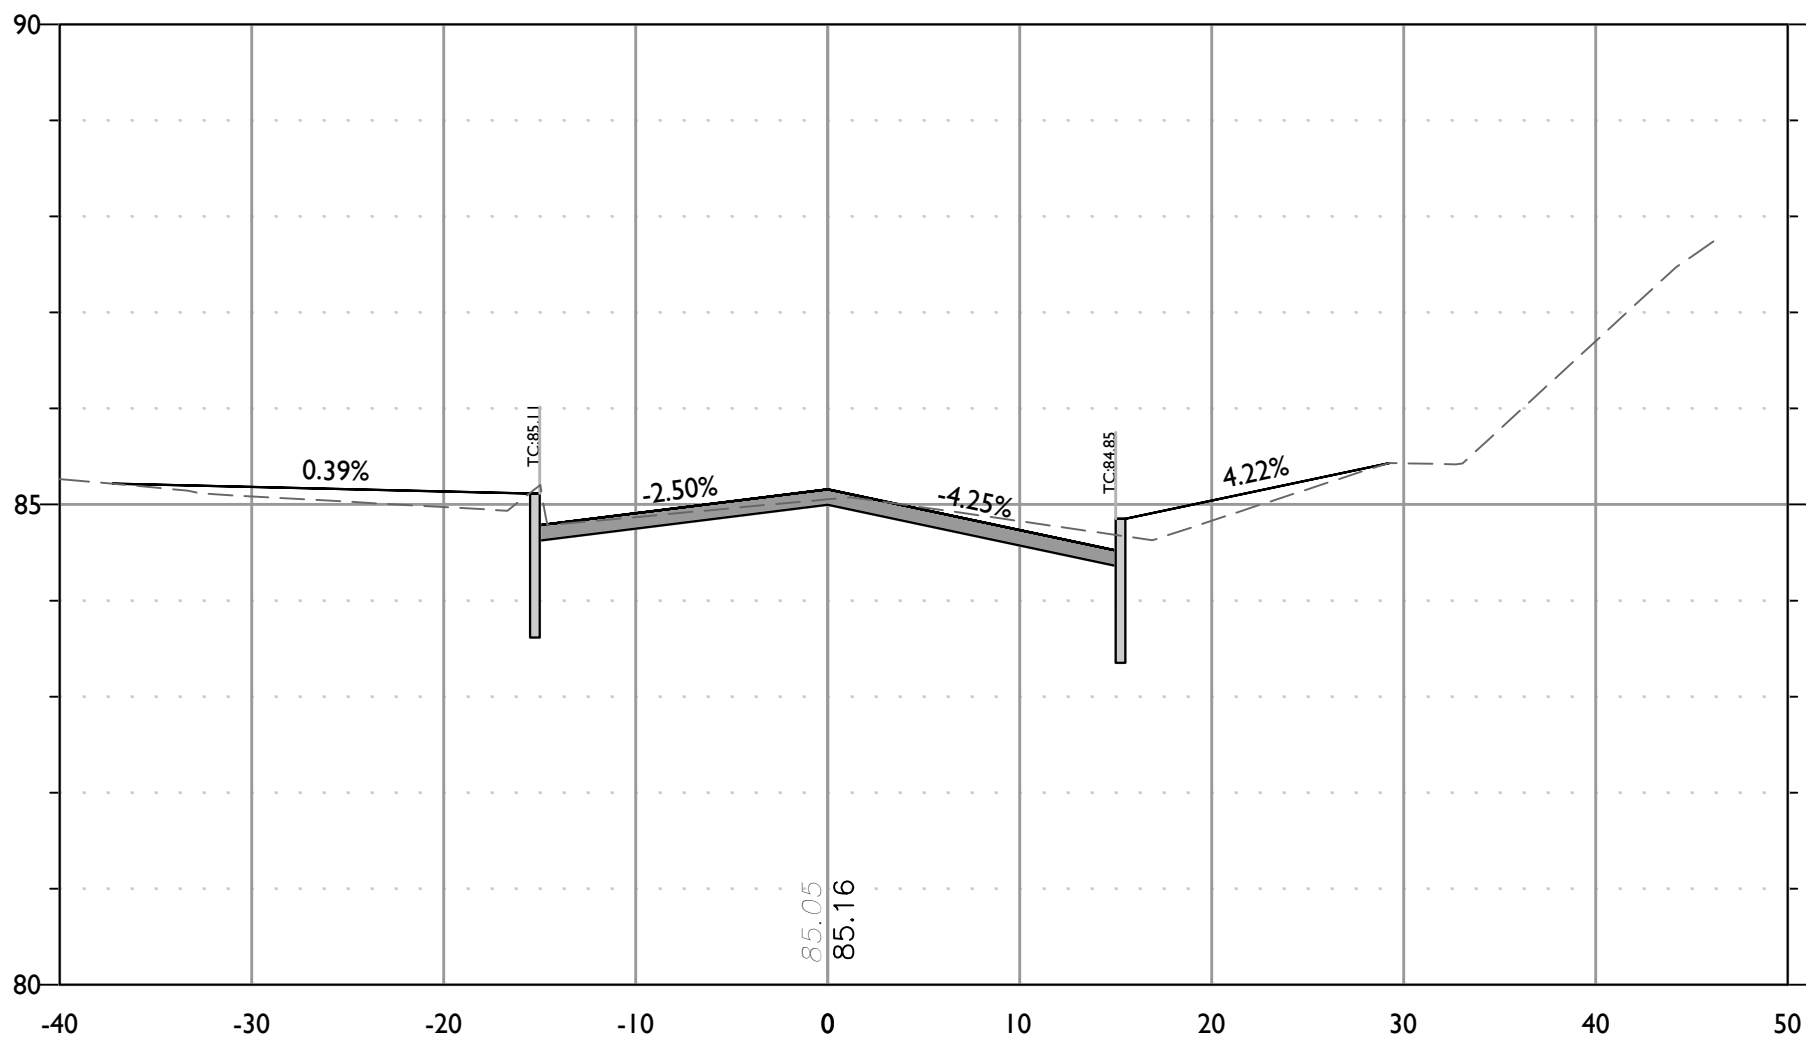

CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 7+96.03  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

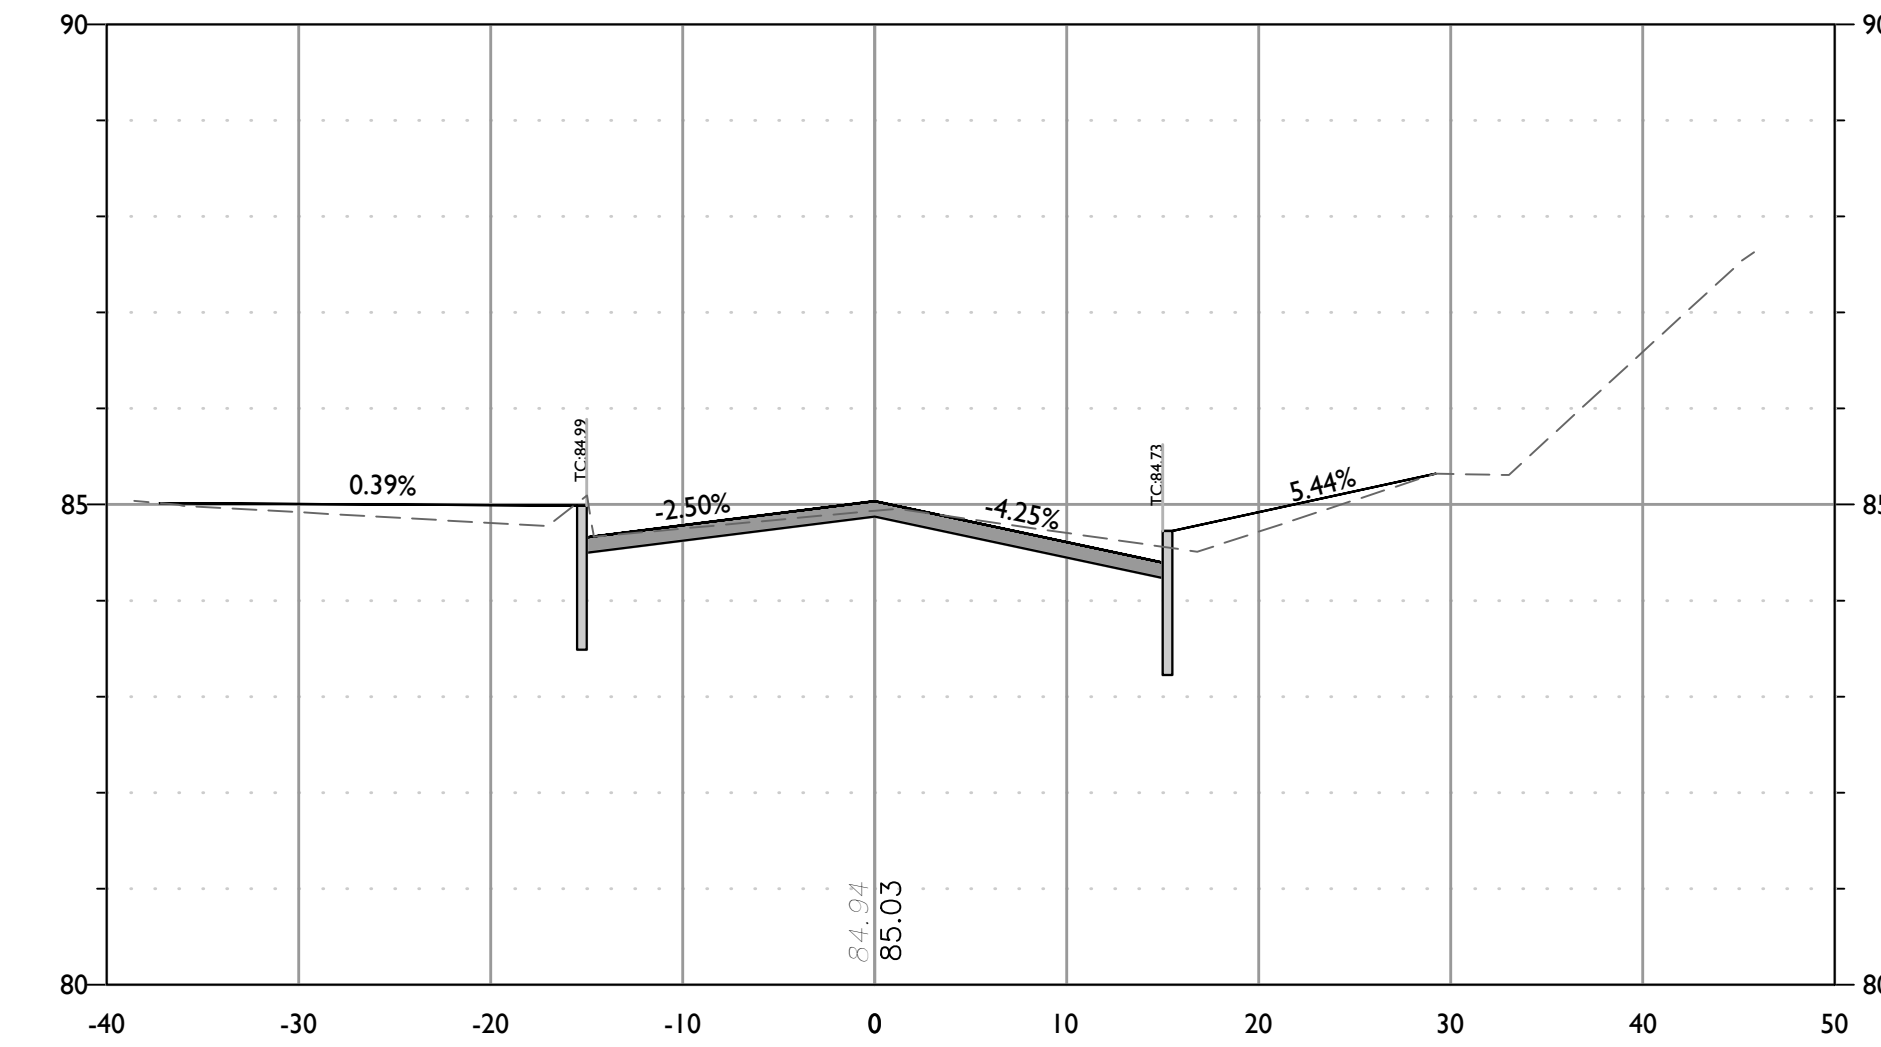

CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 8+00  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

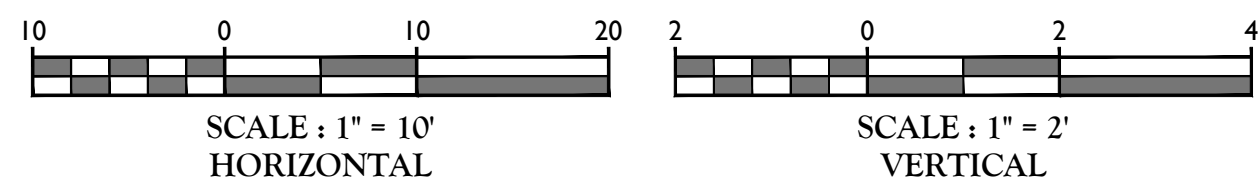

**MASER CONSULTING, P.A.**  
Customer Loyalty through Client Satisfaction  
www.maserconsulting.com  
Office Locations:  
NEW JERSEY NEW YORK NEW MEXICO  
PENNSYLVANIA MARYLAND  
VIRGINIA GEORGIA  
FLORIDA TEXAS  
NORTH CAROLINA TENNESSEE  
COLORADO  
State of NJ, C.O.A.: 24GA27986500  
Copyright © 2021, Maser Consulting, All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting, P.A.

**811**  
Know what's below.  
Call before you dig.  
FOR STATE SPECIFIC DIRECT PHONE NUMBERS  
VISIT: WWW.CALL811.COM

REV	DATE	DRAWN BY	DESCRIPTION
1	6/8/20	BAK	REVISED PER NJDOT COMMENTS
2	6/15/20	BAK	REVISED PER CURB CHANGES
3	6/17/20	BAK	REVISED FOR SCD SUBMISSION
4	7/7/20	BAK	REVISED PER SCD COMMENTS
5	3/5/21	BAK	REVISED PER TOWNSHIP COMMENTS
6	4/2/21	BAK	REVISED PER NJDOT COMMENTS

*Carl P. O'Brien*  
**CARL P. O'BRIEN**  
NEW JERSEY PROFESSIONAL  
ENGINEER - LICENSE NUMBER: GE45154

CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS  
TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY


**M.T. ARLINGTON OFFICE**  
400 Valley Road  
Suite 304  
Mount Arlington, NJ 07856  
Phone: 973.398.3110  
Fax: 973.398.3199

SCALE:	DATE:	DRAWN BY:	CHECKED BY:
AS SHOWN	1/30/20	BAK	PWJ
PROJECT NUMBER:	DRAWING NAME:		
CDT065	CLAYT		


SHEET TITLE:  
**CROSS SECTIONS**  
SHEET NUMBER:  
13 of 36

NOTE: DO NOT SCALE DRAWINGS FOR CONSTRUCTION.




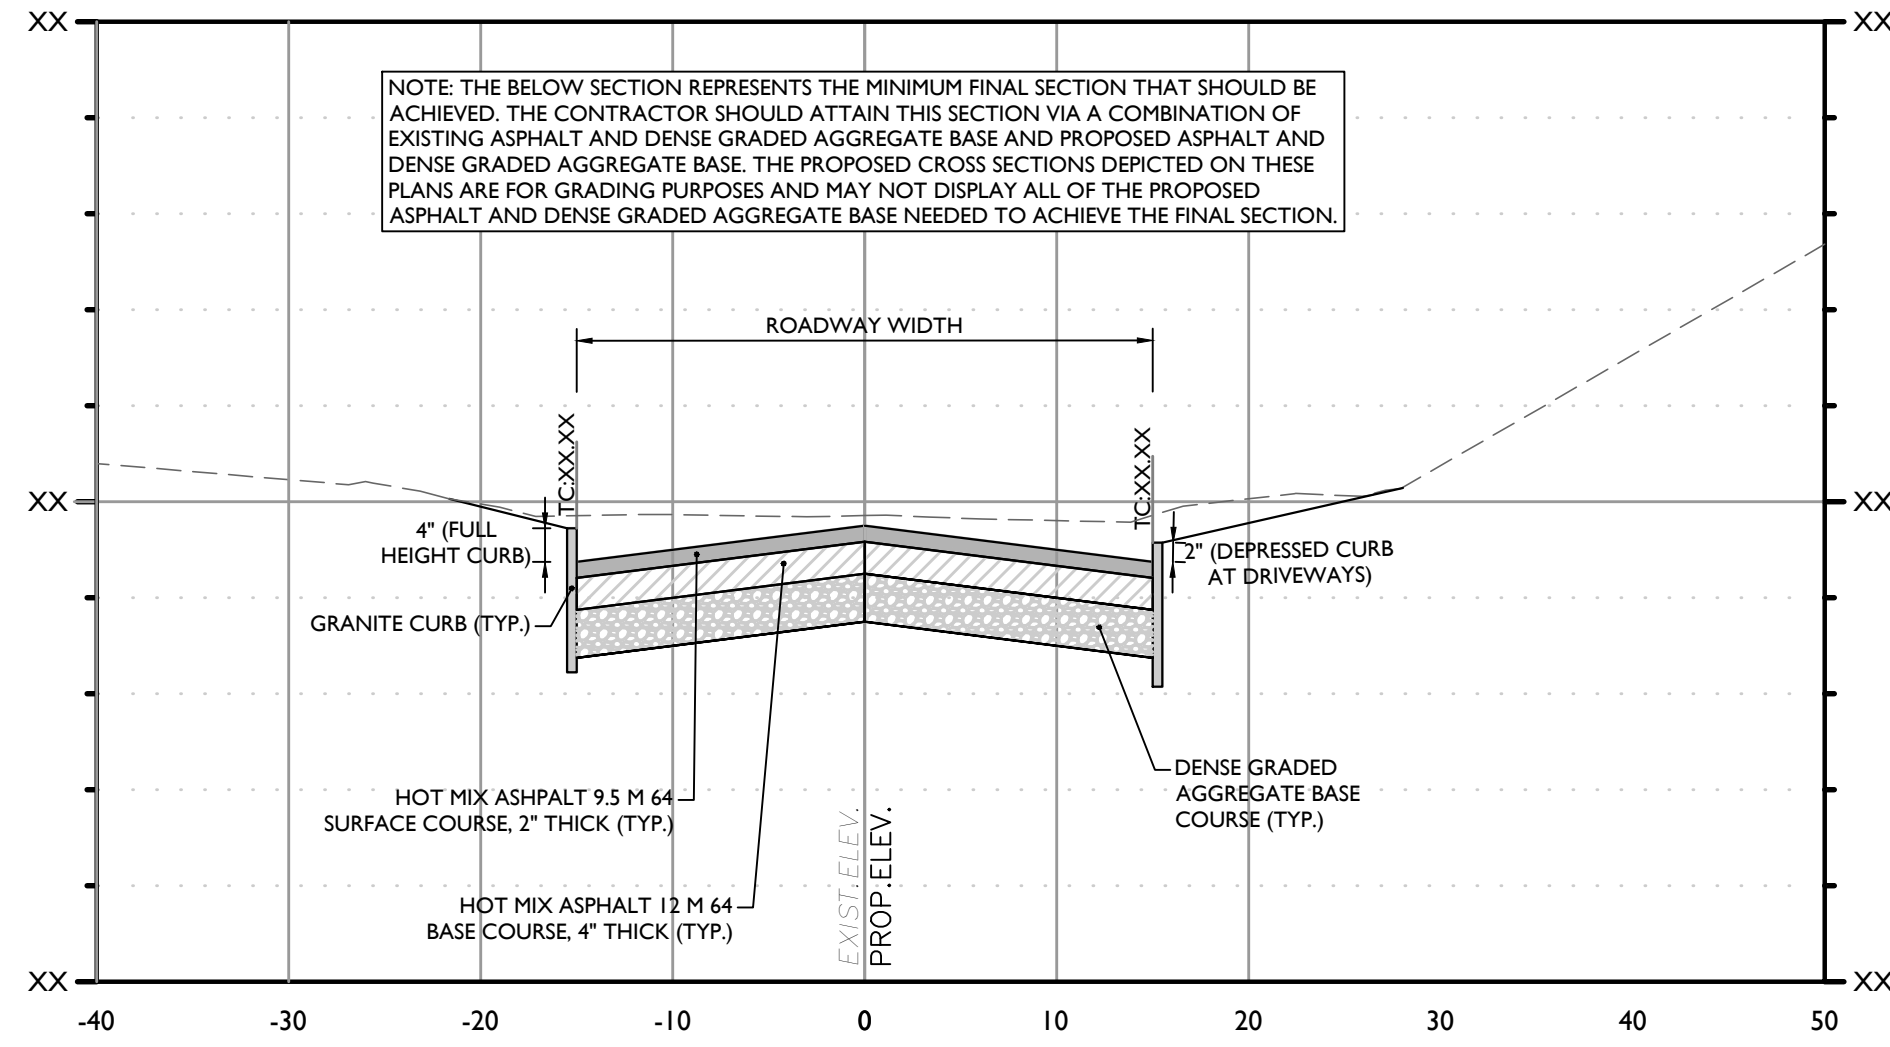


TYPICAL CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: XX+XX.XX  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

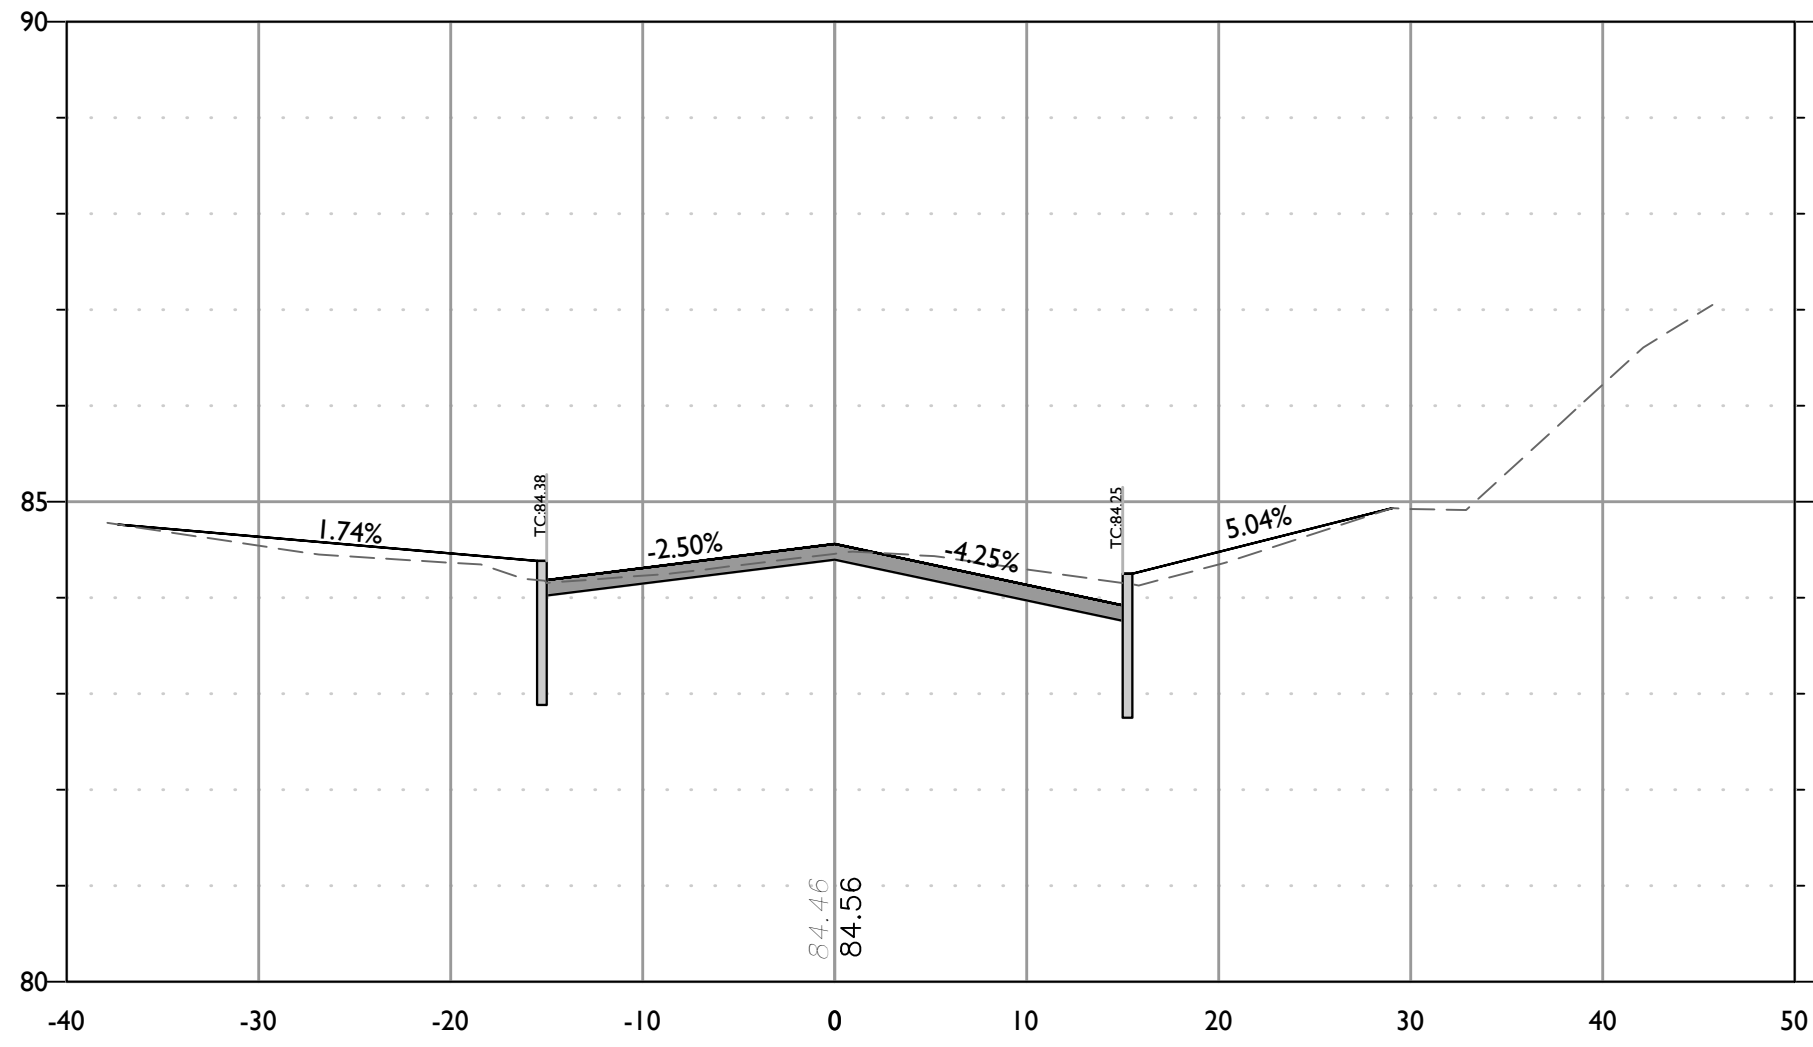


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 8+15  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

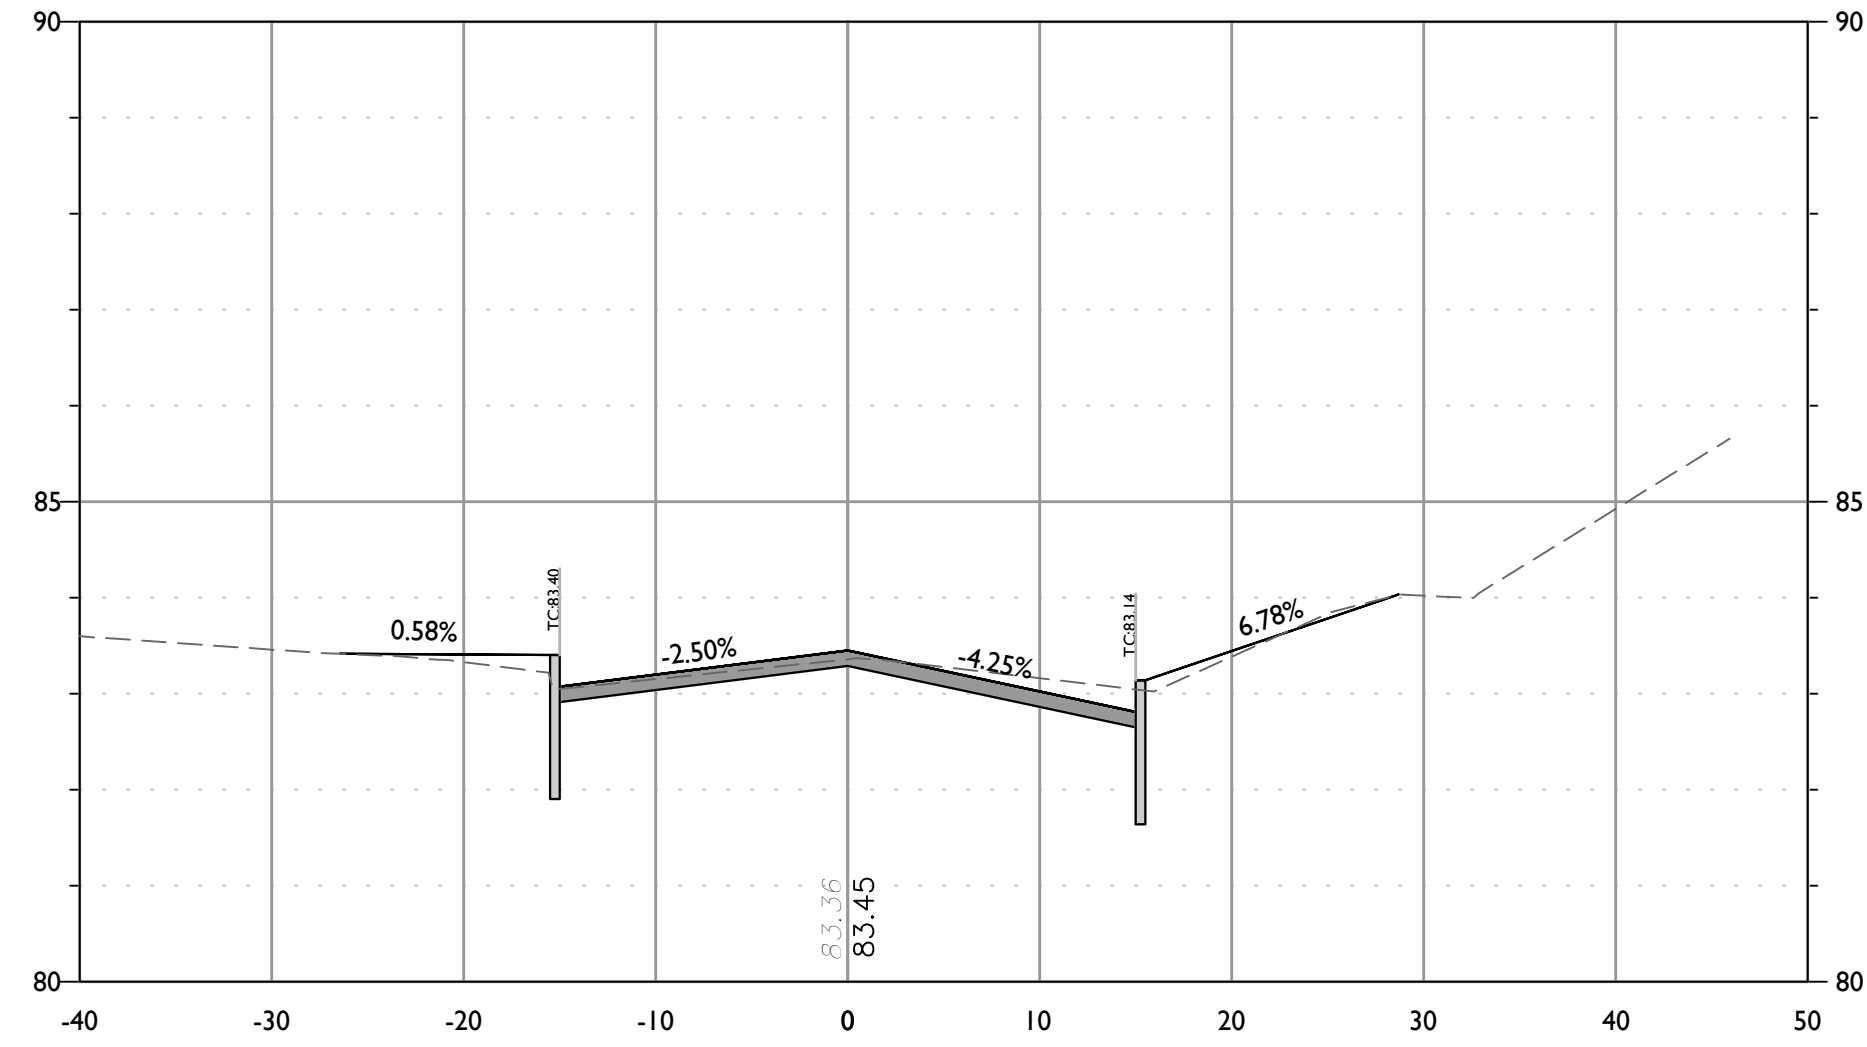


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 8+50  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

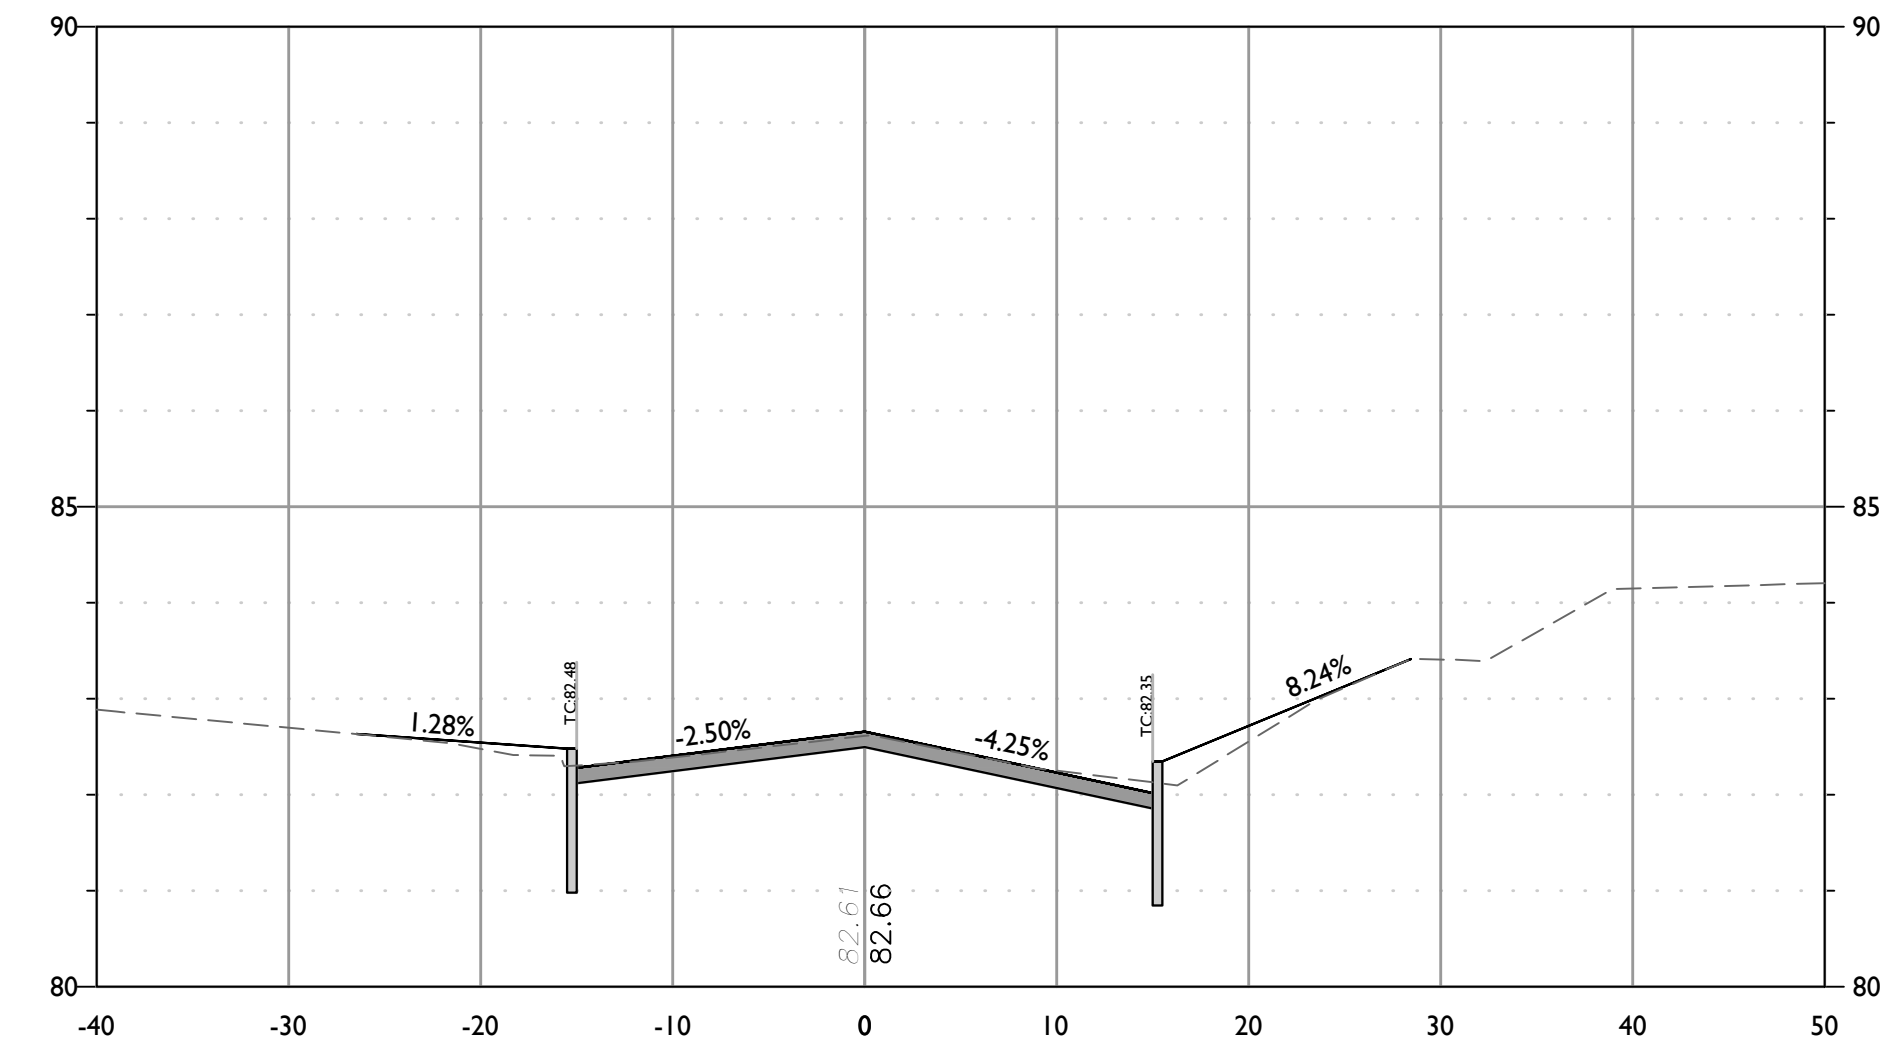


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 8+75  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

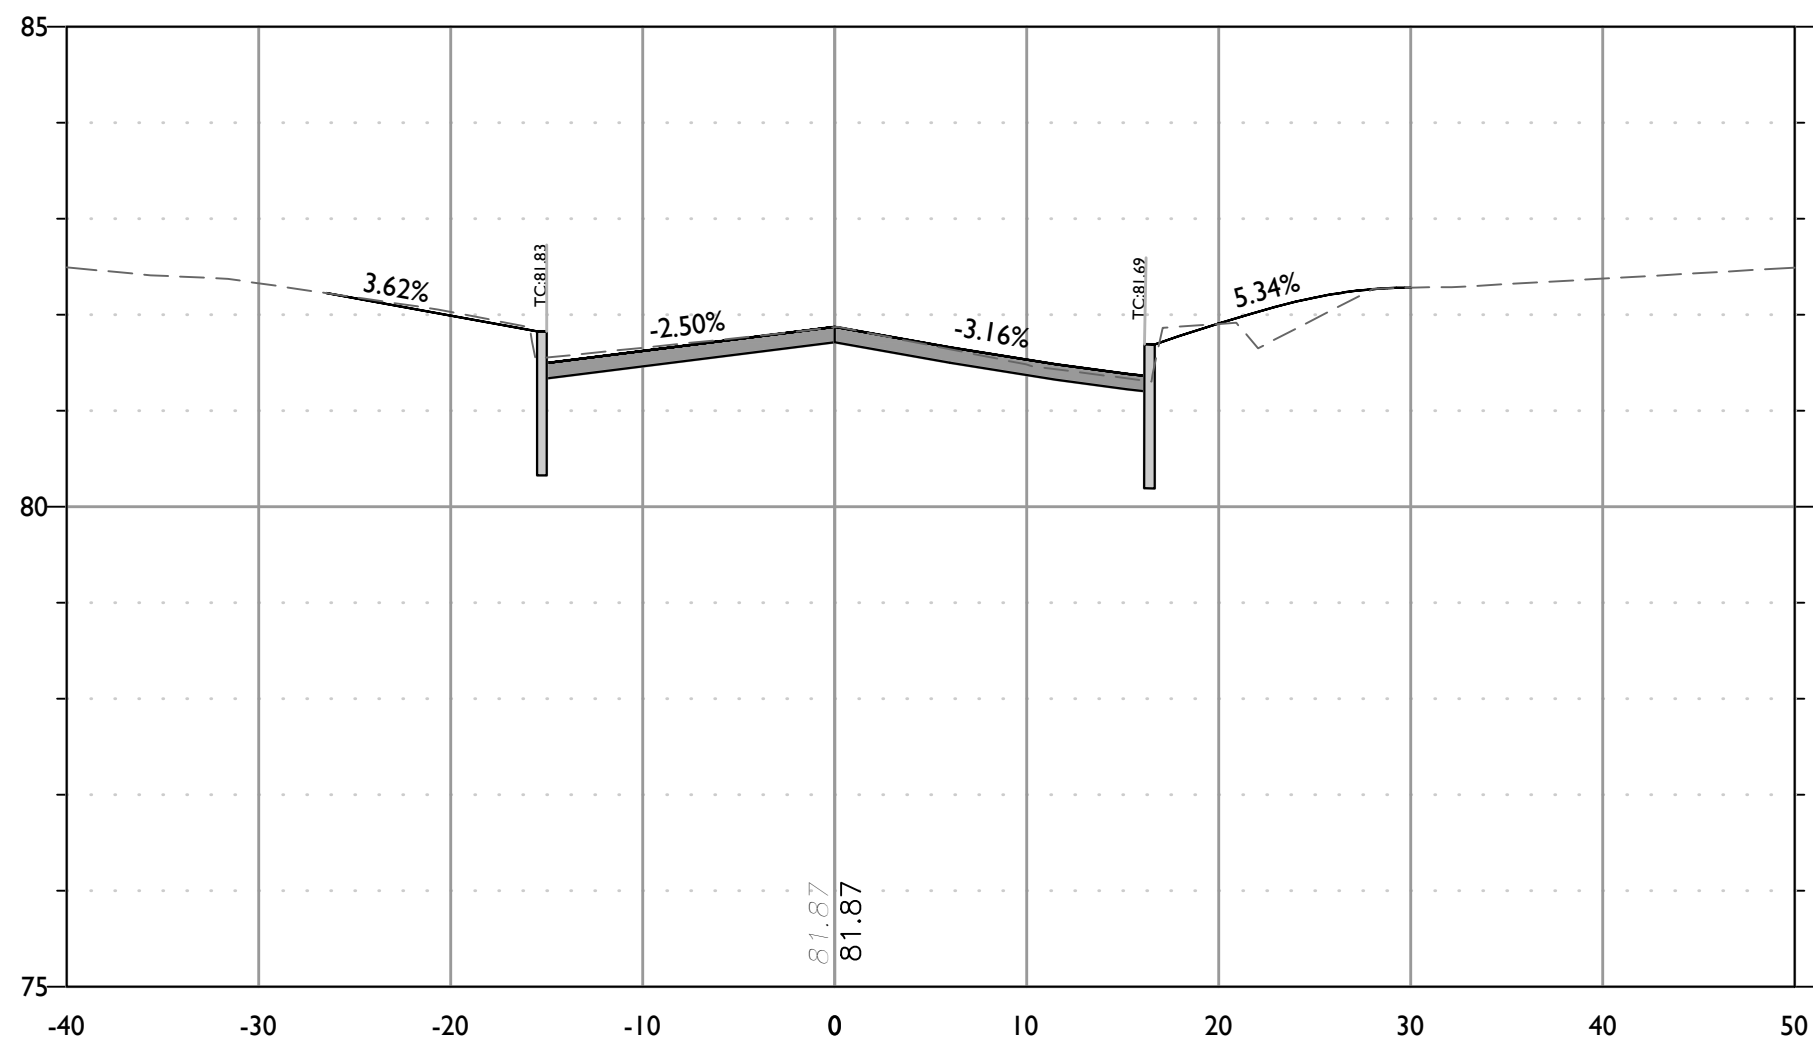


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 9+00  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

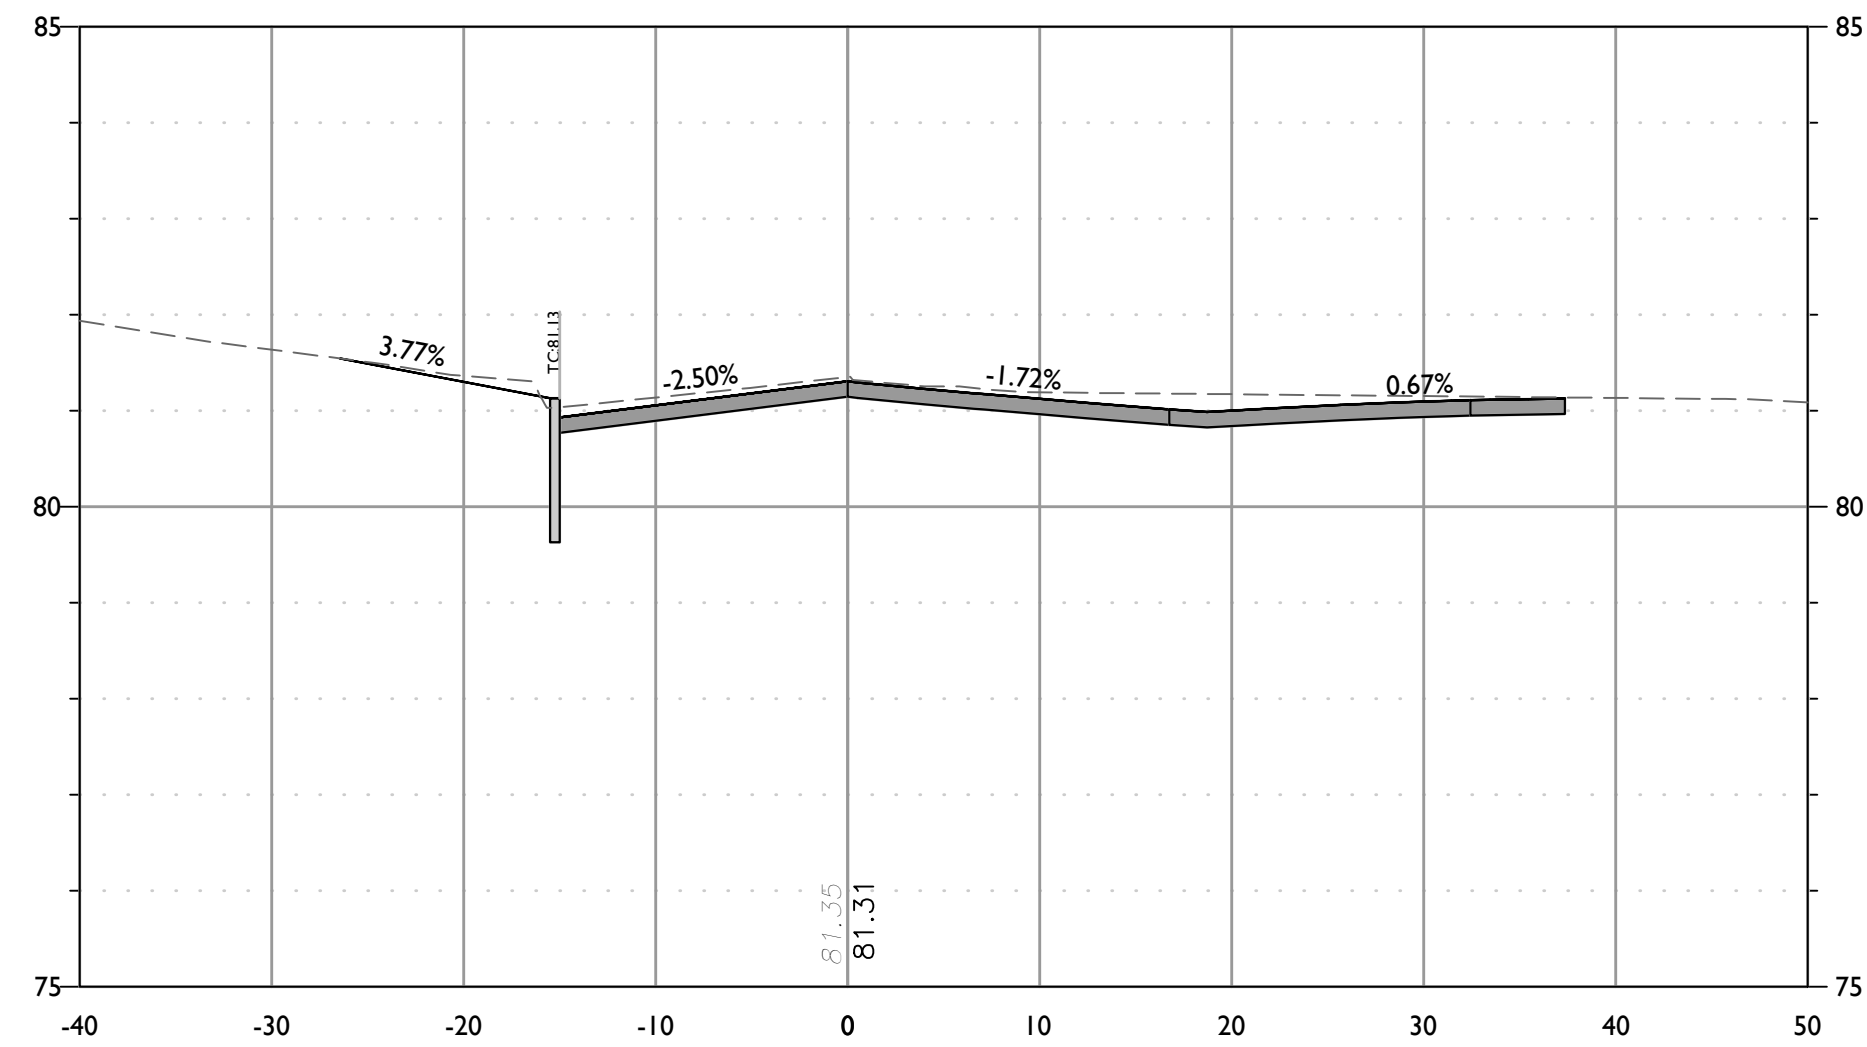


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 9+20  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

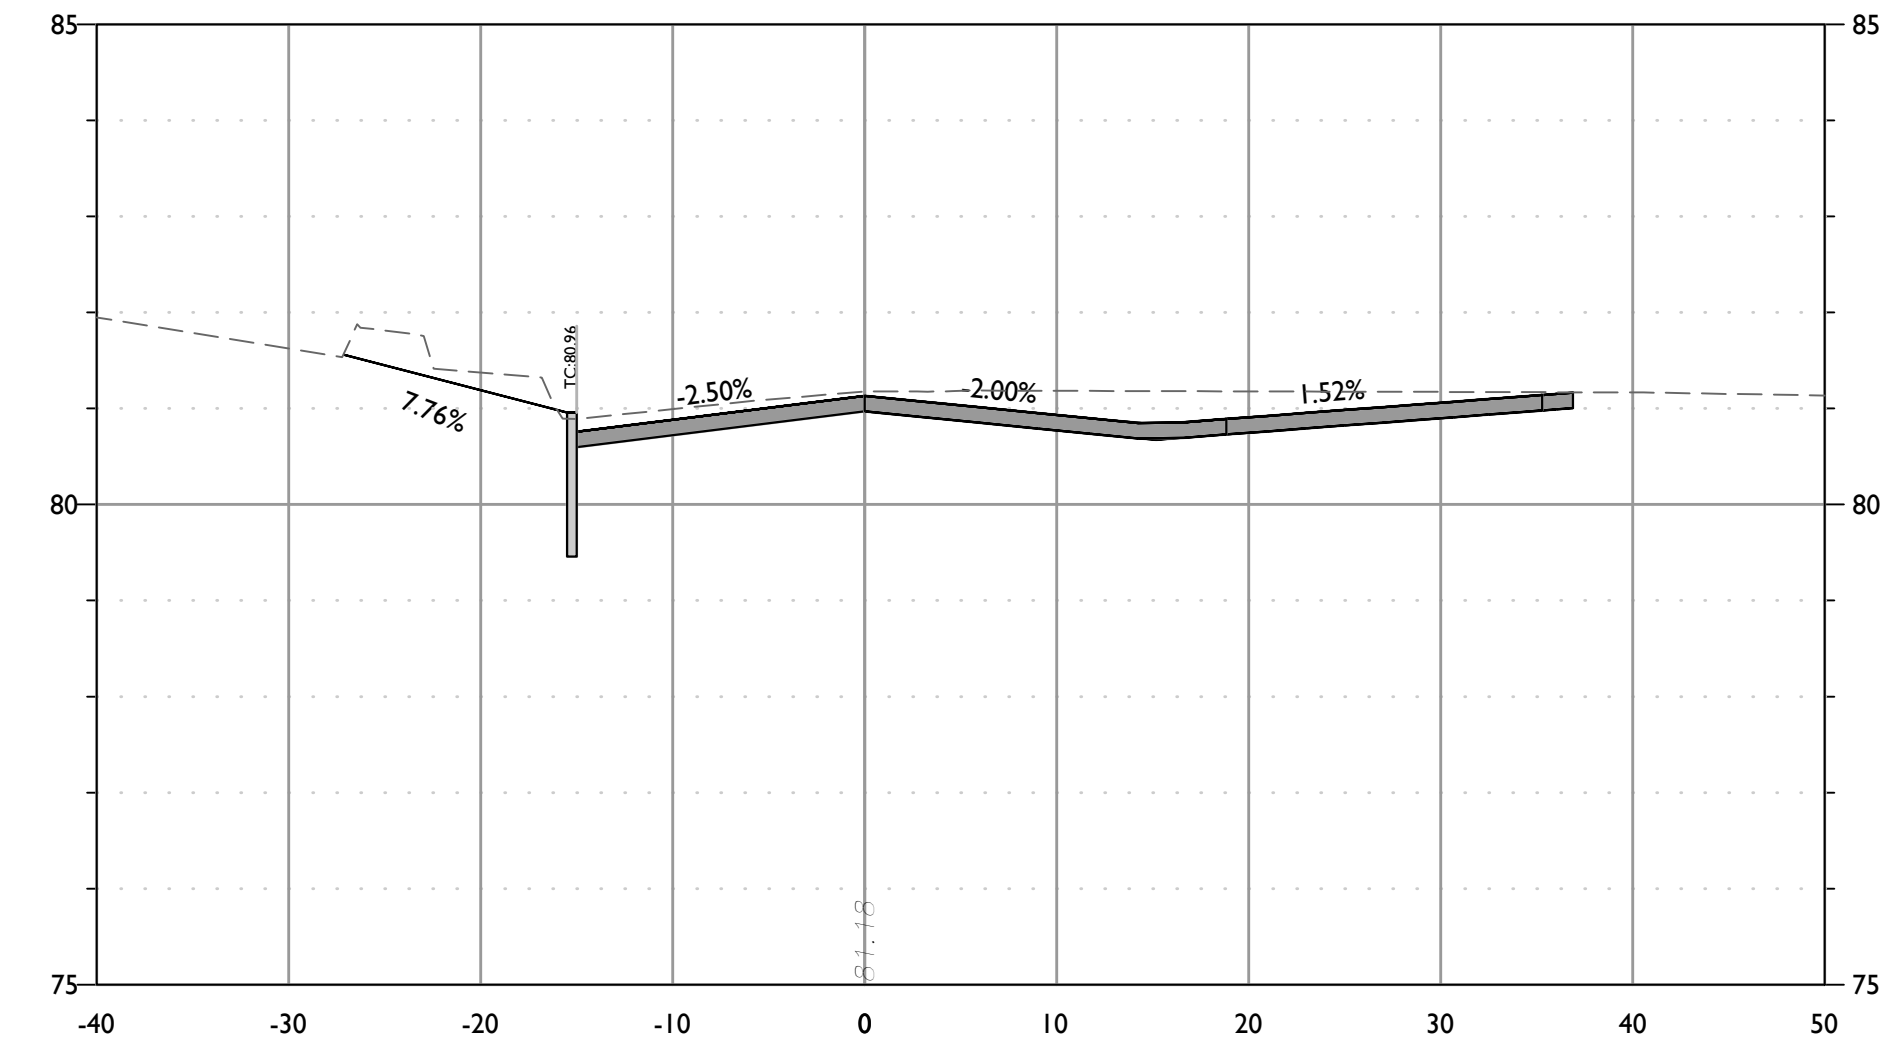


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 9+26.66  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

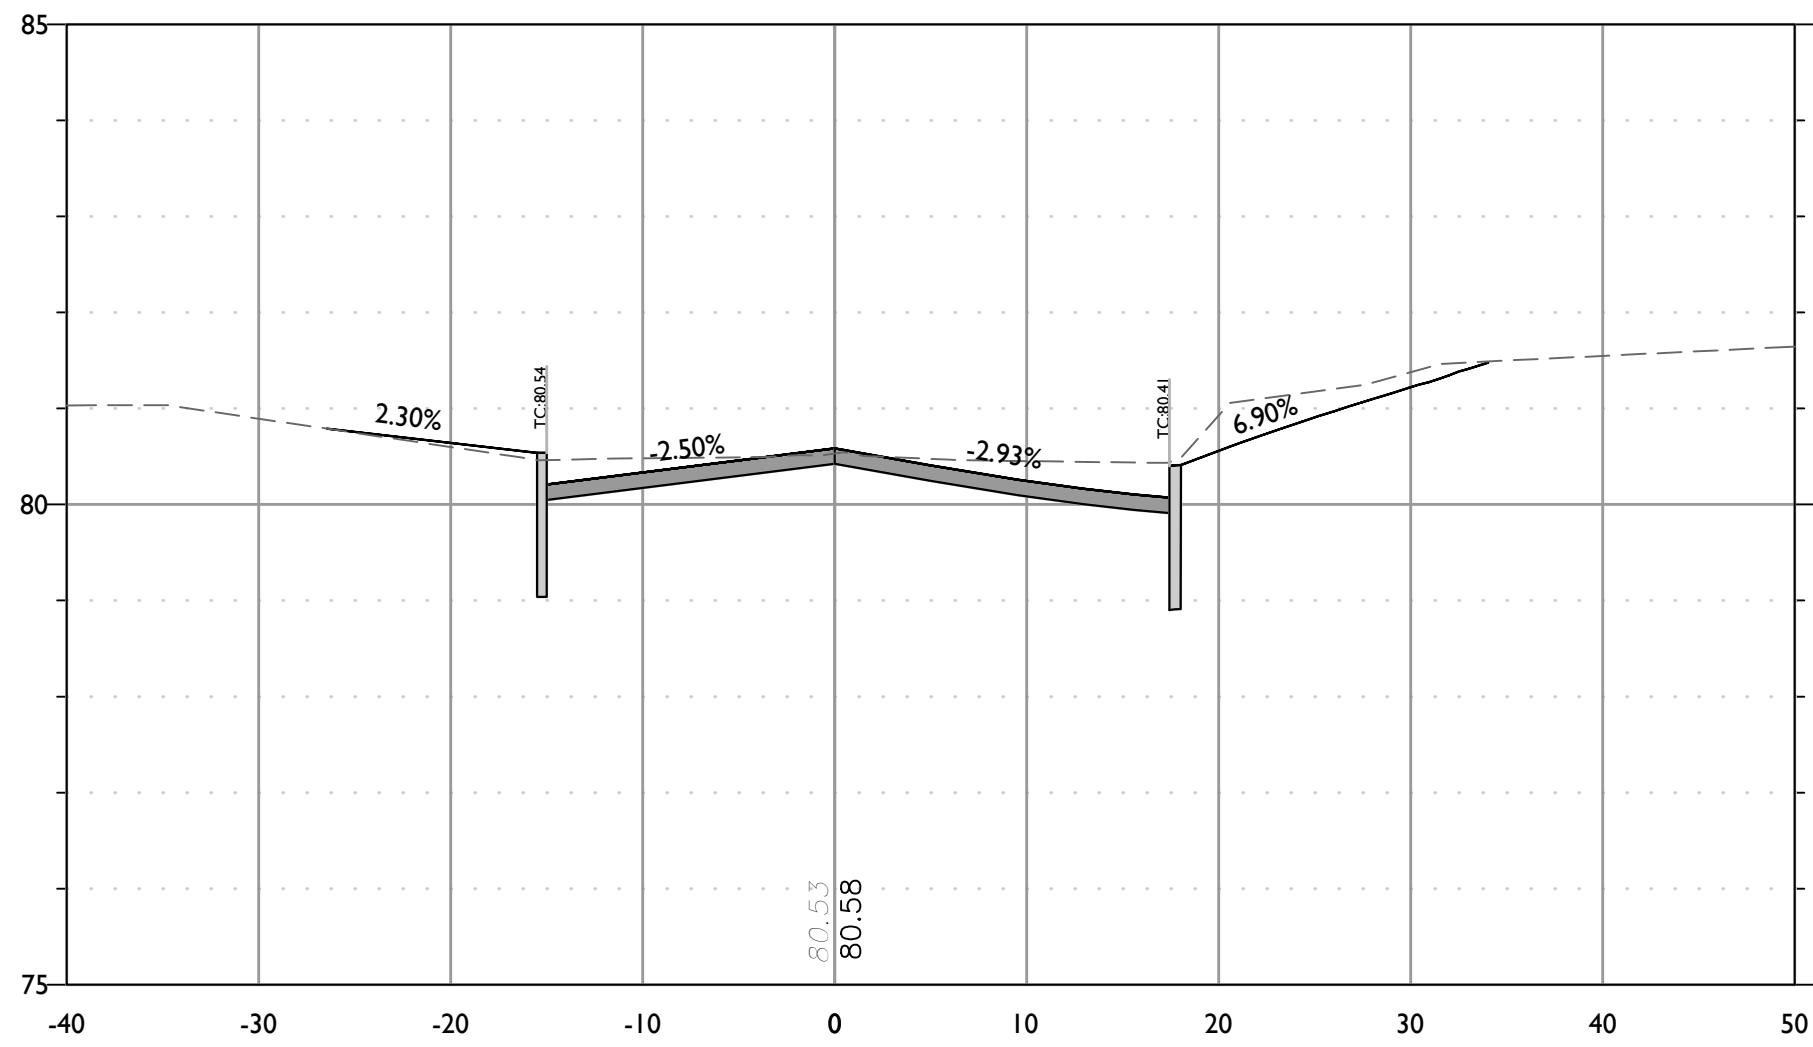

CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 9+50  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

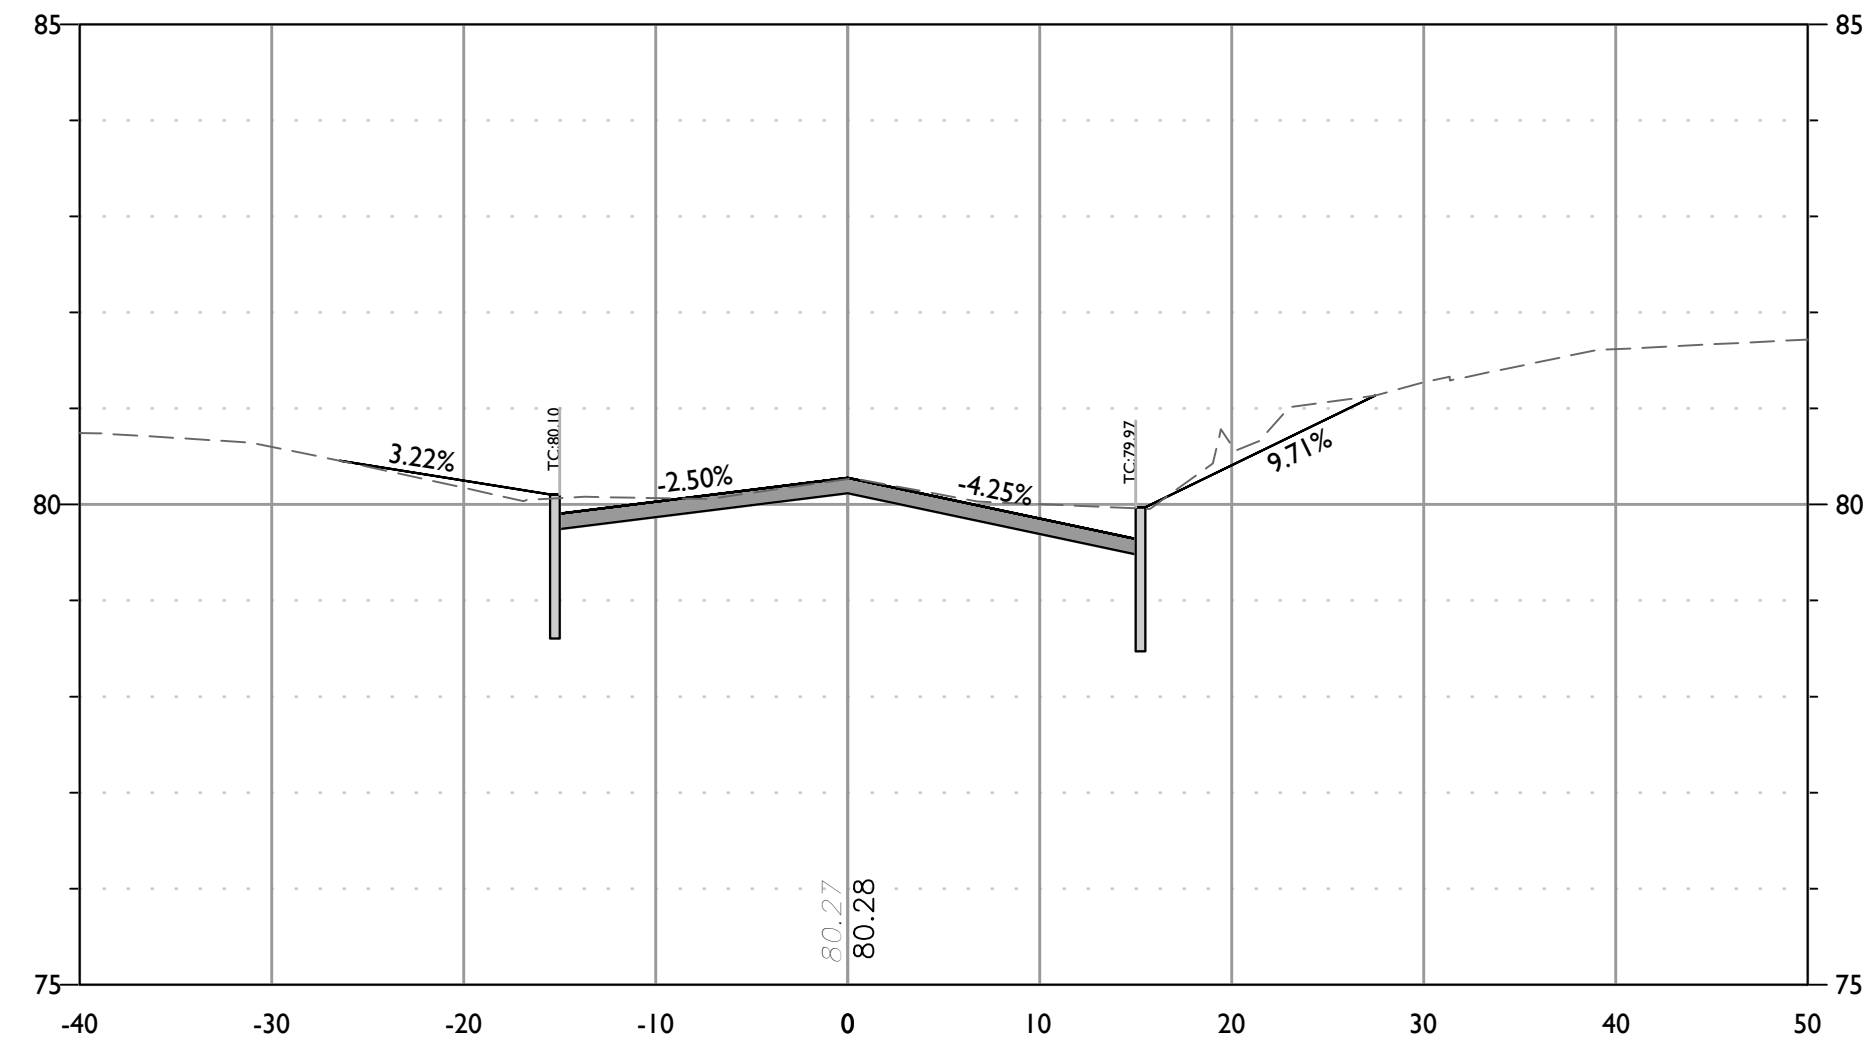

CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 9+65  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

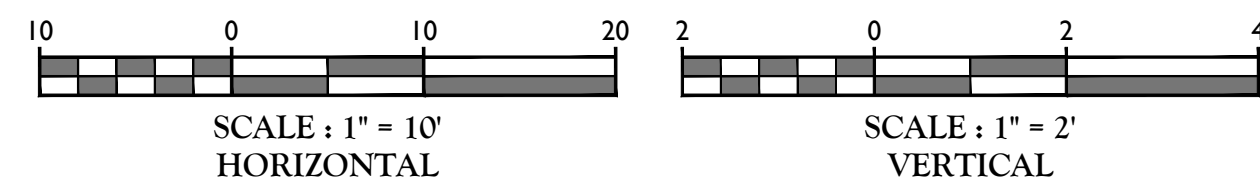

**MASER CONSULTING, P.A.**  
Customer Loyalty through Client Satisfaction  
www.maserconsulting.com  
Office Locations:  
NEW JERSEY NEW MEXICO  
NEW YORK MARYLAND  
PENNSYLVANIA GEORGIA  
VIRGINIA TEXAS  
FLORIDA TENNESSEE  
NORTH CAROLINA COLORADO  
State of NJ, C.O.A.: 24GA27986500  
Copyright © 2021, Maser Consulting, All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were constructed or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting, P.A.

**811**  
PROTECT YOURSELF  
ALL STATES REQUIRE NOTIFICATION OF EXCAVATORS, DRIVERS, OR ANY PERSON PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE  
Know what's below.  
Call before you dig.  
FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM

REV	DATE	DRAWN BY	DESCRIPTION
1	6/8/20	BAK	REVISED PER NJDOT COMMENTS
2	6/15/20	BAK	REVISED PER CURB CHANGES
3	6/17/20	BAK	REVISED FOR SCD SUBMISSION
4	7/7/20	BAK	REVISED PER SCD COMMENTS
5	3/5/21	BAK	REVISED PER TOWNSHIP COMMENTS
6	4/2/21	BAK	REVISED PER NJDOT COMMENTS
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			

*Cal P. O'Brien*  
**CARL P. O'BRIEN**  
NEW JERSEY PROFESSIONAL  
ENGINEER - LICENSE NUMBER: GE45154


CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS  
TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY

**M.T. ARLINGTON OFFICE**  
400 Valley Road  
Suite 304  
Mount Arlington, NJ 07856  
Phone: 973.398.3110  
Fax: 973.398.3199


SCALE:	DATE:	DRAWN BY:	CHECKED BY:
AS SHOWN	1/30/20	BAK	PWJ
PROJECT NUMBER:		DRAWING NAME:	
CDT065		C-LAYT	

SHEET TITLE:  
CROSS SECTIONS  
SHEET NUMBER:  
14 of 36




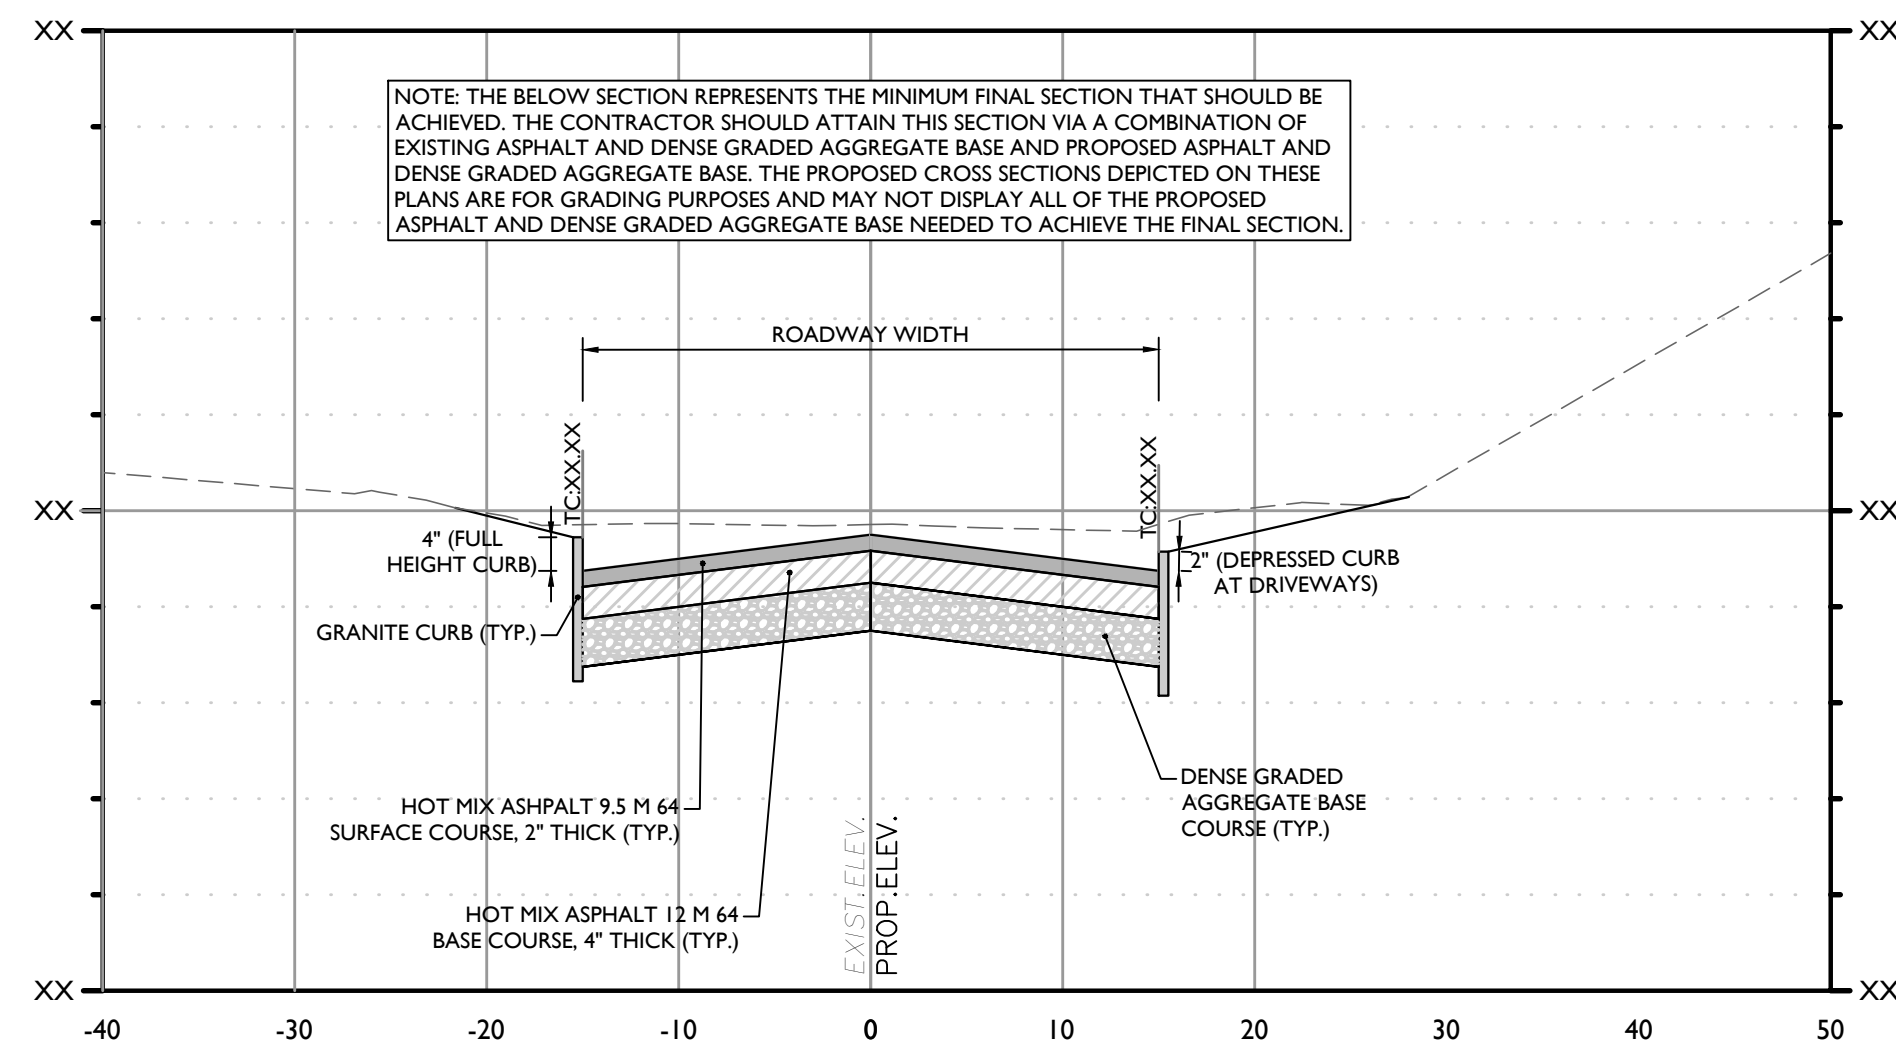


TYPICAL CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: XX+XX.XX  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

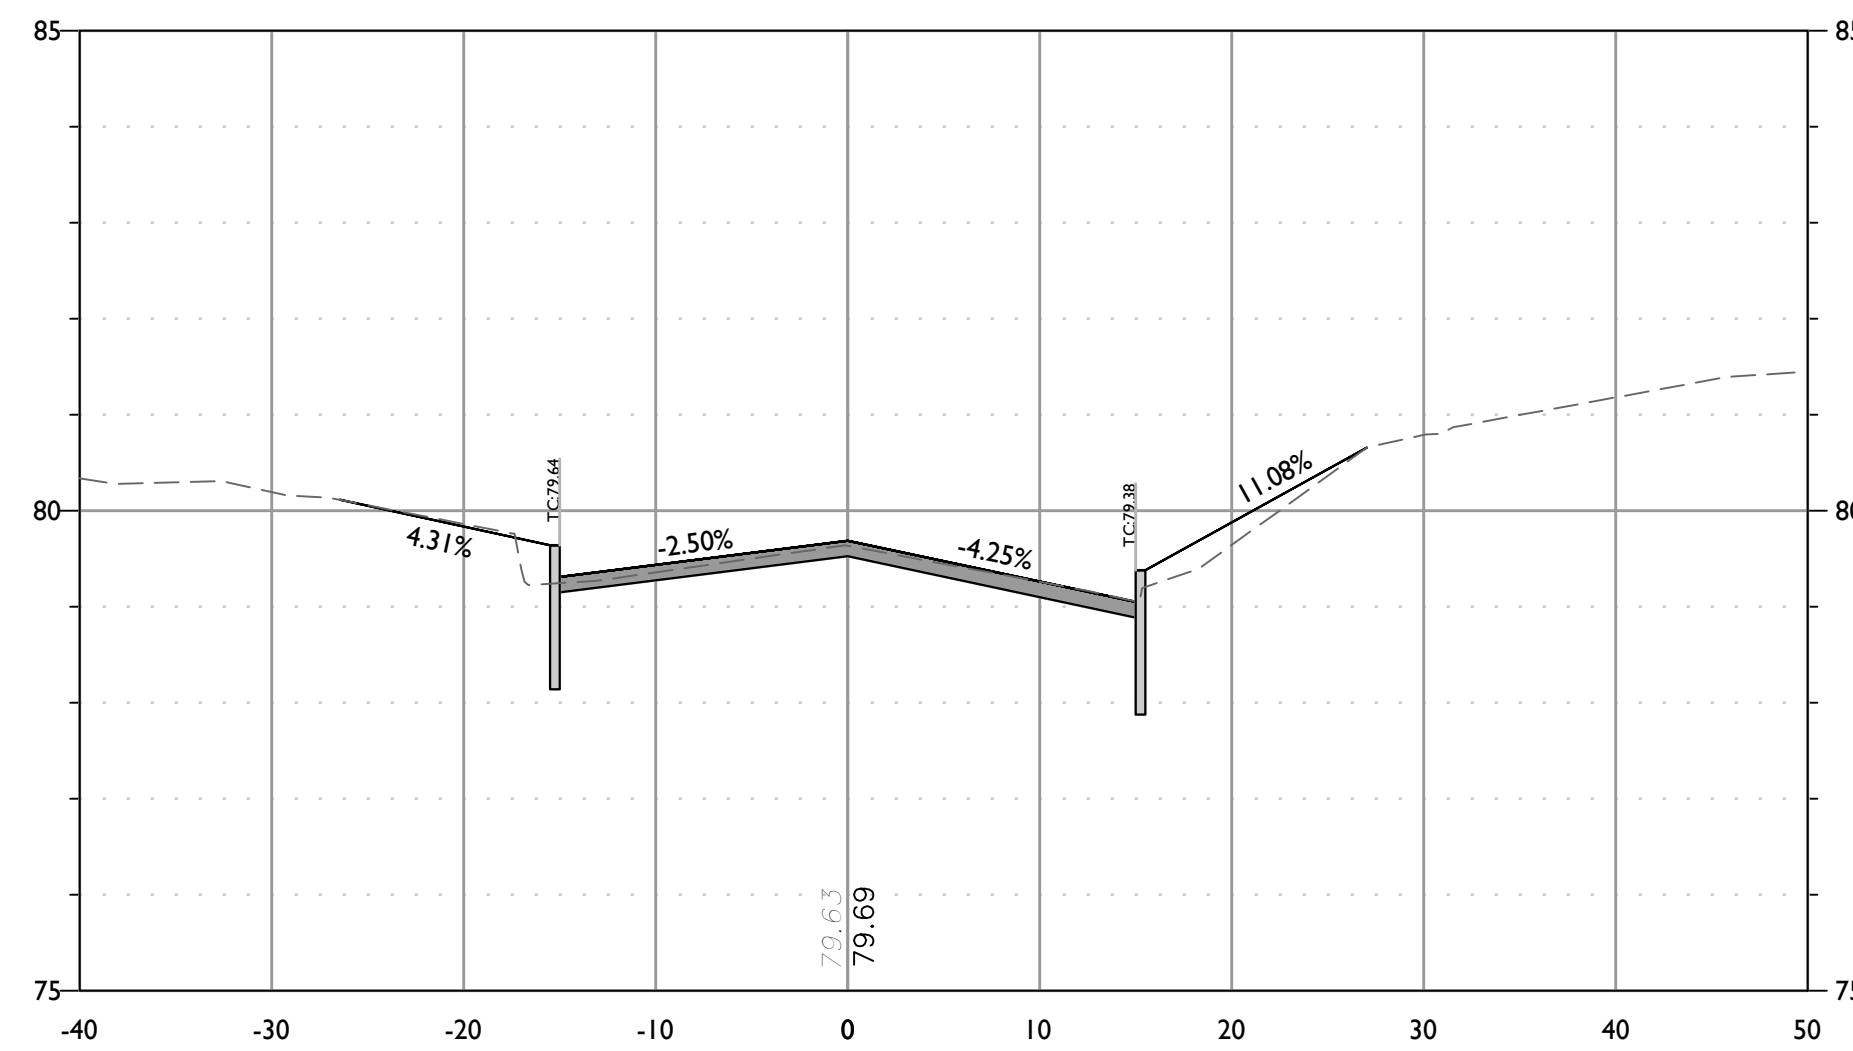


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 10+00  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

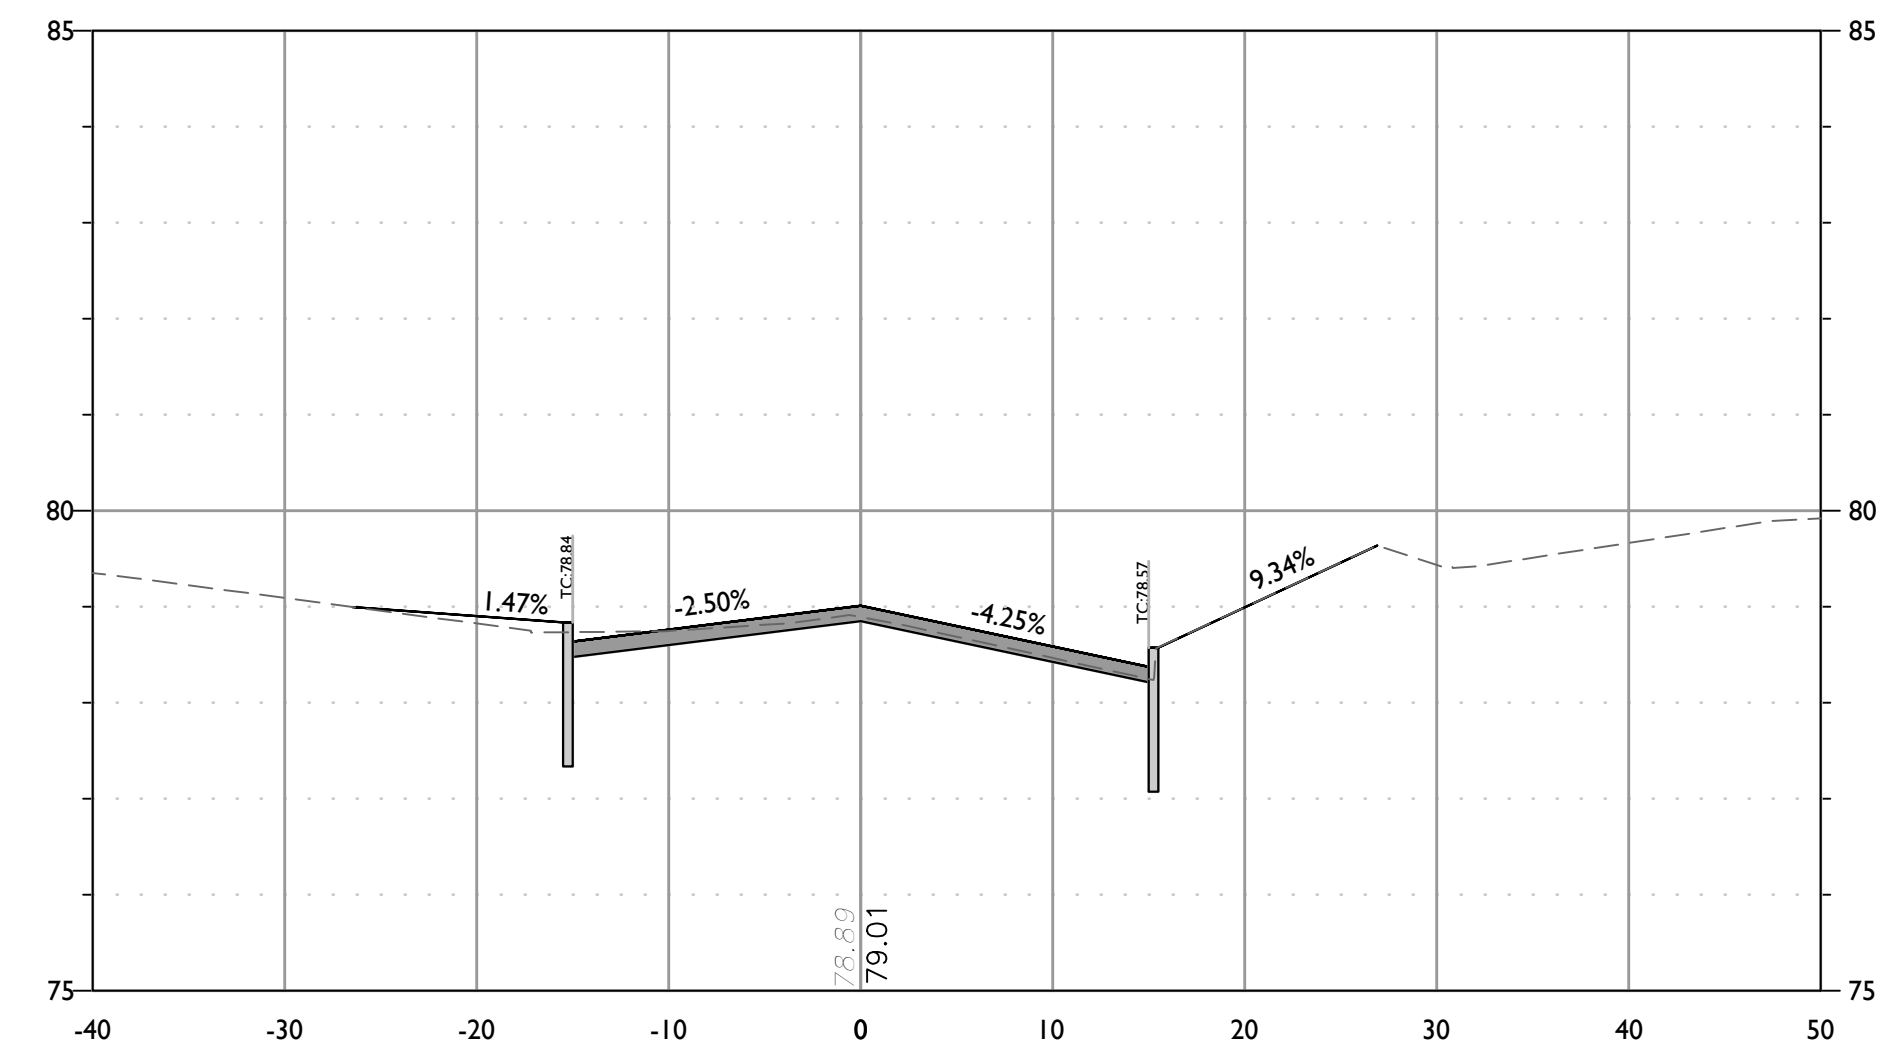


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 10+40  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

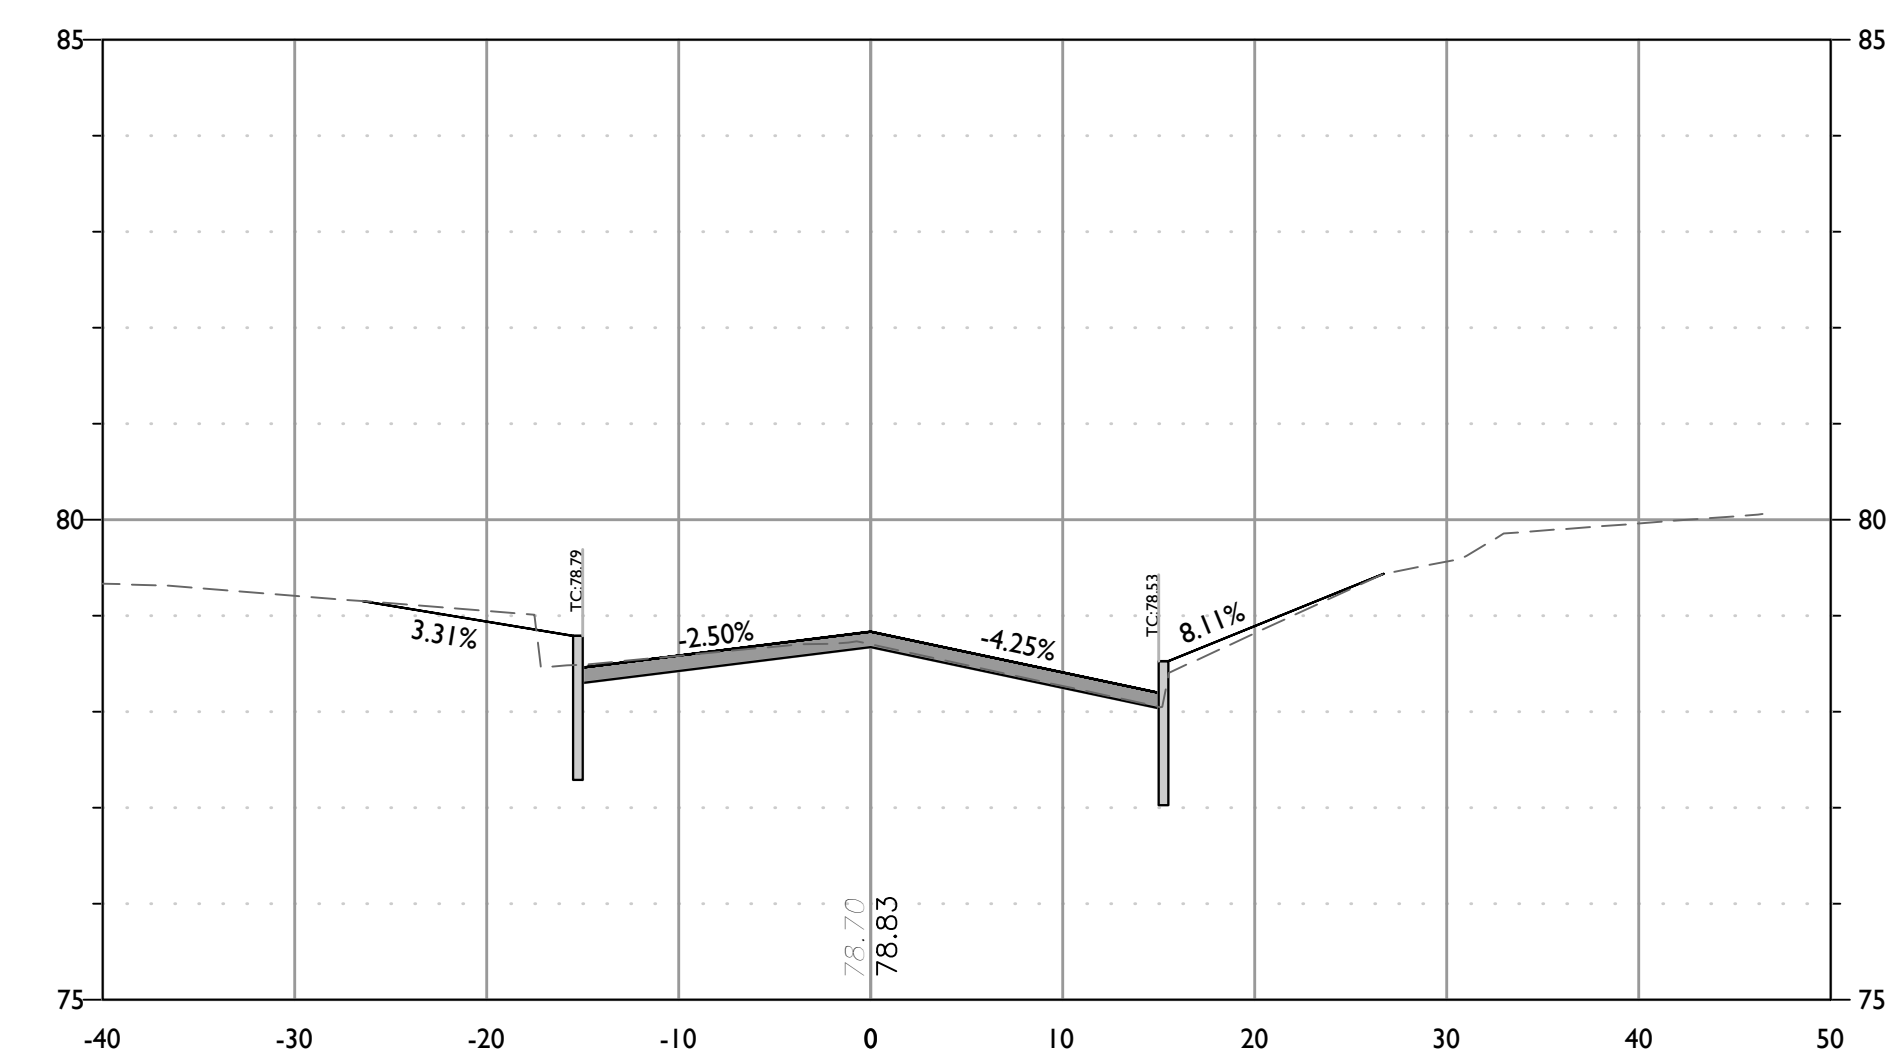


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 10+50  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

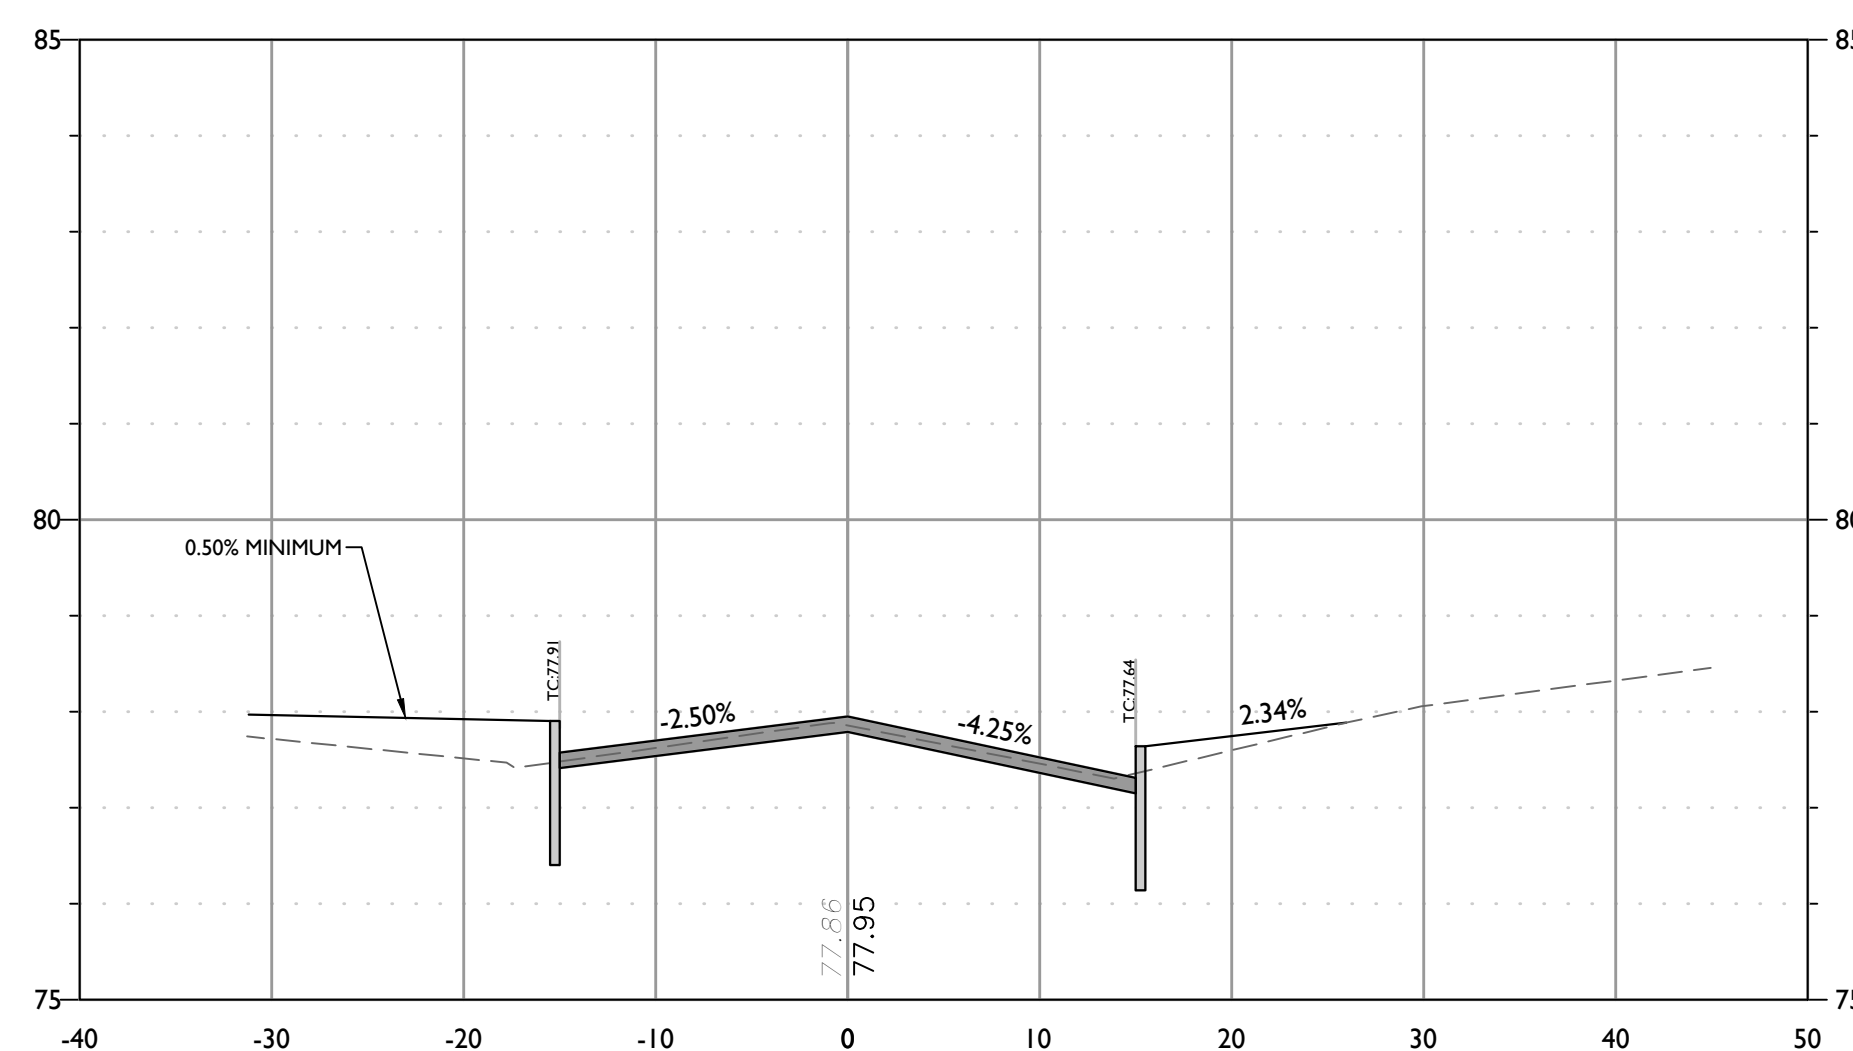


CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 11+00  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

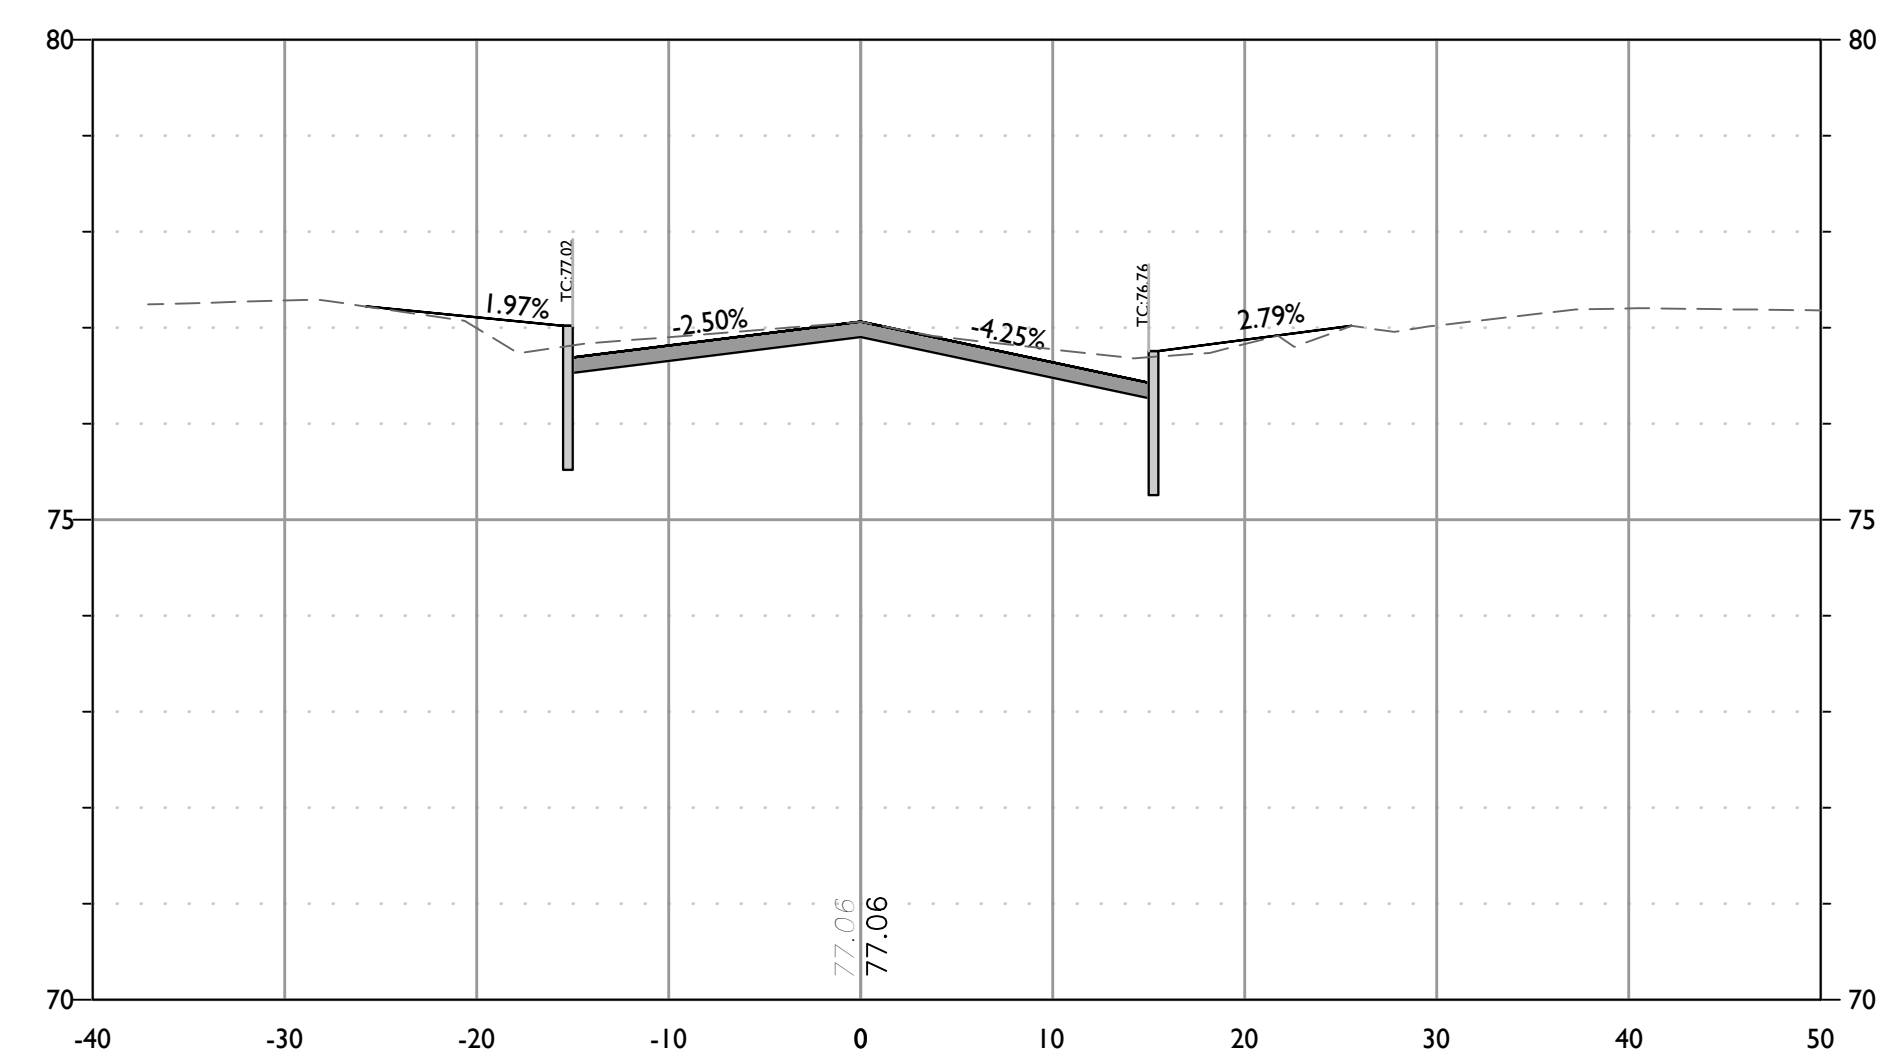

CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 11+50  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

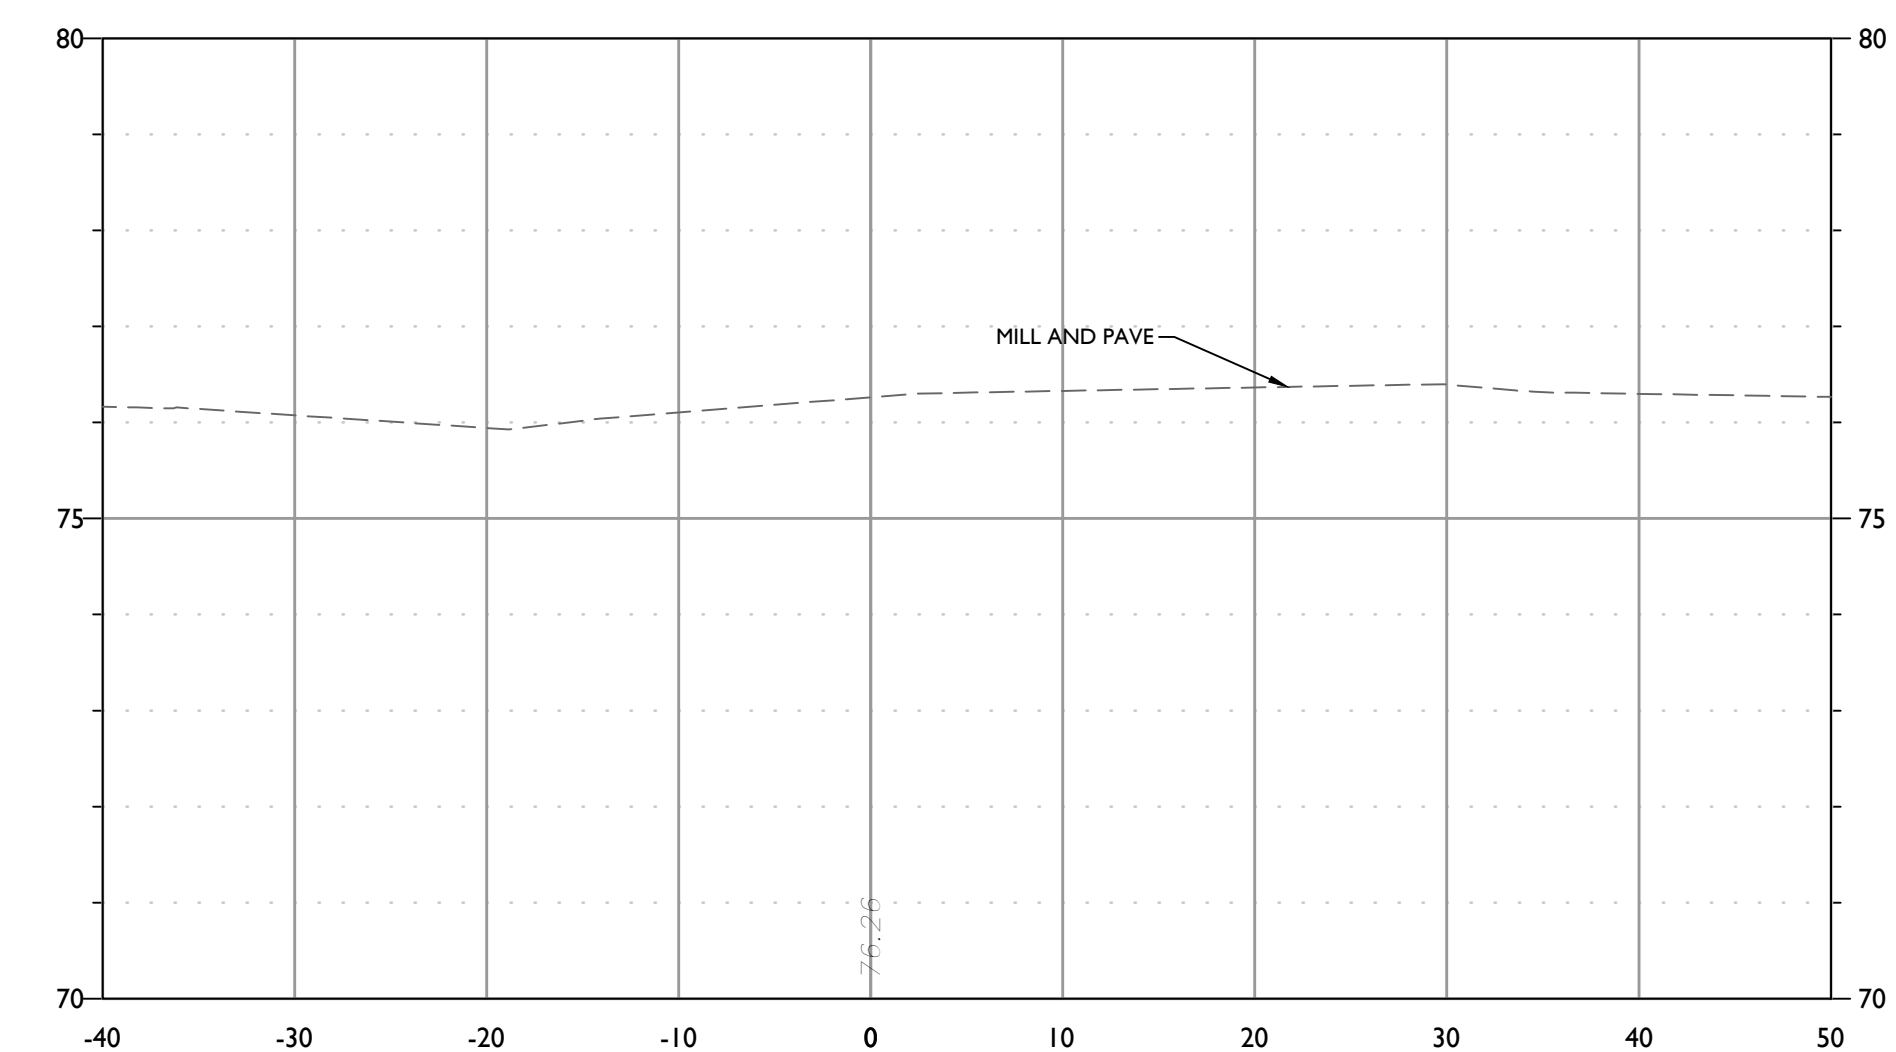

CROSS SECTION OF BROOKSIDE PLACE ALIGNMENT  
STATION: 12+00  
HORIZONTAL : 1" = 10'  
VERTICAL : 1" = 2'

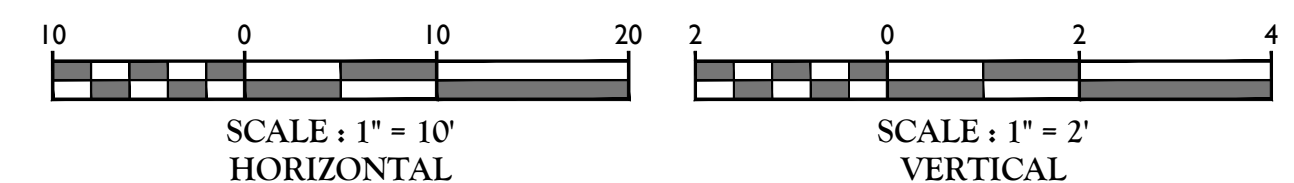



# MASER

CONSULTING P.A.

Customer Loyalty through Client Satisfaction

www.maserconsulting.com

Office Locations:

<ul style="list-style-type: none"> <li>■ NEW JERSEY</li> <li>■ NEW YORK</li> <li>■ PENNSYLVANIA</li> <li>■ VIRGINIA</li> <li>■ FLORIDA</li> <li>■ NORTH CAROLINA</li> </ul>	<ul style="list-style-type: none"> <li>■ NEW MEXICO</li> <li>■ MARYLAND</li> <li>■ GEORGIA</li> <li>■ TEXAS</li> <li>■ TENNESSEE</li> <li>■ COLORADO</li> </ul>
---	---

State of N.J. C.O.A.: 24GA27986500

Copyright © 2021, Maser Consulting All Rights Reserved. This  
 drawing and all the information contained herein is authorized for  
 use only by the party to whom it is issued. No part of this drawing or  
 information is to be copied, reproduced, stored in a retrieval system or  
 in any form is certified. This drawing may not be copied, reused,  
 disclosed, distributed or relied upon for any other purposes without  
 the express written consent of Maser Consulting, P.A.


**811**  
Know what's below.  
Call before you dig.  
FOR STATE SPECIFIC DIRECT PHONE NUMBERS  
VISIT: [WWW.CALL811.COM](http://WWW.CALL811.COM)

REV	DATE	DESCRIPTION
1	6/8/20	BAK REVISED PER NIDOT COMMENTS
2	6/15/20	BAK REVISED PER CURB CHANGES
3	6/17/20	BAK REVISED FOR SCD SUBMISSION
4	7/7/20	BAK REVISED PER SCD COMMENTS
5	3/5/21	BAK REVISED PER TOWNSHIP COMMENTS
6	4/2/21	BAK REVISED PER NIDOT COMMENTS
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

  
CARL P. O'BRIEN  
NEW JERSEY PROFESSIONAL  
ENGINEER - LICENSE NUMBER: GE45154

CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS

TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY



**MT. ARLINGTON OFFICE**  
400 Valley Road  
Suite 304  
Mount Arlington, NJ 07856  
  
Phone: 973.398.3110  
Fax: 973.398.3199

SCALE: AS SHOWN	DATE: 1/30/20	DRAWN BY: BAK	CHECKED BY: PWJ
PROJECT NUMBER: CDT065		DRAWING NAME: C-LAYT	

SHEET TITLE:

CROSS SECTIONS

SHEET NUMBER:  
15 of 36










REV	DATE	DESCRIPTION
1	6/03/20	BAC
2	6/15/20	BAC
3	6/17/20	BAC
4	7/7/20	BAC
5	3/9/21	BAC
6	4/2/21	BAC
-	-	-
-	-	-
-	-	-
-	-	-

  
CARL P. O'BRIEN  
NEW JERSEY PROFESSIONAL  
ENGINEER - LICENSE NUMBER: G45154

CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS


TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY

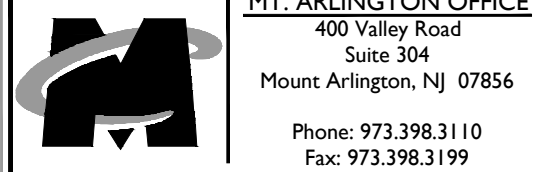

SCALE: AS SHOWN	DATE: 1/30/20	DRAWN BY: BAK	CHECKED BY: PWJ
PROJECT NUMBER: CDT065		DRAWING NAME: C-LAYT-PAVE	

FULL DEPTH  
RECONSTRUCTION MAP

SHEET NUMBER:  
17 of 36

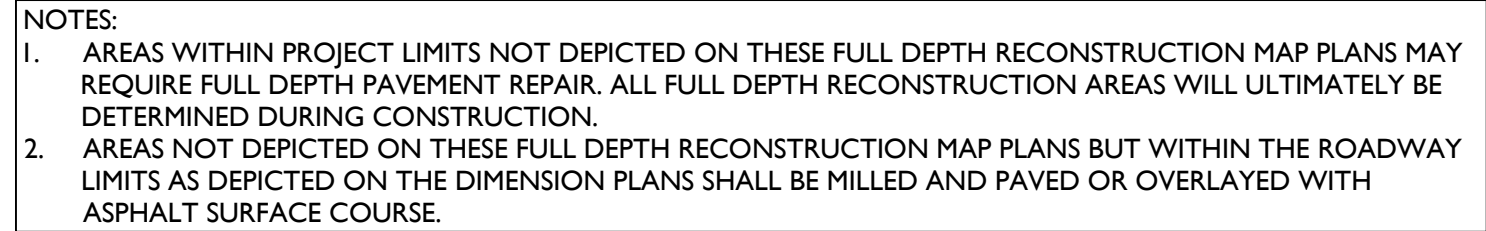



SOMERSET-UNION SOIL CONSERVATION  
DISTRICT NOTES

- MCNJ-SOIL-NOTE-1013 MOD: 07/07/20  
05/01/17
- THE SOMERSET-UNION SOIL CONSERVATION DISTRICT SHALL BE NOTIFIED IN WRITING 48 HOURS IN ADVANCE OF ANY LAND DISTURBING ACTIVITY.
  - ALL SOIL EROSION AND SEDIMENT CONTROL PRACTICES SHALL BE INSTALLED PRIOR TO ANY MAJOR SOIL DISTURBANCES OR IN THEIR PROPER SEQUENCE AND MAINTAINED UNTIL PERMANENT PROTECTION IS ESTABLISHED.
  - ANY STOCKPILE OR DISTURBED AREAS THAT WILL BE LEFT EXPOSED MORE THAN 14 DAYS AND NOT SUBJECT TO CONSTRUCTION TRAFFIC, WILL IMMEDIATELY RECEIVE A TEMPORARY SEEDING. IF THE SEASON PREVENTS THE ESTABLISHMENT OF A TEMPORARY COVER, THE DISTURBED AREAS WILL BE MULCHED WITH STRAW, OR EQUIVALENT MATERIAL, AT A RATE OF TWO (2) TONS PER ACRE, ACCORDING TO NJ STATE STANDARDS
  - PERMANENT VEGETATION SHALL BE SEEDDED OR SODDED ON ALL EXPOSED AREAS WITHIN TEN (10) DAYS AFTER FINAL GRADING. MULCH WILL BE USED FOR PROTECTION UNTIL SEEDING IS ESTABLISHED
  - ALL WORK SHALL BE DONE IN ACCORDANCE WITH THE NJ STATE STANDARDS FOR SOIL EROSION AND SEDIMENT CONTROL IN NEW JERSEY.
  - A SUB-BASE COURSE WILL BE APPLIED IMMEDIATELY FOLLOWING ROUGH GRADING AND INSTALLATION OF IMPROVEMENTS IN ORDER TO STABILIZE STREETS, ROADS, DRIVEWAYS AND PARKING AREAS. IN AREAS WHERE NO UTILITIES ARE PRESENT, THE SUB-BASE SHALL BE INSTALLED WITHIN 15 DAYS OR PRELIMINARY GRADING.
  - IMMEDIATELY FOLLOWING INITIAL DISTURBANCE OR ROUGH GRADING ALL CRITICAL AREAS SUBJECT TO EROSION (I.E. STEEP SLOPES, ROADWAY EMBANKMENTS) WILL RECEIVE A TEMPORARY SEEDING IN COMBINATION WITH STRAW MULCH OR A SUITABLE EQUIVALENT, AT A RATE OF TWO (2) TONS PER ACRE, ACCORDING TO THE NJ STATE STANDARDS.
  - ANY STEEP SLOPES RECEIVING PIPELINE INSTALLATION WILL BE BACKFILLED AND STABILIZED DAILY, AS THE INSTALLATION PROCEEDS (I.E. SLOPES GREATER THAN 3:1)
  - TRAFFIC CONTROL STANDARDS REQUIRE THE INSTALLATION OF A 5'X30'X6" PAD OF 1 1/2" OR 2" STONE, AT ALL CONSTRUCTION DRIVEWAYS, IMMEDIATELY AFTER INITIAL SITE DISTURBANCE.
  - AT THE TIME WHEN THE SITE PREPARATION FOR PERMANENT VEGETATIVE STABILIZATION IS GOING TO BE ACCOMPLISHED, ANY SOIL THAT WILL NOT PROVIDE A SUITABLE ENVIRONMENT TO SUPPORT ADEQUATE VEGETATIVE GROUND COVER, SHALL BE REMOVED OR TREATED IN SUCH A WAY THAT WILL PERMANENTLY ADJUST THE SOIL CONDITIONS AND RENDER IT SUITABLE FOR VEGETATIVE GROUND COVER. IF THE REMOVAL OR TREATMENT OF THE SOIL WILL NOT PROVIDE SUITABLE CONDITIONS, NON-VEGETATIVE MEANS OF PERMANENT GROUND STABILIZATION WILL HAVE TO BE EMPLOYED.
  - IN THAT NJS4 424-39 ET SEQ. REQUIRES THAT NO CERTIFICATE OF OCCUPANCY BE ISSUED BEFORE THE PROVISIONS OF THE CERTIFIED PLAN FOR SOIL EROSION AND SEDIMENT CONTROL HAVE BEEN COMPLIED WITH FOR PERMANENT MEASURES, ALL SITE WORK FOR SITE PLANS AND ALL WORK AROUND INDIVIDUAL LOTS IN SUBDIVISIONS, WILL HAVE TO BE COMPLETED PRIOR TO THE DISTRICT ISSUING A REPORT OF COMPLIANCE FOR THE ISSUANCE OF A CERTIFICATE OF OCCUPANCY BY THE MUNICIPALITY.
  - CONDUIT OUTLET PROTECTION MUST BE INSTALLED AT ALL REQUIRED OUTFALLS PRIOR TO THE DRAINAGE SYSTEM BECOMING OPERATIONAL.
  - ANY CHANGES TO THE CERTIFIED SOIL EROSION AND SEDIMENT CONTROL PLAN WILL REQUIRE THE SUBMISSION OF REVISED SOIL EROSION AND SEDIMENT CONTROL PLANS TO THE DISTRICT FOR RECERTIFICATION. THE REVISED PLANS MUST MEET ALL CURRENT NJ STATE SOIL EROSION & SEDIMENT CONTROL STANDARDS.
  - THE SOMERSET-UNION SOIL CONSERVATION DISTRICT SHALL BE NOTIFIED OF ANY CHANGES IN OWNERSHIP.
  - MULCHING TO THE NJ STANDARDS IS REQUIRED FOR OBTAINING A CONDITIONAL REPORT OF COMPLIANCE. CONDITIONALS ARE ONLY ISSUED WHEN THE SEASON PROHIBITS SEEDING.
  - CONTRACTOR IS RESPONSIBLE FOR KEEPING ALL ADJACENT ROADS CLEAN DURING LIFE OF CONSTRUCTION PROJECT.
  - THE DEVELOPER SHALL BE RESPONSIBLE FOR REMEDIATING ANY EROSION OR SEDIMENT PROBLEMS THAT ARISE AS A RESULT OF ONGOING CONSTRUCTION AT THE REQUEST OF THE SOMERSET-UNION SOIL CONSERVATION DISTRICT.
  - HYDRO SEEDING IS A TWO- STEP PROCESS. THE FIRST STEP INCLUDES SEED, FERTILIZER, LIPE, ETC., ALONG WITH MINIMAL AMOUNTS OF MULCH TO PROMOTE CONSISTENCY, GOOD SEED TO SOIL CONTACT, AND GIVE A VISUAL INDICATION OF COVERAGE UPON COMPLETION OF SEEDING OPERATION. HYDROMULCH SHOULD BE APPLIED AT A RATE OF 1500 LBS. PER ACRE IN SECOND STEP. THE USE OF HYDROMULCH, AS OPPOSED TO STRAW, IS LIMITED TO OPTIMUM SEEDING DATES AS LISTED IN THE NJ STANDARDS.
  - UNFILTERED DEWATERING IS NOT PERMITTED. NECESSARY PRECAUTIONS MUST BE TAKEN DURING ALL DEWATERING OPERATIONS TO MINIMIZE SOIL TRANSFER. ANY DEWATERING METHODS USED MUST BE IN ACCORDANCE WITH THE STANDARD FOR DEWATERING.
  - TOPSOIL STOCKPILE PROTECTION
    - APPLY GROUND LIMESTONE AT A RATE OF 90 LBS. PER 1000 SQ. FT.
    - APPLY FERTILIZER (10-20-10) AT A RATE 11 LBS. PER 1000 SQ. FT.
    - APPLY PERENNIAL RYEGRASS SEED AT 1 LB. PER 1000 SQ. FT. AND ANNUAL RYEGRASS SEED AT 1 LB. PER 1000 SQ. FT.
    - MULCH STOCKPILE WITH STRAW OR HAY AT A RATE OF 90 LBS. PER 1000 SQ. FT.
    - APPLY A LIQUID MULCH BINDER OR TACK TO STRAW OR HAY MULCH.
    - PROPERLY ENTRENCH A SILT FENCE AT THE BOTTOM OF THE STOCKPILE.
  - TEMPORARY STABILIZATION SPECIFICATIONS
    - APPLY GROUND LIMESTONE AT A RATE OF 90 LBS. PER 1000 SQ. FT.
    - APPLY FERTILIZER (10-20-10) AT A RATE 11 LBS. PER 1000 SQ. FT.
    - APPLY PERENNIAL RYEGRASS SEED AT 1 LB. PER 1000 SQ. FT. AND ANNUAL RYEGRASS SEED AT 1 LB. PER 1000 SQ. FT.
    - MULCH STOCKPILE WITH STRAW OR HAY AT A RATE OF 90 LBS. PER 1000 SQ. FT.
    - APPLY A LIQUID MULCH BINDER OR TACK TO STRAW OR HAY MULCH.
  - PERMANENT STABILIZATION SPECIFICATIONS
    - APPLY TOPSOIL TO A DEPTH OF 5-INCHES (UNSETTLED)
    - APPLY GROUND LIMESTONE AT A RATE OF 90 LBS. PER 1000 SQ. FT.
    - APPLY FERTILIZER (10-20-10) AT A RATE 11 LBS. PER 1000 SQ. FT.
    - APPLY PERENNIAL RYEGRASS SEED AT 1 LB. PER 1000 SQ. FT. AND ANNUAL RYEGRASS SEED AT 1 LB. PER 1000 SQ. FT.
    - MULCH STOCKPILE WITH STRAW OR HAY AT A RATE OF 90 LBS. PER 1000 SQ. FT.
    - APPLY A LIQUID MULCH BINDER OR TACK TO STRAW OR HAY MULCH.
- NOTE: 72 HOURS PRIOR TO ANY SOIL DISTURBANCE, NOTICE IN WRITING, SHALL BE GIVEN TO THE UNION COUNTY SOIL CONSERVATION DISTRICT AND A PRE-CONSTRUCTION MEETING HELD.

PERMANENT SEEDING SPECIFICATIONS

- SITE PREPARATION
  - INSTALL EROSION CONTROL MEASURES AND FACILITIES SUCH AS SILT FENCE, DIVERSIONS, SEDIMENT BASINS, CHANNEL, STABILIZATION, ETC. SEE STANDARDS 11 THROUGH 42.
  - GRADE AS NEEDED AND FEASIBLE TO PERMIT THE USE OF CONVENTIONAL EQUIPMENT FOR SEEDBED PREPARATION, SEEDING, MULCH APPLICATION, MULCH ANCHORING AND MAINTENANCE. ALL GRADING SHOULD BE DONE IN ACCORDANCE WITH THE STANDARD FOR LAND GRADING.
- SEEDBED PREPARATION
  - APPLY A UNIFORM 5 INCHES (UNSETTLED) OF TOPSOIL IN ACCORDANCE WITH THE STANDARD FOR TOPSOILING OVER ALL DISTURBED AREAS. SOILS WITH A PH OF 4.0 OR LESS OR CONTAINING IRON SULFIDE SHALL BE COVERED WITH A MINIMUM DEPTH OF 12 INCHES OF SOIL HAVING PH OF 5.0 OR MORE IN ACCORDANCE WITH THE STANDARD FOR MANAGEMENT OF HIGH ACID PRODUCING SOIL.
  - TOPSOIL SHOULD BE HANDLED ONLY WHEN DRY ENOUGH TO WORK WITHOUT DAMAGING SOIL STRUCTURE.
  - APPLY GROUND LIMESTONE AND FERTILIZER ACCORDING TO SOIL TEST RECOMMENDATIONS SUCH AS OFFERED BY RUTGERS CO-OPERATIVE EXTENSION. SOIL SAMPLE MAILERS ARE AVAILABLE FROM THE LOCAL RUTGERS COOPERATIVE EXTENSION OFFICES. FERTILIZER SHALL BE APPLIED AT THE RATE OF 500 POUNDS PER ACRE OR 11 POUNDS PER 1,000 SQUARE FEET OF 10-20-10 OR EQUIVALENT WITH 50% WATER INSOLUBLE NITROGEN UNLESS A SOIL TEST INDICATES OTHERWISE. APPLY LIMESTONE IN ACCORDANCE WITH THE TABLE BELOW AND THE RESULTS OF SOIL TESTING. CALCIUM CARBONATE IS THE EQUIVALENT AND STANDARD FOR MEASURING THE ABILITY OF LIMING MATERIALS TO NEUTRALIZE SOIL ACIDITY AND SUPPLY CALCIUM AND MAGNESIUM TO GRASSES AND LEGUMES. THE TABLE BELOW IS A GENERAL GUIDELINE FOR LIMESTONE APPLICATION RATES.

LIMESTONE APPLICATION RATE BY SOIL TEXTURE	SOIL TEXTURE	TONS/ACRE	LBS/1,000 SQ. FT.
CLAY, CLAY LOAM, AND HIGH ORGANIC SOIL	3	135	
SANDY LOAM, LOAM, SILT LOAM	2	90	
LOAMY SAND, SAND	1	45	
  - IMMEDIATELY PRIOR TO SEEDING AND TOPSOIL APPLICATION, THE SURFACE SHOULD BE SCARIFIED 6" TO 12" WHERE THERE HAS BEEN SOIL COMPACTION. THIS PRACTICE IS PERMISSIBLE ONLY WHERE THERE IS NO DANGER TO UNDERGROUND UTILITIES (CABLES, IRRIGATION SYSTEMS, ETC.)
  - WORK LINE AND FERTILIZER INTO THE SOIL TO A DEPTH OF APPROXIMATELY 4 INCHES. THE FINAL HARROWING OR DISC OPERATION SHOULD BE ON THE GENERAL CONTOUR. CONTINUE TILLAGE UNTIL A REASONABLY UNIFORM SEEDBED IS PREPARED.
  - REMOVE FROM THE SURFACE ALL STONES 2 INCHES OR LARGER IN ANY DIMENSION AND OTHER DEBRIS SUCH AS WIRE, TREE ROOTS, PIECES OF CONCRETE, CLODS LUMPS OR OTHER UNSUITABLE MATERIAL.
- SEEDING
  - SELECT THE SEED MIXTURE AS SPECIFIED ON THIS SHEET AND APPLY AS NOTED WITHIN THE DATES SPECIFIED IN THE STANDARD.
  - CONVENTIONAL SEEDING IS PERFORMED BY APPLYING SEED UNIFORMLY BY HAND, CYCLONE (CENTRIFUGAL) SEEDER, DROP SEEDER, DRILL OR CULTIPACKER SEEDER. EXCEPT FOR DRILLED, HYDROSEEDER OR CULTIPACKED SEEDINGS, SEED SHALL BE INCORPORATED INTO THE SOIL WITHIN 24 HOURS OF SEEDBED PREPARATION TO A DEPTH OF 1/4 TO 1/2 INCH, BY RAKING OR DRAGGING. DEPTH OF SEED PLACEMENT MAY BE 1/4 INCH DEEPER ON COARSE TEXTURED SOIL.
  - HYDROSEEDING IS A BROADCAST SEEDING METHOD USUALLY INVOLVING A TRUCK OR TRAILER MOUNTED TANK, WITH AN AGITATION SYSTEM AND MOUNTED TANK, WITH AN AGITATION SYSTEM AND HYDRAULIC PUMP FOR MIXING SEED, WATER AND FERTILIZER AND SPRAYING THE MIX ONTO THE PREPARED SEEDBED. MULCH SHALL NOT BE INCLUDED IN THE TANK WITH SEED. SHORT FIBERED MULCH MAY BE APPLIED WITH A HYDROSEDER FOLLOWING SEEDING. (ALSO SEE SECTION 4 MULCHING BELOW) HYDROSEEDING IS NOT A PREFERRED SEEDING METHOD BECAUSE SEED AND FERTILIZER ARE APPLIED TO THE SURFACE AND NOT INCORPORATED INTO THE SOIL. POOR SEED TO SOIL CONTACT OCCURS REDUCING SEED GERMINATION AND GROWTH. HYDROSEEDING MAY BE USED FOR AREAS TOO STEEP FOR CONVENTIONAL EQUIPMENT TO TRAVERSE OR TOO OBSTRUCTED WITH ROCKS, STUMPS, ETC.
  - AFTER SEEDING, FIRING THE SOIL WITH A CORRUGATED ROLLER WILL ASSURE GOOD SEED-TO-SOIL CONTACT, RESTORE CAPILLARITY AND IMPROVE SEEDLING EMERGENCE. THIS IS THE PREFERRED METHOD. WHEN PERFORMED ON THE CONTOUR, SHEET EROSION WILL BE MINIMIZED AND WATER CONSERVATION ON SITE WILL BE MAXIMIZED.
- MULCHING
  - MULCHING IS REQUIRED ON ALL SEEDING.
  - STRAW OR HAY - UNROTTED SMALL GRAIN STRAW, HAY FREE OF SEEDS, OR OR SALT HAY TO BE APPLIED AT THE RATE OF 1-1/2 TO 2 TONS PER ACRE (70 TO 90 POUNDS PER 1,000 SQUARE FEET), EXCEPT THAT WHERE A CRIMPER IS USED INSTEAD OF A LIQUID MULCH-BINDER (TACKIFYING OR ADHESIVE AGENT), THE RATE OF APPLICATION IS 3 TONS PER ACRE. MULCH CHOPPER-BLOWERS MUST NOT GRIND THE MULCH. HAY MULCH IS NOT RECOMMENDED FOR ESTABLISHING FINE TURF OR LAWNS DUE TO THE PRESENCE OF WEED SEED. STRAW OR HAY MULCH MUST BE ANCHORED IMMEDIATELY AFTER PLACEMENT USING PEG AND TWINE, MULCH NETTING, MECHANICAL CRIMPER OR LIQUID MULCH BINDERS IN ACCORDANCE WITH THE STANDARD.
  - WOOD-FIBER OR PAPER-FIBER MULCH - SHALL BE MADE FROM WOOD, PLANT FIBERS OR PAPER CONTAINING NO GROWTH OR GERMINATION INHIBITING MATERIALS. USED AT THE RATE OF 1,500 POUNDS PER ACRE (OR AS RECOMMENDED BY THE PRODUCT MANUFACTURER) AND MAY BE APPLIED BY A HYDROSEDER. THIS MULCH SHALL NOT BE MIXED IN THE TANK WITH SEED. USE IS LIMITED TO FLATTER SLOPES AND DURING OPTIMUM SEEDING PERIODS IN SPRING AND FALL.

DUST CONTROL NOTES

THE FOLLOWING METHODS SHOULD BE CONSIDERED FOR CONTROLLING DUST:

MULCHES

SEE STANDARD FOR STABILIZATION WITH MULCHES ONLY. (PAGE 5-1 OF "STANDARDS FOR SOIL EROSION AND SEDIMENT CONTROL IN NEW JERSEY", LATEST EDITION)

VEGETATIVE COVER

SEE STANDARD FOR TEMPORARY VEGETATIVE COVER (PAGE 7-1 OF "STANDARDS FOR SOIL EROSION AND SEDIMENT CONTROL IN NEW JERSEY", LATEST EDITION), PERMANENT VEGETATIVE COVER FOR SOIL STABILIZATION (PAGE 4-1 OF "STANDARDS FOR SOIL EROSION AND SEDIMENT CONTROL IN NEW JERSEY", LATEST EDITION), AND PERMANENT STABILIZATION WITH SOD (PAGE 6-1 OF "STANDARDS FOR SOIL EROSION AND SEDIMENT CONTROL IN NEW JERSEY", LATEST EDITION).

SPRAY-ON ADHESIVES

ON MINERAL SOILS (NOT EFFECTIVE ON MUCK SOILS). KEEP TRAFFIC OFF THESE AREAS.

TABLE 16-1: DUST CONTROL MATERIALS			
MATERIAL	WATER DILUTION	TYPE OF NOZZLE	APPLY GALLONS/ACRE
ANIAONIC ASPHALT EMULSION	7:1	COARSE SPRAY	1200
LATEX EMULSION	12.5:1	FINE SPRAY	235
RESIN IN WATER	4:1	FINE SPRAY	300
POLYACRYLAMIDE (PAM) - SPRAY ON			
APPLY ACCORDING TO MANUFACTURER'S INSTRUCTIONS. MAY ALSO BE USED AS AN ADDITIVE TO SEDIMENT BASINS TO FLOCCULATE AND PRECIPITATE SUSPENDED COLLOIDS. (SEE SEDIMENT BASIN STANDARD (PAGE 26-1 OF "STANDARDS FOR SOIL EROSION AND SEDIMENT CONTROL IN NEW JERSEY", LATEST EDITION)			
POLYACRYLAMIDE (PAM) - DRY SPRAY			
ACIDULATED SOY BEAN SOAP STICK	NONE	COARSE SPRAY	1200

TILLAGE

TO ROUGHEN SURFACE AND BRING CLODS TO THE SURFACE. THIS IS A TEMPORARY EMERGENCY MEASURE WHICH SHOULD BE USED BEFORE SOIL BLOWING STARTS. BEGIN PLOWING ON WINDWARD SIDE OF SITE. CHISEL-TYPE PLOWS SPACED ABOUT 12 INCHES APART, AND SPRING-TOOTHED HARROWS ARE EXAMPLES OF EQUIPMENT WHICH MAY PRODUCE THE DESIRED EFFECT.

SPRINKLING

SITE IS SPRINKLED UNTIL THE SURFACE IS WET.

BARRIERS

SOLID BOARD FENCES, SNOW FENCES, BURLAP FENCES, CRATE WALLS, BALES OF HAY, AND SIMILAR MATERIAL CAN BE USED TO CONTROL AIR CURRENTS AND SOIL BLOWING.

CALCIUM CHLORIDE

SHALL BE IN THE FORM OF LOOSE, DRY GRANULATES OF FLAKES FINE ENOUGH TO FEED THROUGH COMMONLY USED SPREADERS AT A RATE THAT WILL KEEP SURFACE MOIST BUT NOT CAUSE POLLUTION OR PLANT DAMAGE. IF USED ON STEEPER SLOPES, THEN USE OTHER PRACTICES TO PREVENT WASHING INTO STREAMS OR ACCUMULATION AROUND PLANTS.

STONE

COVER SURFACE WITH CRUSHED STONE OR COARSE GRAVEL.

CONSTRUCTION SEQUENCE

IMPLEMENTATION OF SOIL EROSION & SEDIMENT CONTROL MEASURES INCLUDING:

- INLET FILTERS 1 DAY
- SILT FENCE 1 DAY

CONSTRUCT IMPROVEMENTS:

- SITE CLEARING 1 WEEK
- COMPLETE MILLING OPERATIONS 1 WEEK
- COMPLETE GRADING 3 WEEKS
- INSTALL CURBING AND DRAINAGE 2 WEEKS
- PAVEMENT IMPROVEMENTS 2 WEEKS
- UNIFORMLY APPLY TOPSOIL TO AN AVERAGE DEPTH OF 5", MINIMUM OF 4" FIRMED IN PLACE 1 DAY
- FERTILIZING, SEEDING AND STRAW MULCHING 2 DAYS
- REMOVAL OF SOIL EROSION & SEDIMENT CONTROL MEASURES 1 DAY


NOTE: TOTAL ESTIMATED PROJECT DURATION: 10 WEEKS

THIS SCHEDULE IS FOR SOIL EROSION AND SEDIMENT CONTROL PURPOSES ONLY.

STOCKPILE

- ALL EXCAVATED MATERIAL EXCEPT TOPSOIL SHALL BE DISPOSED OF OFF-SITE. NO EXCAVATED MATERIAL EXCEPT TOPSOIL SHALL BE STOCKPILED AND STORED WITHIN THE PROJECT LIMITS.


TOTAL PROJECT AREA OF DISTURBANCE = 75,208 SF OR 1.73 ACRES

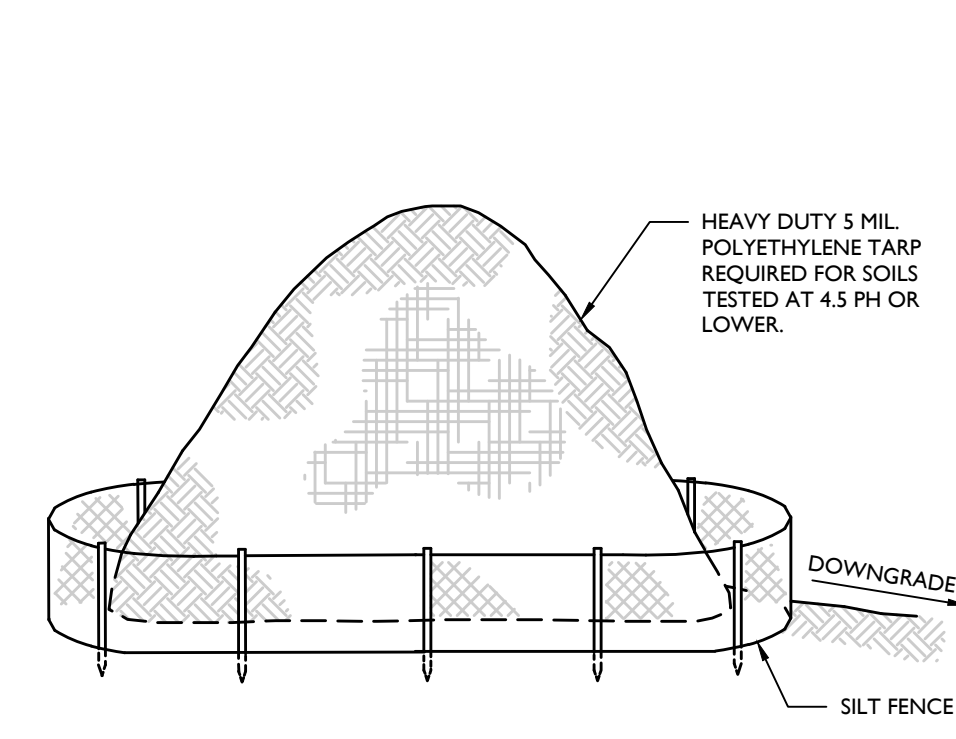


NOTES:

- ALL STOCKPILES SHALL NOT TO BE LOCATED WITHIN 50 FEET OF A FLOODPLAIN, SLOPE, ROADWAY OR DRAINAGE FACILITY.

1 TOPSOIL STOCKPILE DETAIL  
NOT TO SCALE MCNJ-SOIL-EROS-2500 05/01/17

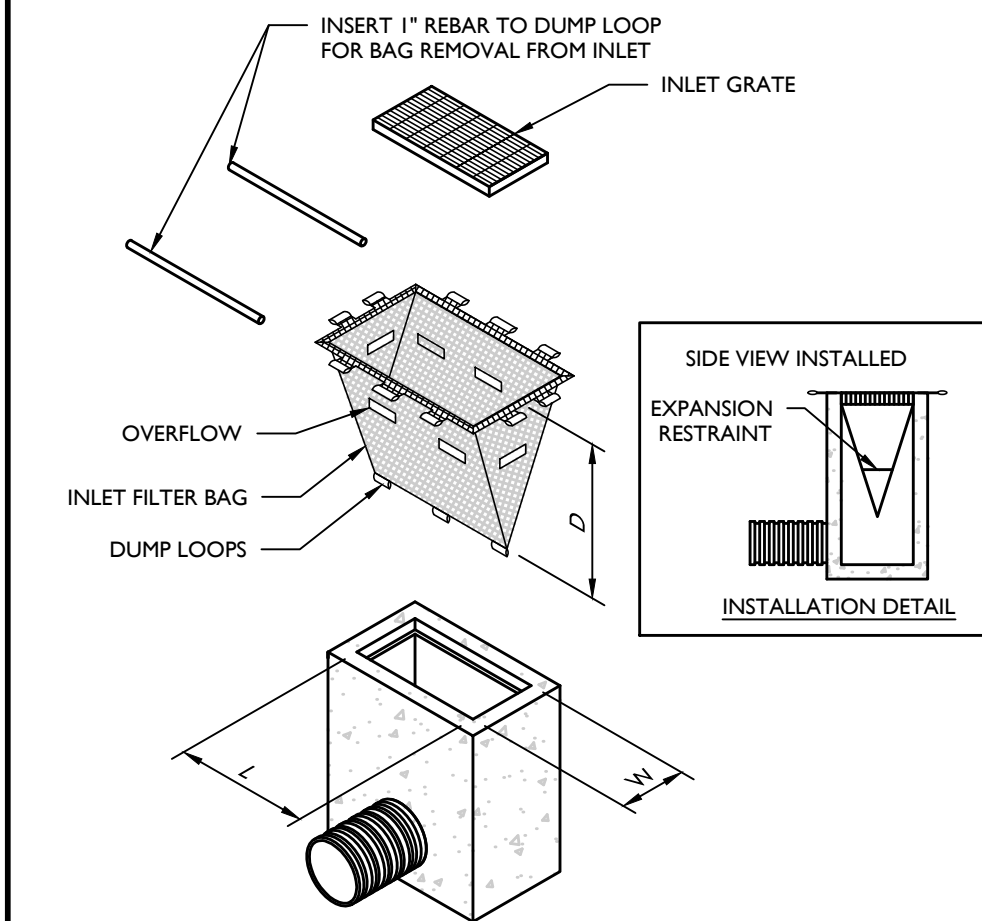


2 INLET PROTECTION (FILTER BAG) DETAIL  
NOT TO SCALE MCNJ-SOIL-EROS-1500 09/01/17

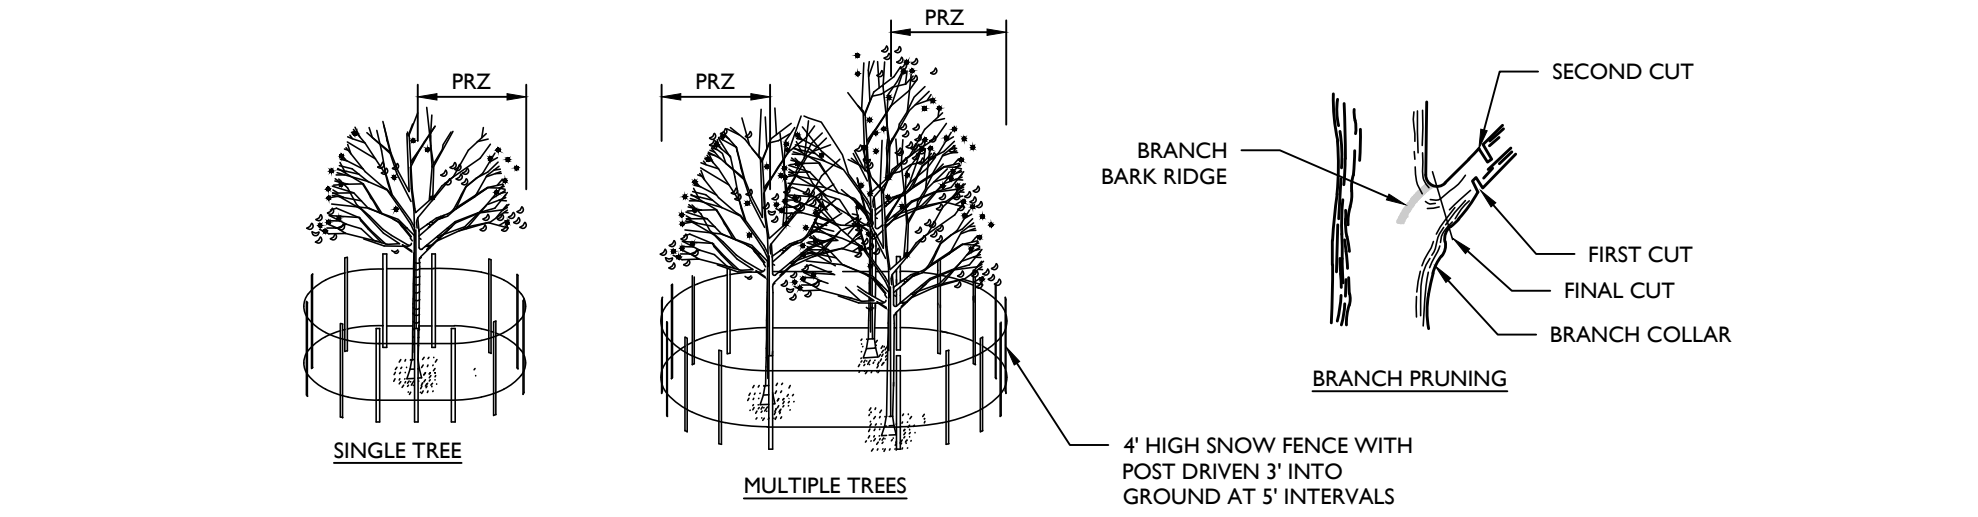

NOTES:

- PROTECTIVE FENCING IS TO BE ERECTED PRIOR TO CONSTRUCTION AND MAINTAINED DURING CONSTRUCTION AS DIRECTED BY THE LANDSCAPE ARCHITECT, SOIL CONSERVATION DISTRICT AND/OR MUNICIPAL ENGINEER.
- NO CONSTRUCTION ACTIVITY IS PERMITTED WITHIN THE PROTECTIVE FENCING.
- AS CONSTRUCTION NEARS COMPLETION THE FENCING WILL BE REMOVED AS DIRECTED.
- AT THE COMPLETION OF CONSTRUCTION, ALL TREES WILL BE PRUNED AS NECESSARY TO CORRECT ANY DAMAGE RESULTING FROM CONSTRUCTION ACTIVITY.
- GENERAL MECHANICAL DAMAGE - SEE CRITICAL ROOT ZONE CALCULATION (CRZ) FOR CORRECT PLACEMENT OF TREE PROTECTION.
- BOX TREES WITHIN 25 FEET OF A BUILDING SITE TO PREVENT MECHANICAL INJURY. FENCING OR OTHER BARRIER SHOULD BE INSTALLED BEYOND THE CRITICAL ROOT ZONE.
- BOARDS WILL NOT BE NAILED TO TREES DURING BUILDING OPERATIONS.
- FEEDER ROOTS SHOULD NOT BE CUT IN AN AREA INSIDE THE PROTECTED ROOT ZONE (PRZ) OR CRITICAL ROOT ZONE (CRZ). TREE ROOT SYSTEM COMMONLY EXTEND BEYOND THE DRAIN LINE.
- DAMAGED TRUNKS OR EXPOSED ROOTS SHOULD HAVE DAMAGED BARK REMOVED IMMEDIATELY AND NO PAINT SHALL BE APPLIED. EXPOSED ROOTS SHOULD BE COVERED WITH TOPSOIL IMMEDIATELY AFTER EXCAVATION IS COMPLETE. ROOTS SHALL BE PRUNED TO GIVE A CLEAN, SHARP SURFACE AMENABLE TO HEALING. ROOTS EXPOSED DURING HOT WEATHER SHOULD BE IRRIGATED TO PREVENT PERMANENT TREE INJURY. CARE FOR SERIOUS INJURY SHOULD BE PRESCRIBED BY A PROFESSIONAL FORESTER OR CERTIFIED TREE EXPERT.
- TREE LIMB REMOVAL WHERE NECESSARY, WILL BE DONE AS NATURAL TARGET PRUNING TO REMOVE THE DESIRED BRANCH COLLAR. THERE SHOULD BE NO FLUSH CUTS. FLUSH CUTS DESTROY A MAJOR DEFENSE SYSTEM OF THE TREE. NO TREE PAINT SHALL BE APPLIED. ALL CUTS SHALL BE MADE AT THE OUTSIDE EDGE OF THE BRANCH COLLAR. CUTS MADE TOO FAR BEYOND THE BRANCH COLLAR MAY LEAD TO EXCESS SPROUTING, CRACKS AND ROT. REMOVAL OF A "V" CROTCH SHOULD BE CONSIDERED FOR FREE STANDING SPECIMEN TREES TO AVOID FUTURE SPLITTING DAMAGE.
- CRITICAL ROOT ZONE (CRZ) OR PROTECTED ROOT ZONE (PRZ) CALCULATION: MEASURE DBH OF THE TREE (DIAMETER OF TREE IN BREAST HEIGHT OR 4.5' ABOVE GROUND ON THE UPHILL SIDE) IN INCHES. CRZ OR PRZ = DBH TIMES 1.5 (FOR OLD/UNHEALTHY/SENSITIVE TREES) OR DBH X 1.0 (FOR YOUNG/HEALTHY/TOLERANT TREES), EXPRESS IN FEET.


3 TEMPORARY TREE PROTECTION DETAIL  
NOT TO SCALE MCNJ-SOIL-EROS-2100 05/01/17

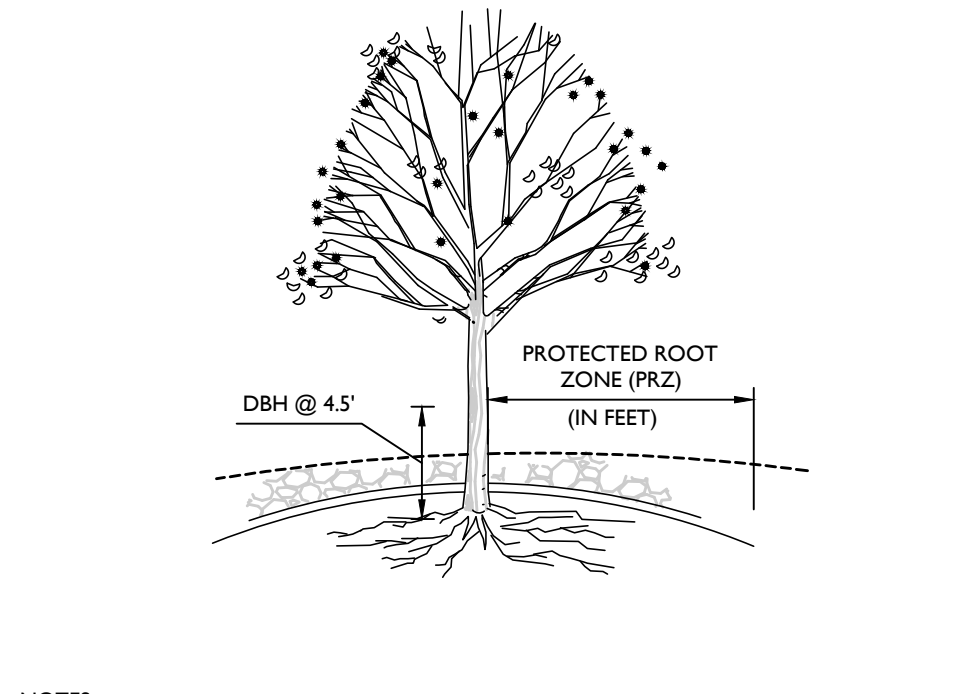

NOTES:

- MEASURE THE DBH (DIAMETER OF TREE AT BREAST HEIGHT, 4.5' ABOVE GROUND ON THE UPHILL SIDE) IN INCHES.
- PROTECTED ROOT ZONE (PRZ) = CRITICAL ROOT ZONE IN FEET = DBH (INCHES) X 1.5' (FOR OLD/SENSITIVE TREES) OR DBH X 1.0 (FOR YOUNG/TOLERANT TREES)
- TILE AND GRAVEL WILL ALLOW AIR CIRCULATION TO ROOT ZONE UNDER A FILL.

4 TREE PROTECTION IN FILL AREAS DETAIL  
NOT TO SCALE MCNJ-SOIL-EROS-2101 05/01/17

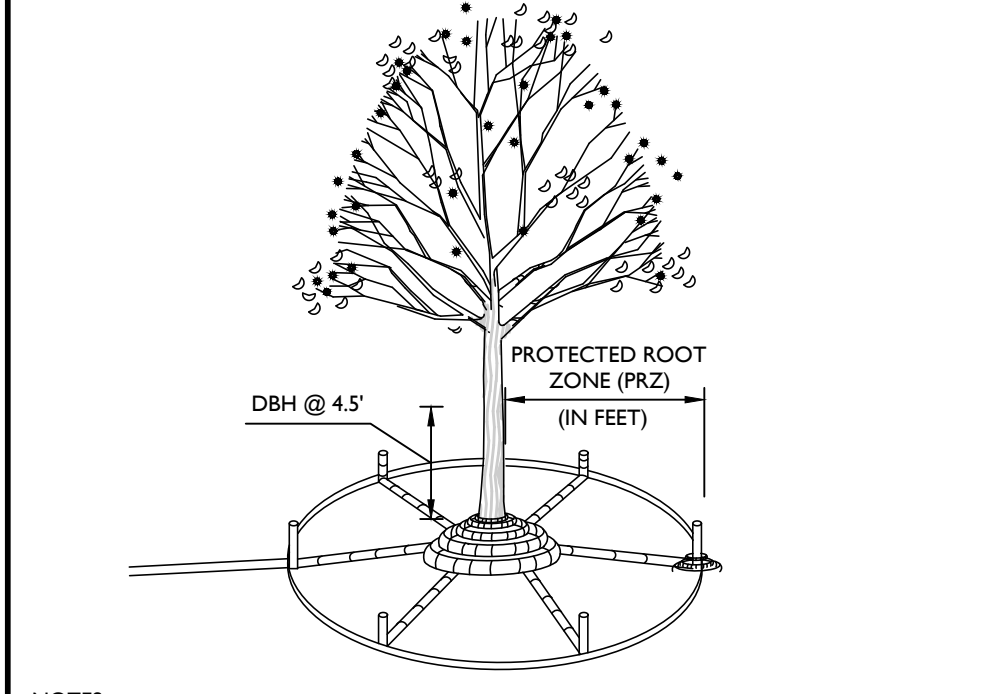

NOTES:

- MEASURE THE DBH (DIAMETER OF TREE AT BREAST HEIGHT, 4.5' ABOVE GROUND ON THE UPHILL SIDE) IN INCHES.
- PROTECTED ROOT ZONE (PRZ) = CRITICAL ROOT ZONE IN FEET = DBH (INCHES) X 1.5' (FOR OLD/SENSITIVE TREES) OR DBH X 1.0 (FOR YOUNG/TOLERANT TREES)

5 TREE PROTECTION IN CUT AREAS DETAIL  
NOT TO SCALE MCNJ-SOIL-EROS-2102 05/01/17

**MASER CONSULTING, P.A.**  
Customer Loyalty through Client Satisfaction  
www.maserconsulting.com  
Office Locations:  
■ NEW JERSEY ■ NEW MEXICO  
■ NEW YORK ■ MARYLAND  
■ PENNSYLVANIA ■ GEORGIA  
■ VIRGINIA ■ TEXAS  
■ FLORIDA ■ TENNESSEE  
■ NORTH CAROLINA ■ COLORADO

State of NJ, C.O.A.: 24GA27986500

Copyright © 2021, Maser Consulting, All Rights Reserved. This drawing and all the information contained herein is authorized for use only by the party for whom the services were contracted or to whom it is certified. This drawing may not be copied, reused, disclosed, distributed or relied upon for any other purpose without the express written consent of Maser Consulting, P.A.

**811** PROTECT YOURSELF  
ALL STATES REQUIRE NOTIFICATION OF EXCAVATION, DISTURBANCE, OR ANY OTHER PREPARING TO DISTURB THE EARTH'S SURFACE ANYWHERE IN ANY STATE  
Know what's below.  
Call before you dig.  
FOR STATE SPECIFIC DIRECT PHONE NUMBERS VISIT: WWW.CALL811.COM

REV	DATE	DESCRIPTION	DRAWN BY	DATE	REVISED PER NJDOT COMMENTS
1	6/8/20	REVISED PER NJDOT COMMENTS	BAK		
2	6/15/20	REVISED PER CURB CHANGES	BAK		
3	6/17/20	REVISED FOR SCD SUBMISSION	BAK		
4	7/7/20	REVISED PER SCD COMMENTS	BAK		
5	3/5/21	REVISED PER TOWNSHIP COMMENTS	BAK		
6	4/2/21	REVISED PER NJDOT COMMENTS	BAK		

**CARL P. O'BRIEN**  
NEW JERSEY PROFESSIONAL ENGINEER - LICENSE NUMBER: G645154

CONSTRUCTION PLANS  
FOR  
NJDOT FY 2019 -  
BROOKSIDE PLACE  
DRAINAGE  
IMPROVEMENTS

TOWNSHIP OF CRANFORD  
COUNTY OF UNION  
STATE OF NEW JERSEY

**Mt. Arlington Office**  
400 Valley Road  
Suite 304  
Mount Arlington, NJ 07856  
Phone: 973.398.3110  
Fax: 973.398.3199

SCALE:	DATE:	DRAWN BY:	CHECKED BY:
AS SHOWN	1/30/20	BAK	PWJ
PROJECT NUMBER:	DRAWING NAME:		
CDT065	C-DTLS		

SHEET TITLE:  
CONSTRUCTION DETAILS

SHEET NUMBER:  
18 of 36

NOTE: DO NOT SCALE DRAWINGS FOR CONSTRUCTION.





















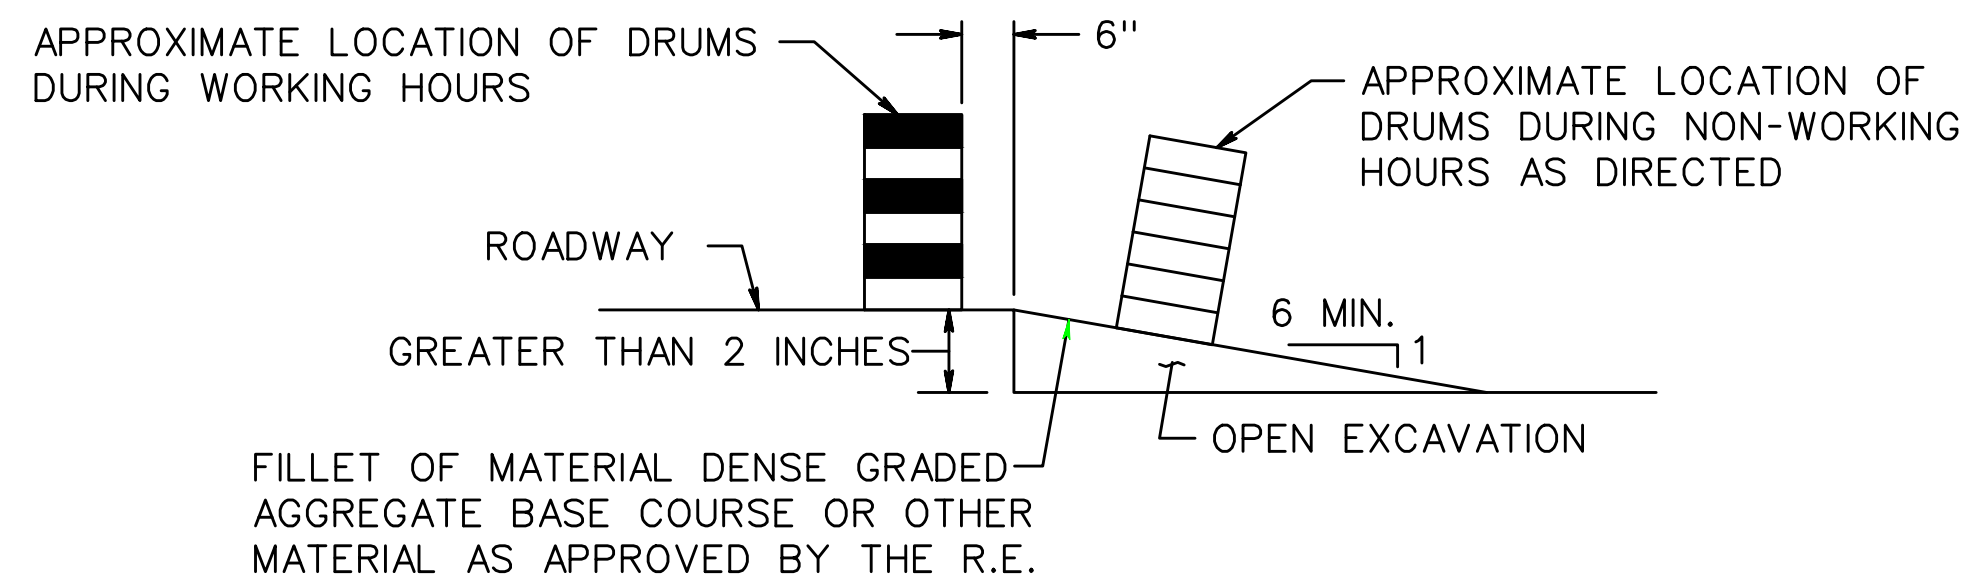


NOTE:  
ESCAPE RAMPS MUST BE CONSTRUCTED AND MAINTAINED DURING NON-WORKING HOURS WHERE A VERTICAL DROP GREATER THAN 2 INCHES EXISTS ADJACENT TO TRAVELED LANE.

ESCAPE RAMP DETAIL

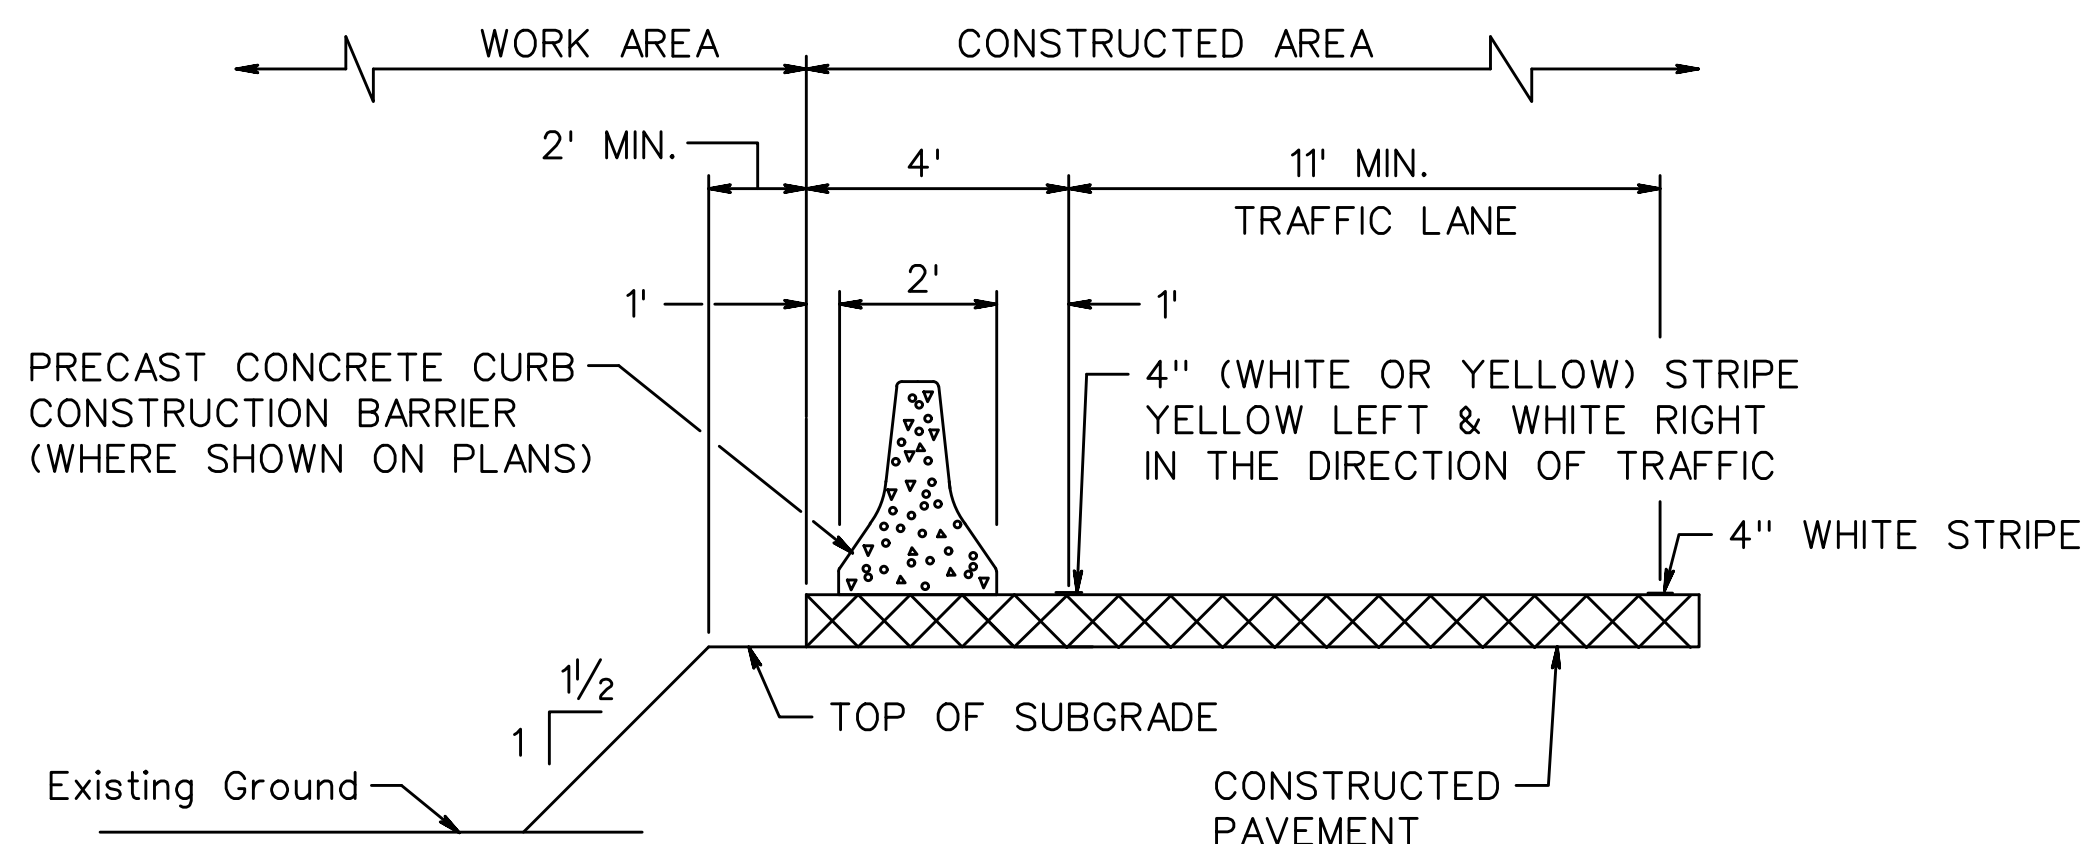

TYPICAL SECTION

PLACEMENT OF PRECAST CONCRETE CONSTRUCTION BARRIER

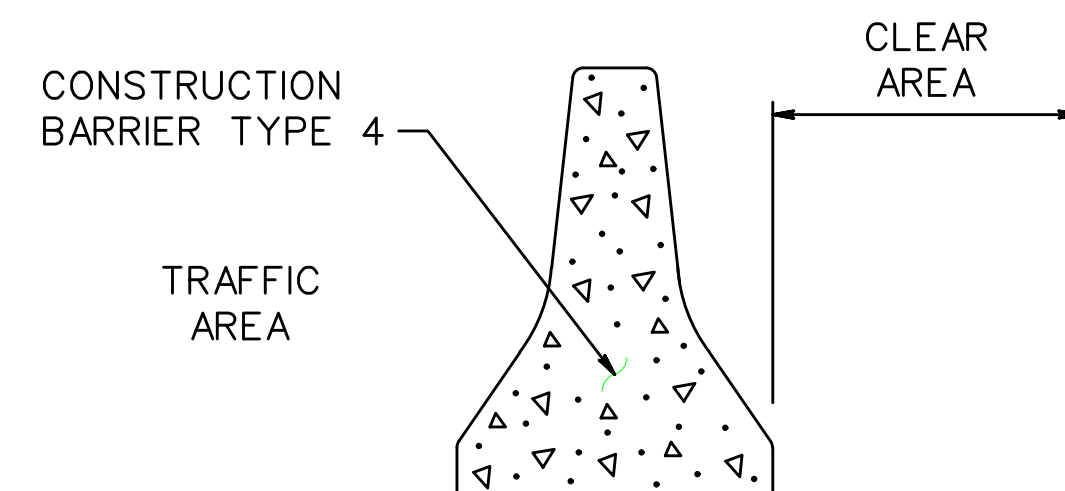

- NOTES:
- CHANGES TO THE PROPOSED JOINT CLASS AT ANY LOCATION MUST BE APPROVED BY THE DEPT.
  - NO ROADWAY DROP OFFS, OBSTRUCTIONS, STORAGE OF MATERIALS OR WORK WILL BE PERMITTED IN THE CLEAR AREA UNLESS APPROVED BY THE R.E.

STAGE	LOCATION		JOINT CLASS
	RTE.	STA. TO	

JOINT CLASS	CLEAR AREA
A	20 INCHES
B	16 INCHES
C	11 INCHES

CONSTRUCTION BARRIER, TYPE 4  
JOINT CLASS AND CLEAR AREA

REGULATORY APPROACH SPEED OF TRAFFIC MILES/HOUR	RECOMMENDED SIGHT DISTANCE TO BEGINNING OF CHANNELIZING TAPERS		
	DESIRABLE		MINIMUM
	RURAL FEET	URBAN FEET	RURAL AND URBAN FEET
25	375	525	150
30	450	625	200
35	525	725	250
40	600	825	325
45	675	925	400
50	750	1025	475
55	875	1150	550
60	1000	1275	650
65	1050		725

- NOTES:
- AVOIDANCE MANEUVER IS FOR A SPEED, PATH, AND/OR DIRECTION CHANGE PRIOR TO THE BEGINNING OF CHANNELIZING TAPERS.
  - RECOMMENDED DISTANCES BETWEEN TWO SEPARATE LANE CLOSURES SHALL BE DOUBLE THE VALUES SHOWN ABOVE.
  - RURAL AND URBAN ROAD DESIGNATIONS SHALL BE AS DEFINED IN THE NJDOT STATE HIGHWAY STRAIGHT LINE DIAGRAMS.
  - DESIRABLE VALUES SHALL BE PROVIDED WHEREVER POSSIBLE. IF IT IS NOT FEASIBLE OR PRACTICAL TO PROVIDE DESIRABLE VALUES BECAUSE OF HORIZONTAL OR VERTICAL CURVATURE OR IF RELOCATION OF THE TAPER IS NOT POSSIBLE, THEN MINIMUM VALUES CAN BE APPLIED. WHEN MINIMUM VALUES ARE USED, SPECIAL ATTENTION SHOULD BE GIVEN TO THE USE OF SUITABLE TRAFFIC CONTROL DEVICES FOR PROVIDING ADVANCED WARNING OF THE CONDITIONS THAT ARE LIKELY TO BE ENCOUNTERED.
  - TAPERS SHALL BE LOCATED TO MAXIMIZE THE VISIBILITY OF THEIR TOTAL LENGTH.

RECOMMENDED TAPER LENGTH AND SPACING FOR CHANNELIZING TAPERS					RECOMMENDED SPACING ALONG TANGENTS	
REGULATORY APPROACH SPEED OF TRAFFIC MILES/HOUR	MINIMUM TAPER RATIO IN LENGTH PER FOOT OF WIDTH	MINIMUM TAPER LENGTH L - FOR LANE WIDTHS			MAXIMUM DEVICE (B) SPACING ALONG TAPERS IN FEET	MAXIMUM DEVICE (D) SPACING ALONG TANGENTS IN FEET
		10'	11'	12'		
25	10.5:1	105	115	125	25	50
30	15:1	150	165	180	30	60
35	20.5:1	205	225	245	35	70
40	27:1	270	300	325	40	80
45	45:1	450	495	540	45	90
50	50:1	500	550	600	50	100
55	55:1	550	605	660	55	110
60	60:1	600	660	720	60	120
65	65:1	650	715	780	65	130

NOTE:  
THE MAXIMUM DEVICE SPACING ALONG CURVES SHALL BE AS DEFINED FOR TAPERS (B) IN THE ABOVE TABLE.


N.T.S.

TCD-2


NEW JERSEY DEPARTMENT OF TRANSPORTATION

TRAFFIC CONTROL DETAILS



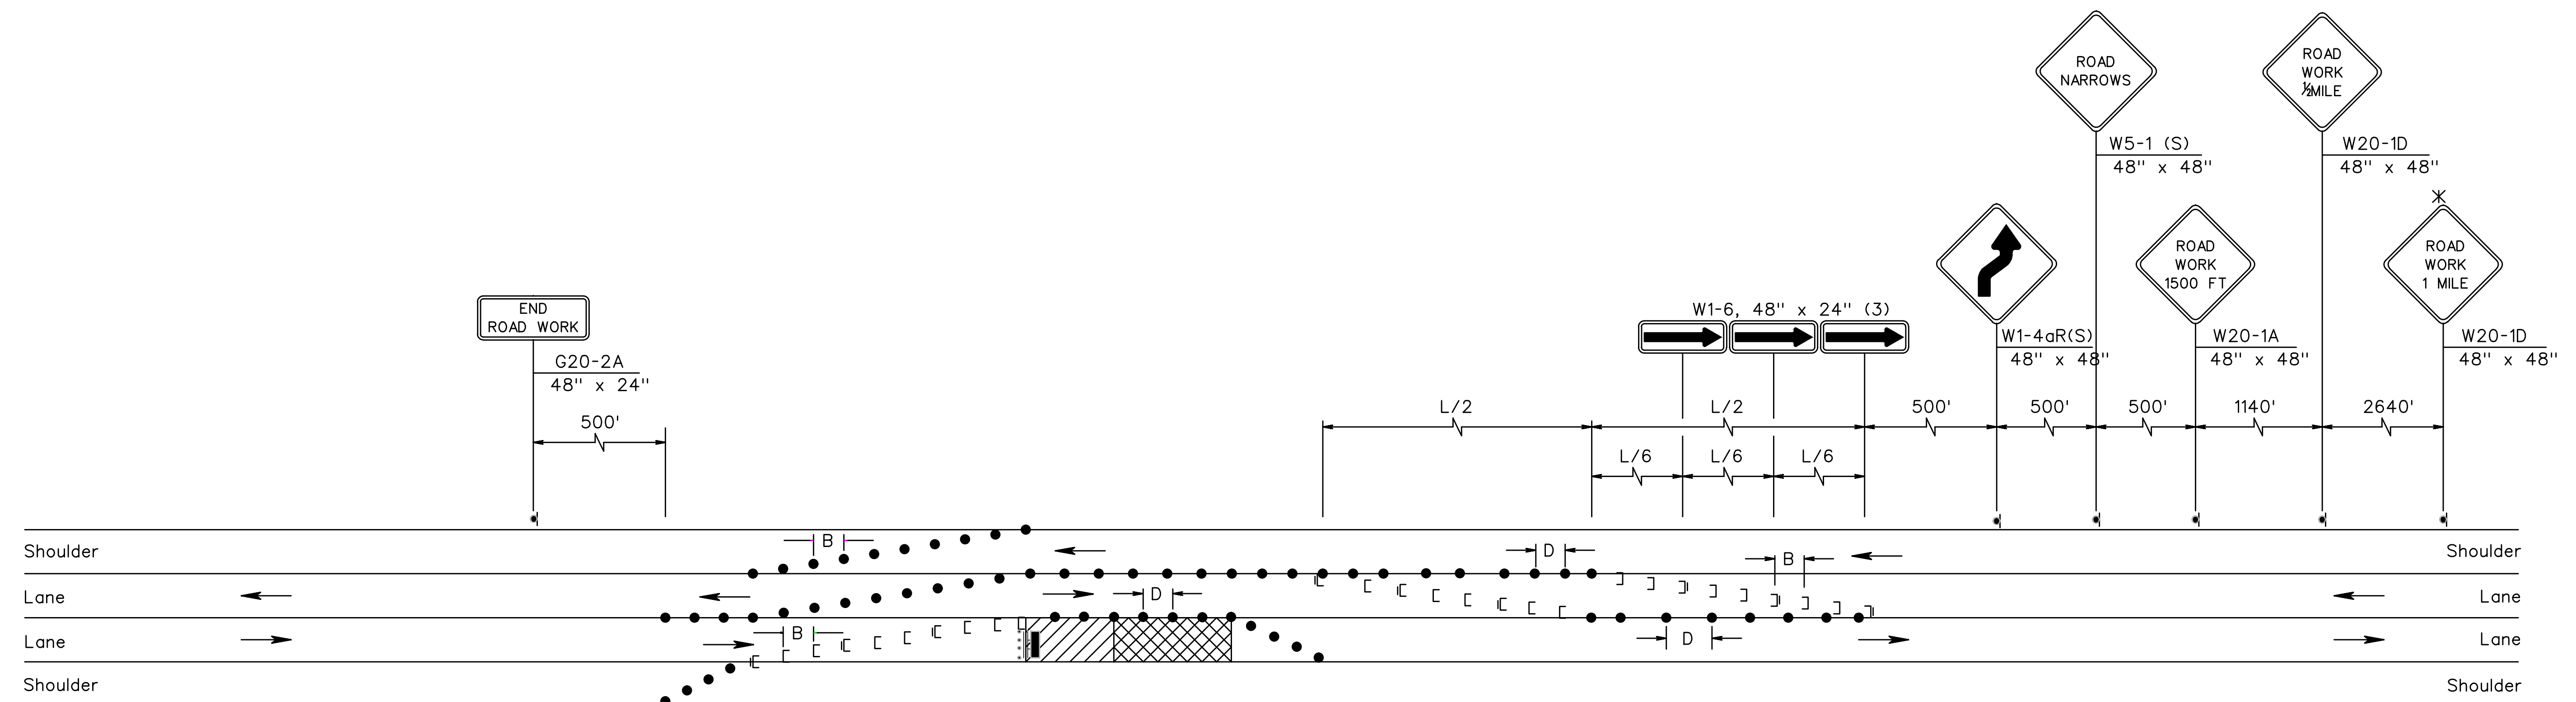

2 LANES, UNDIVIDED, LANE & SHOULDER CLOSING

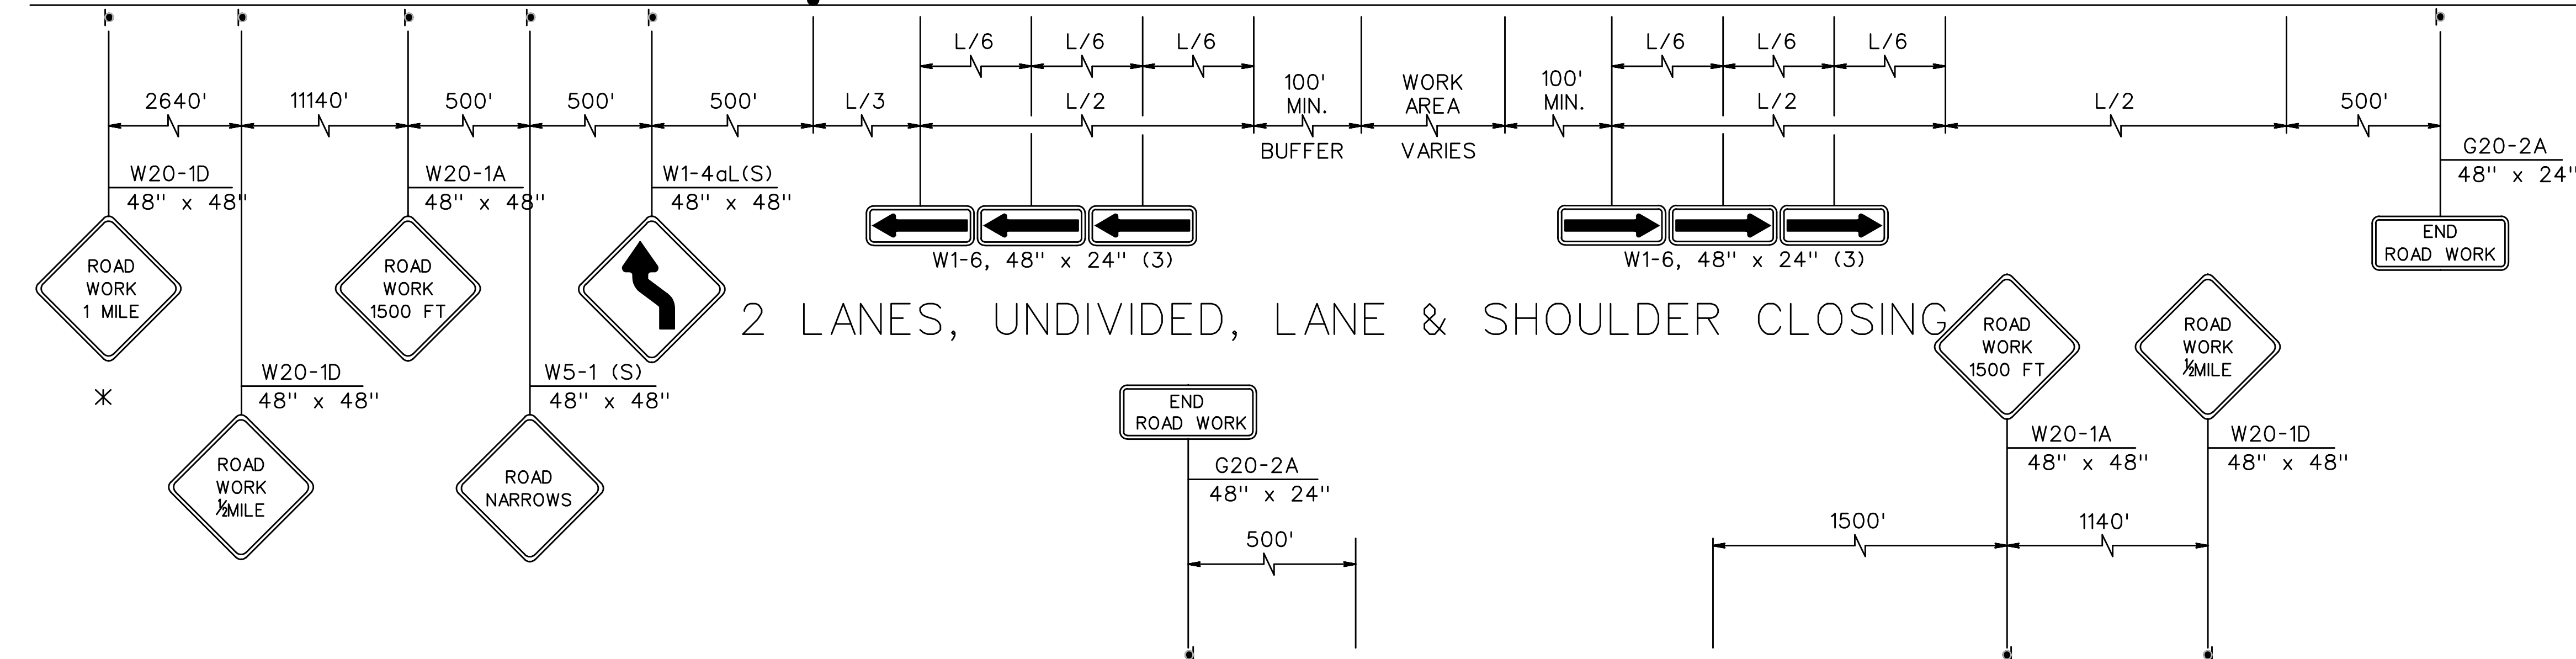


\* THIS SIGN SHALL BE INSTALLED FOR ROADS WITH A SPEED LIMIT OF 45 M.P.H. OR GREATER UNLESS OTHERWISE DIRECTED BY THE RE.

NOTE:  
SEE RECOMMENDED TAPER LENGTH AND SPACING TABLE ON SHEET TCD-2 FOR VALUES OF L, B AND D.

N.T.S.



R8-8 SIGN DETAIL  
NOT TO SCALE

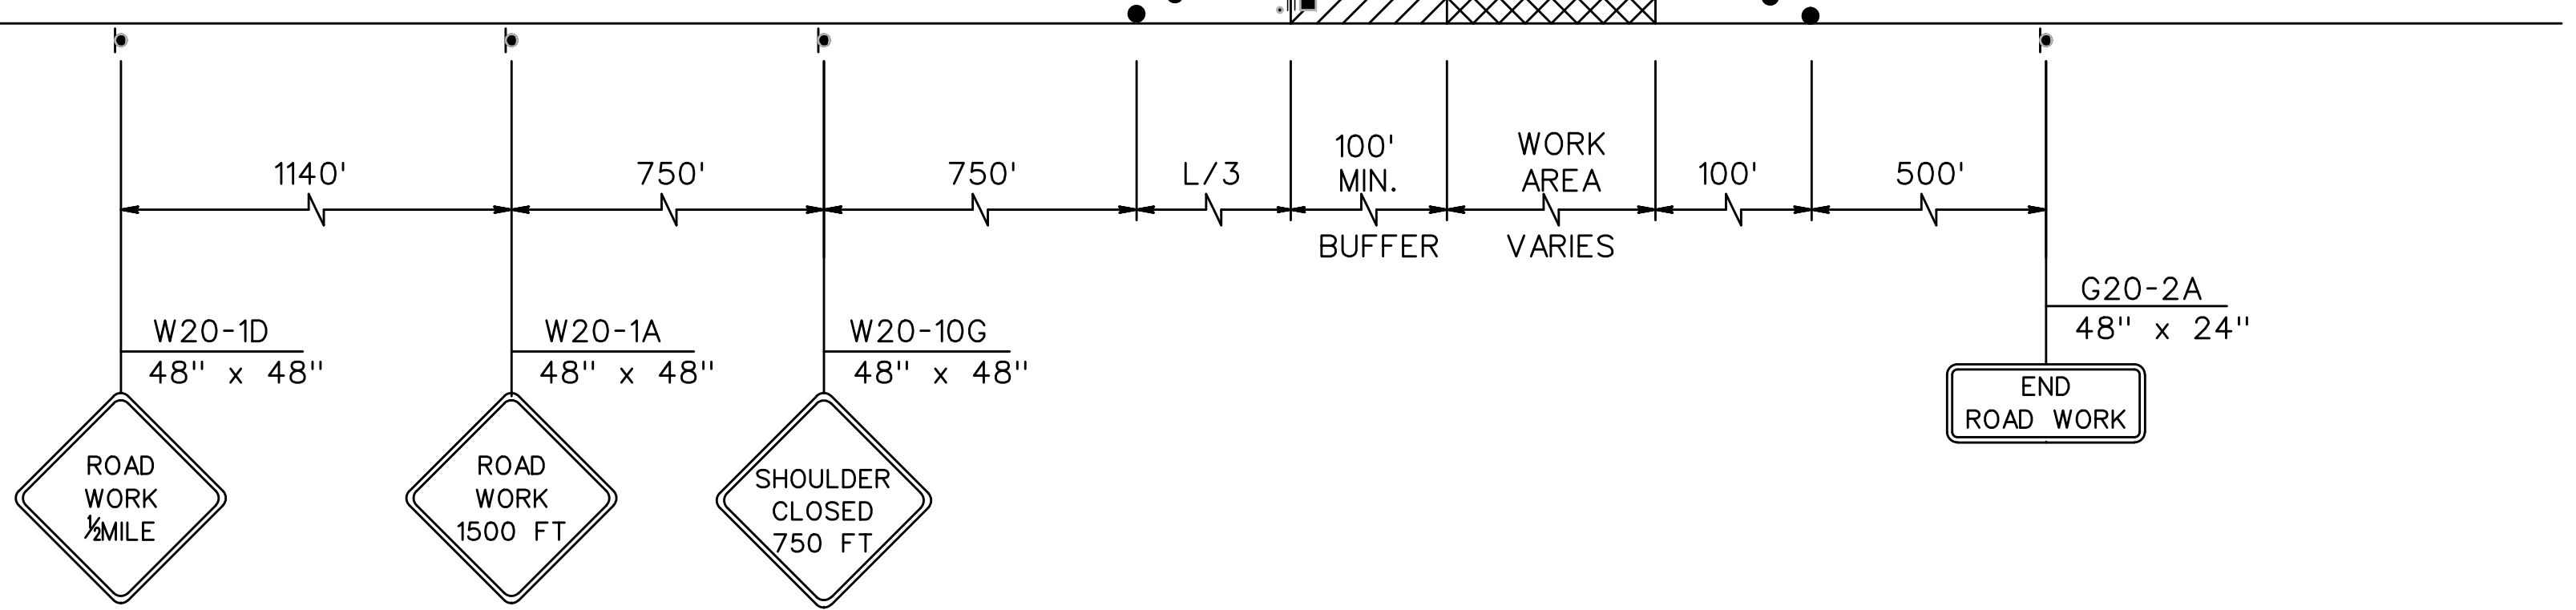


2 LANES, UNDIVIDED, SHOULDER CLOSING

NEW JERSEY DEPARTMENT OF TRANSPORTATION

TRAFFIC CONTROL DETAILS

TCD-3



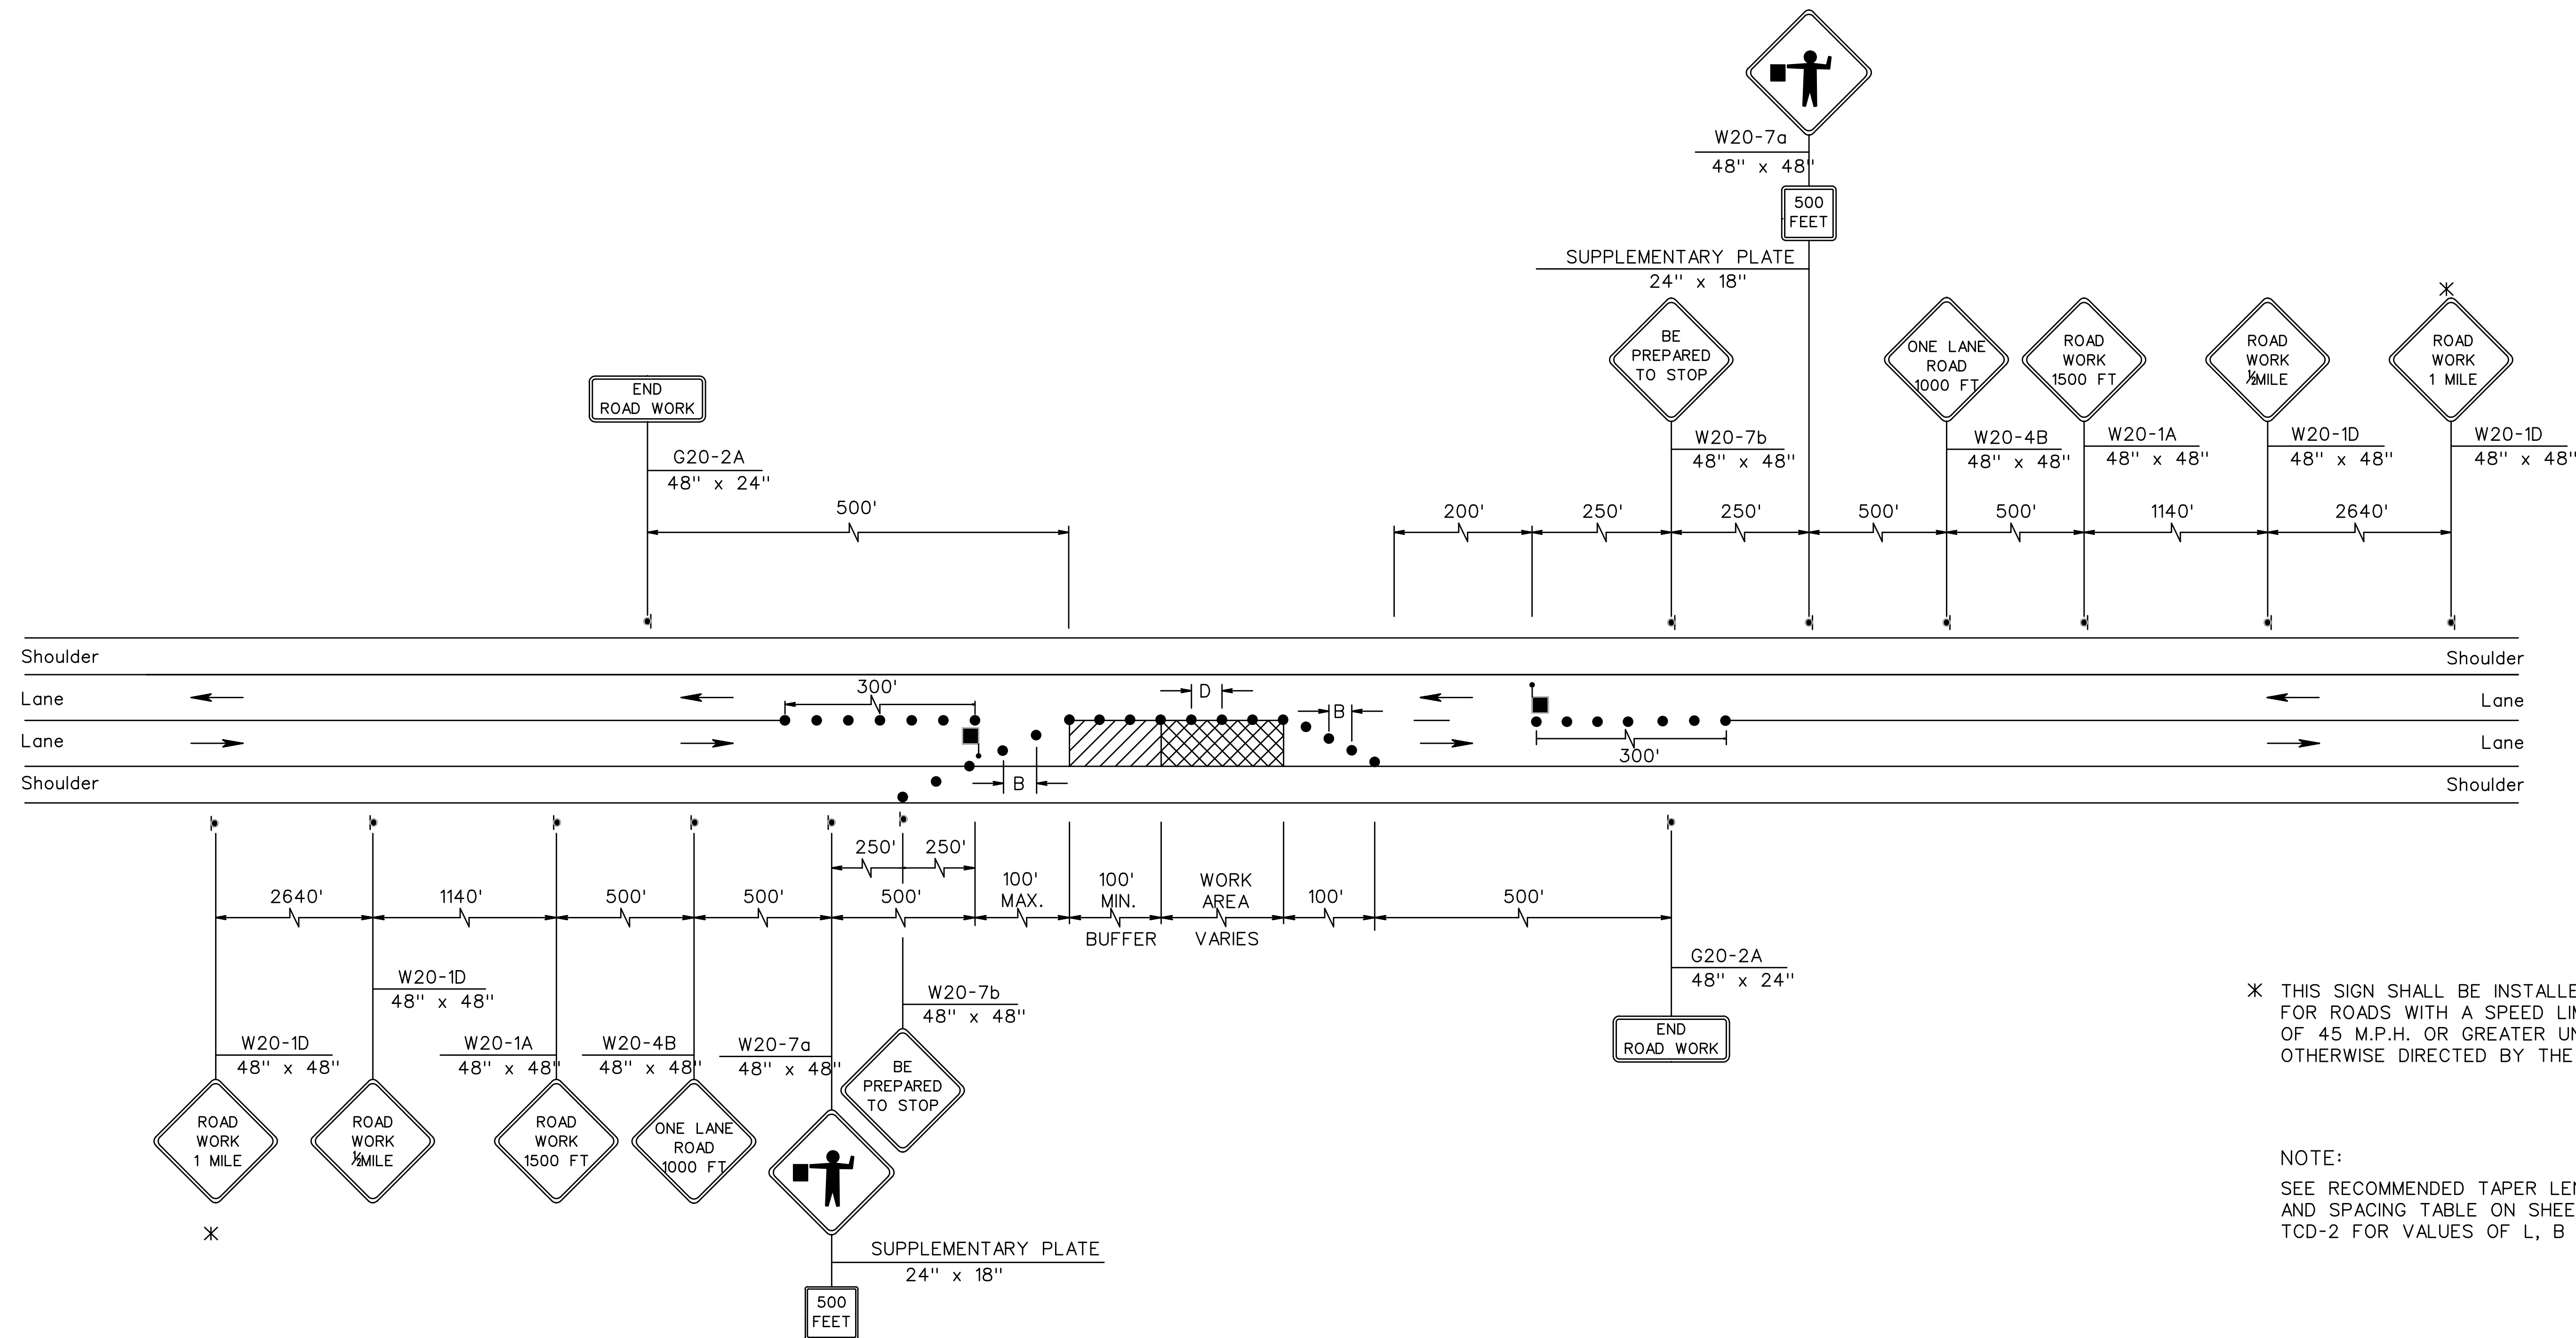

\* THIS SIGN SHALL BE INSTALLED FOR ROADS WITH A SPEED LIMIT OF 45 M.P.H. OR GREATER UNLESS OTHERWISE DIRECTED BY THE RE.

NOTE:  
SEE RECOMMENDED TAPER LENGTH AND SPACING TABLE ON SHEET TCD-2 FOR VALUES OF L, B AND D.

2 LANES, UNDIVIDED, LANE & SHOULDER CLOSING W/FLAGGING











N.T.S.

TCD-4

NEW JERSEY DEPARTMENT OF TRANSPORTATION


TRAFFIC CONTROL DETAILS



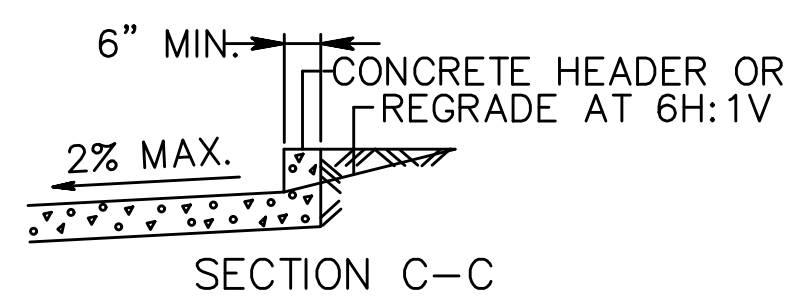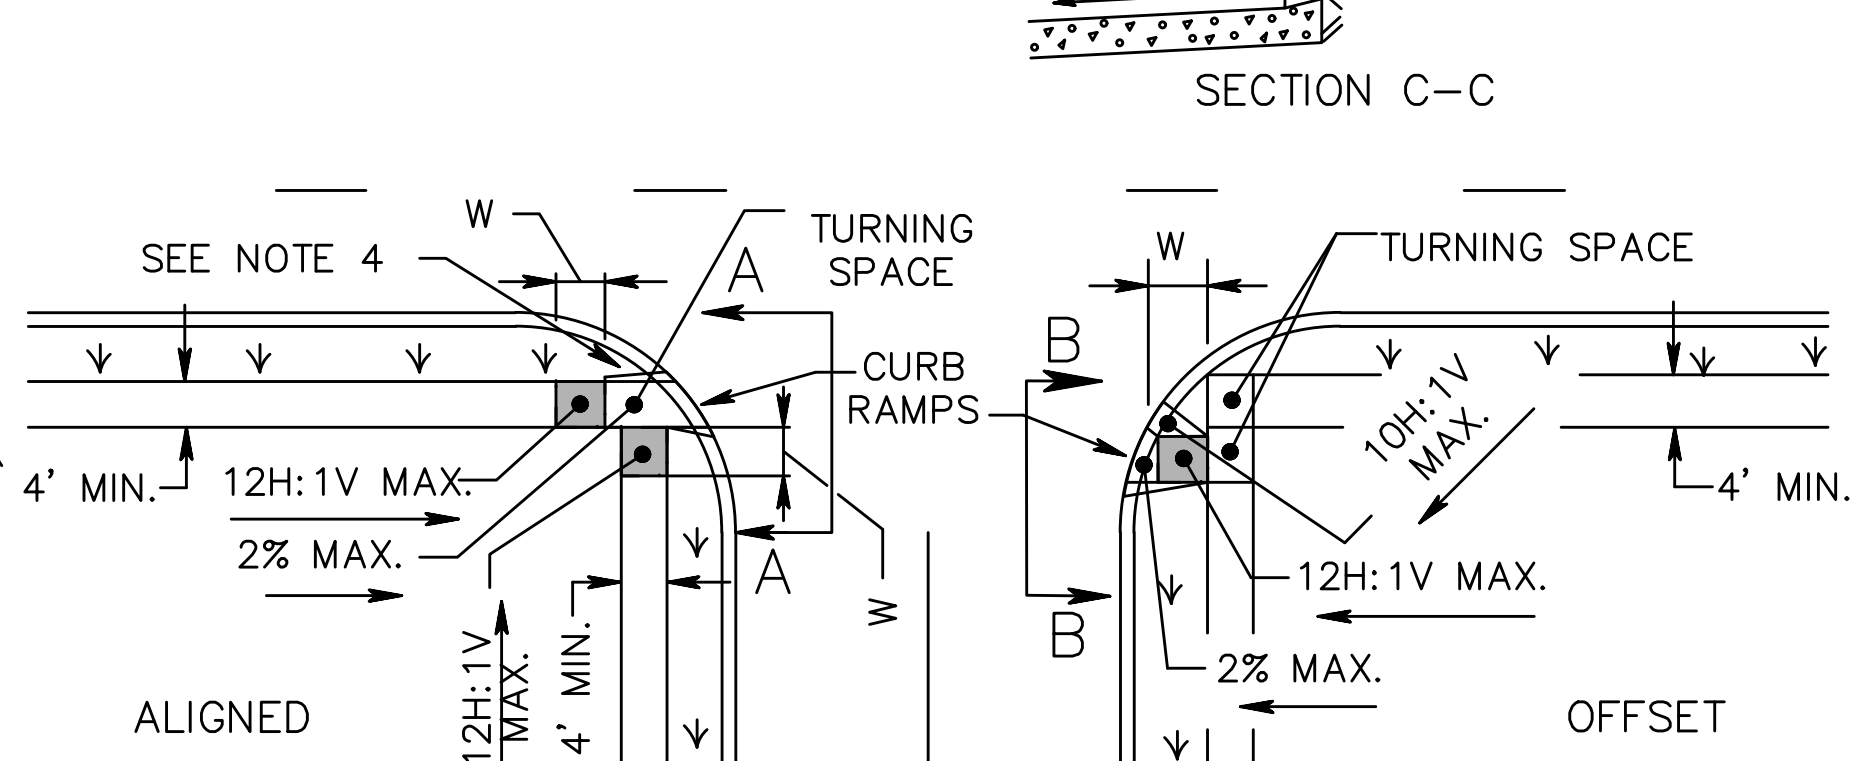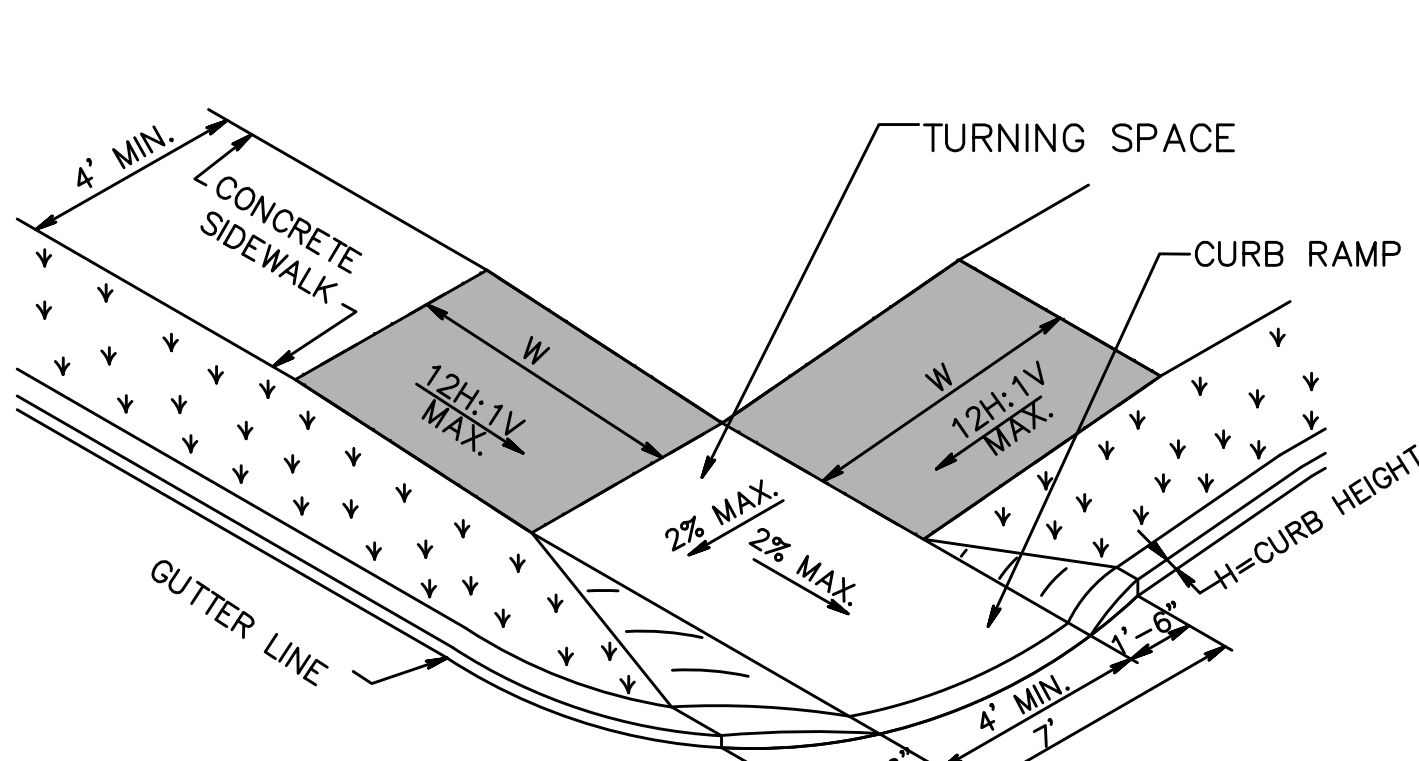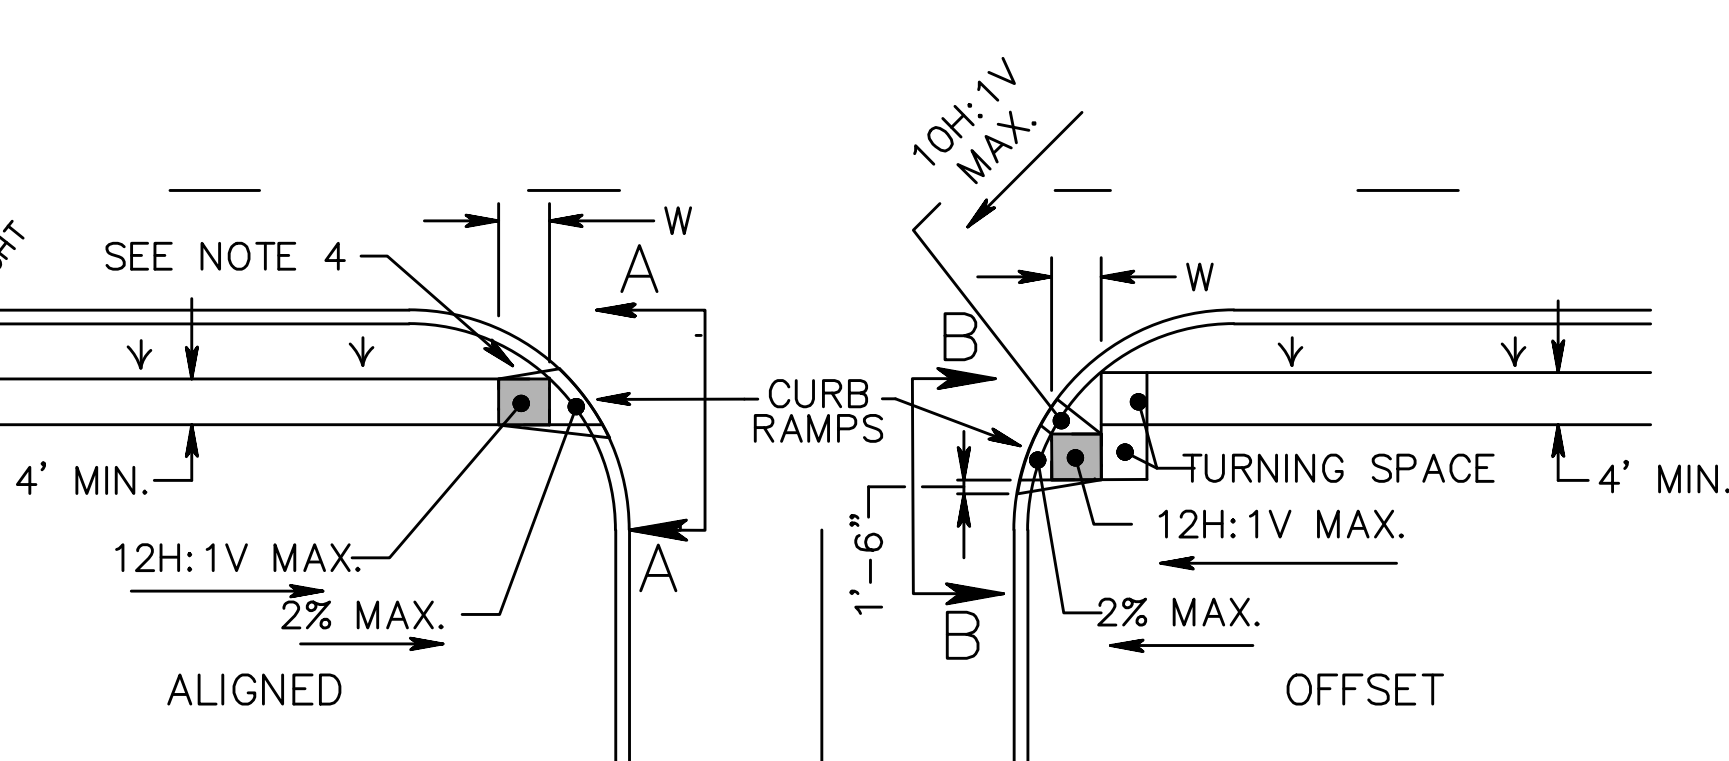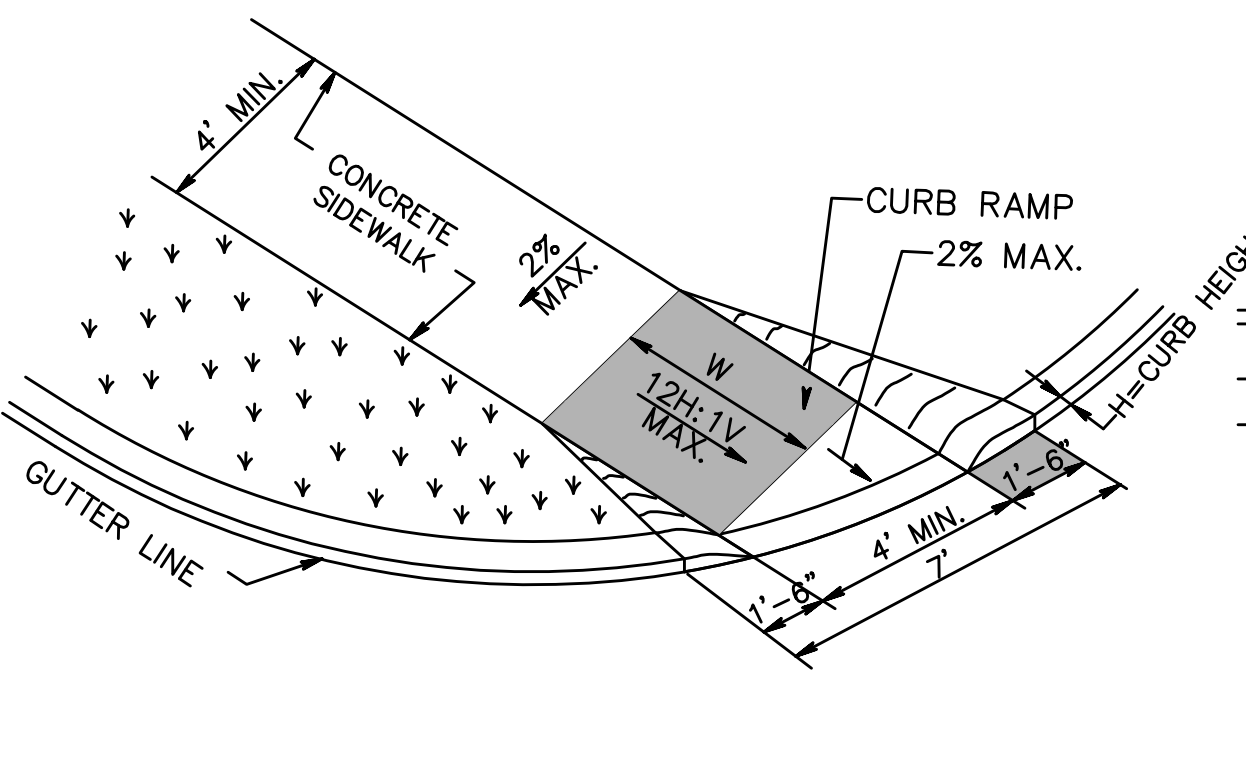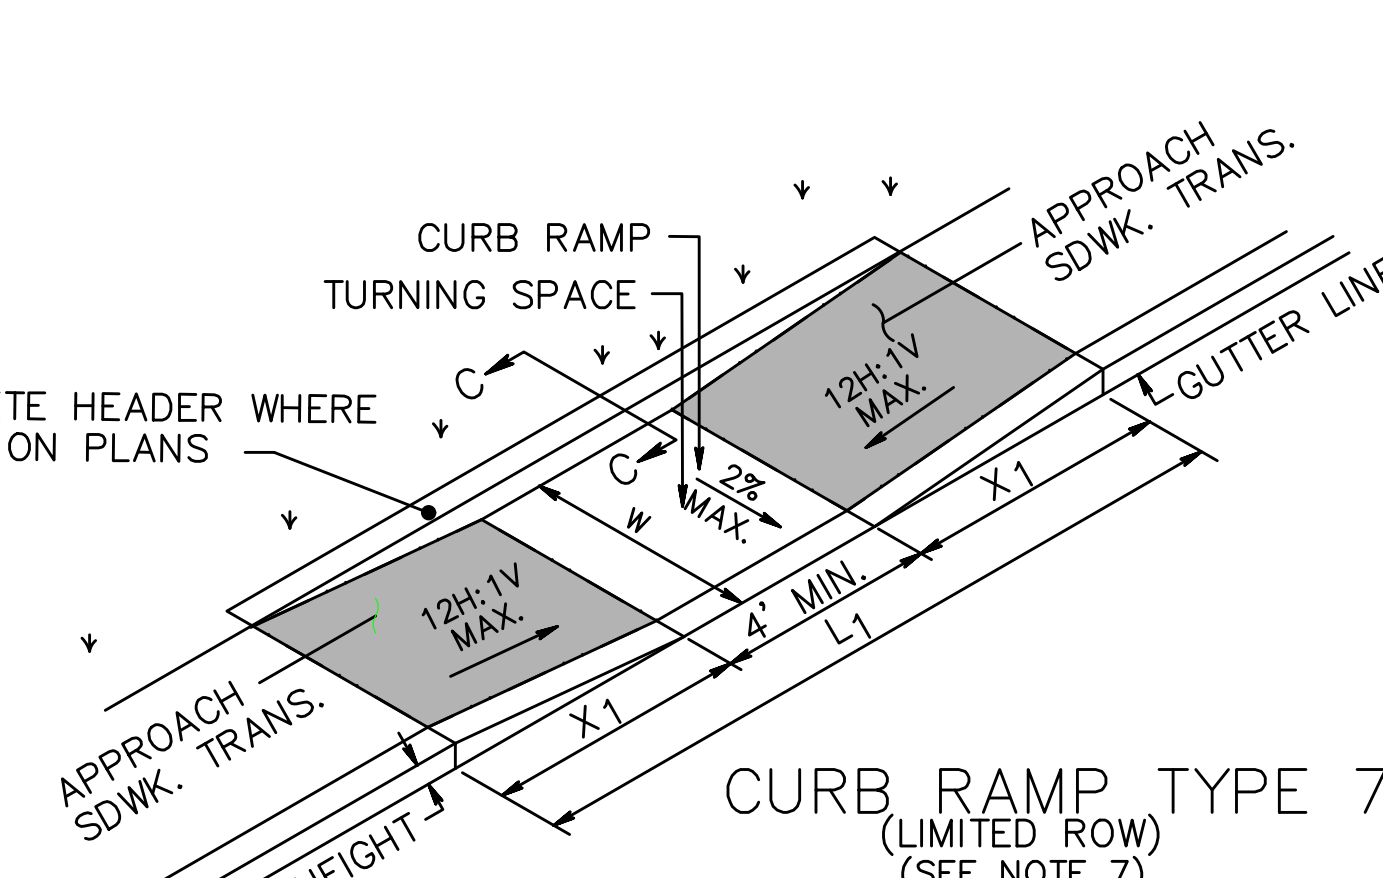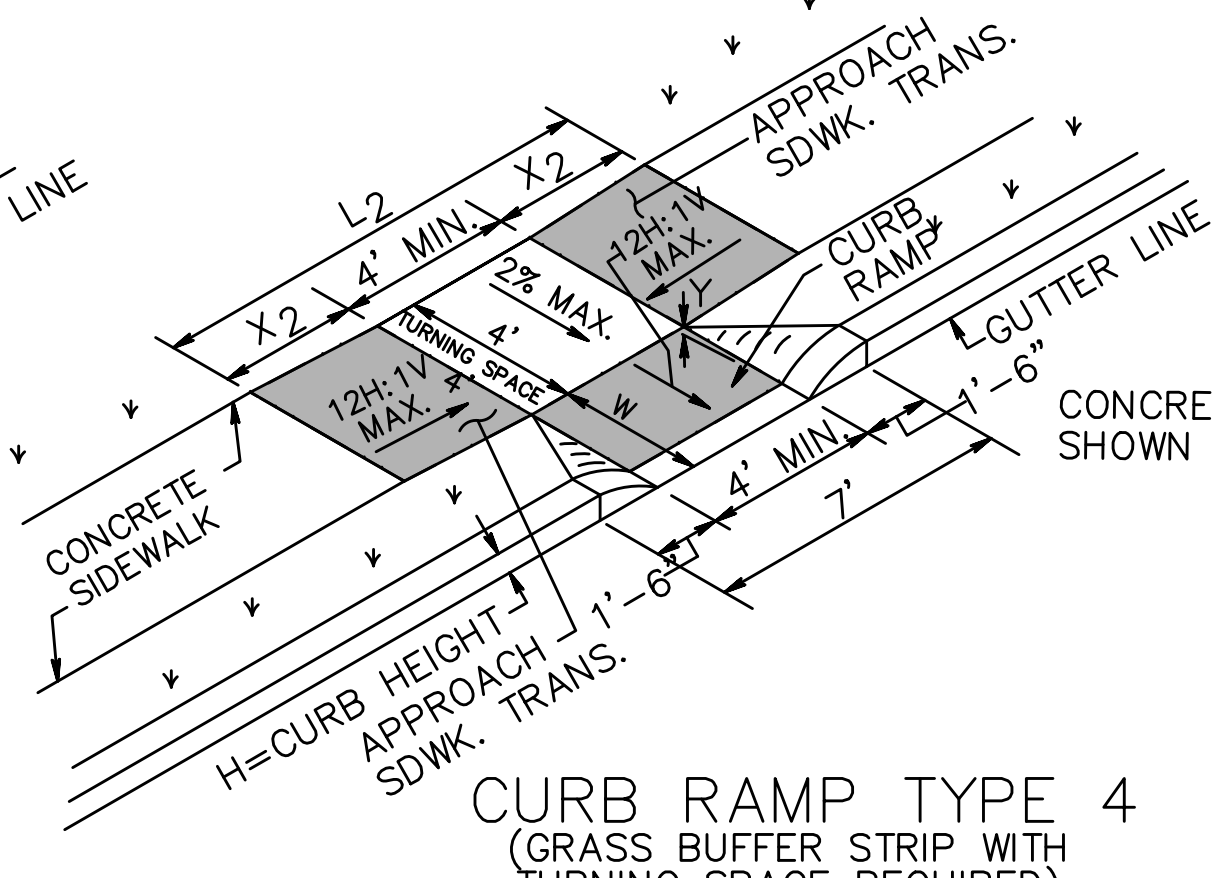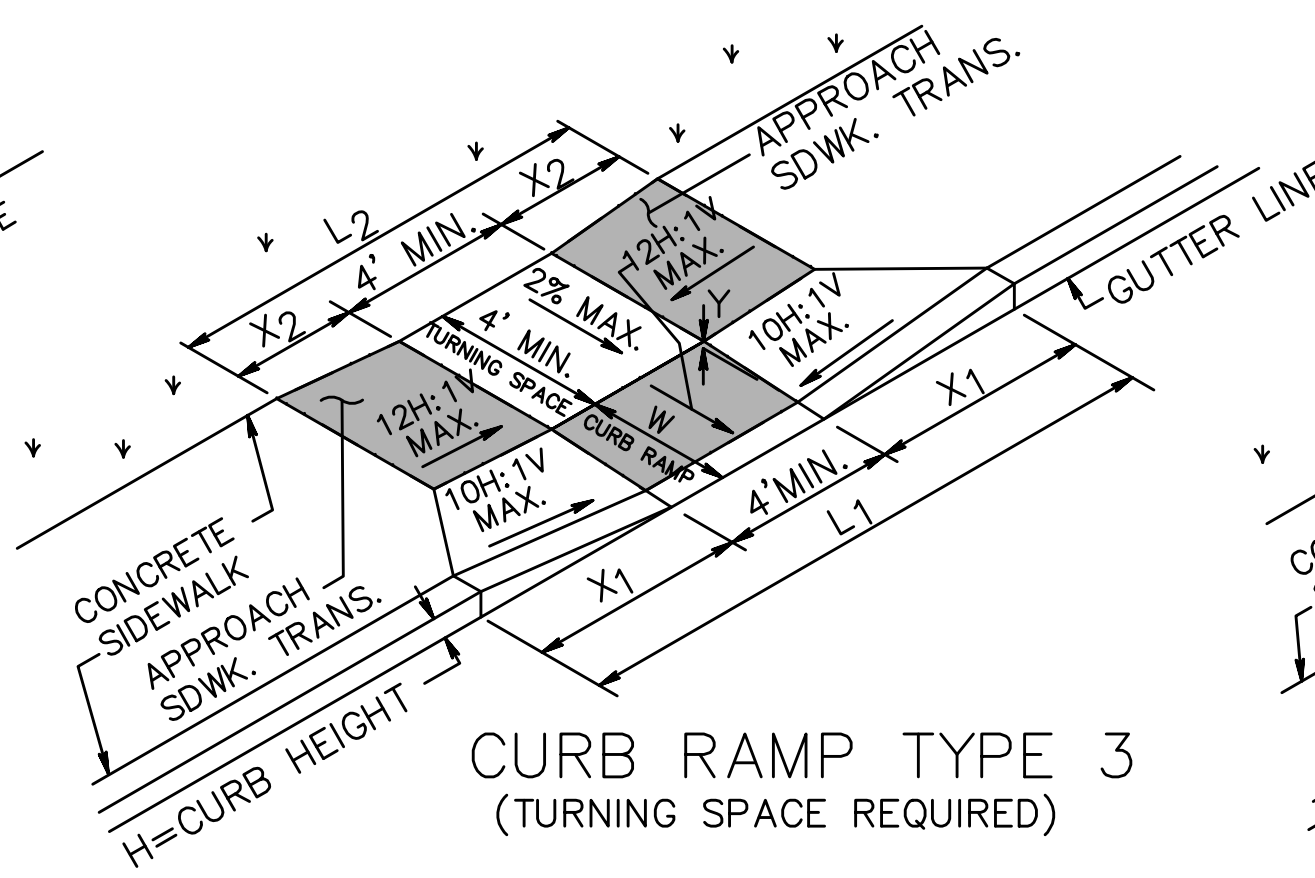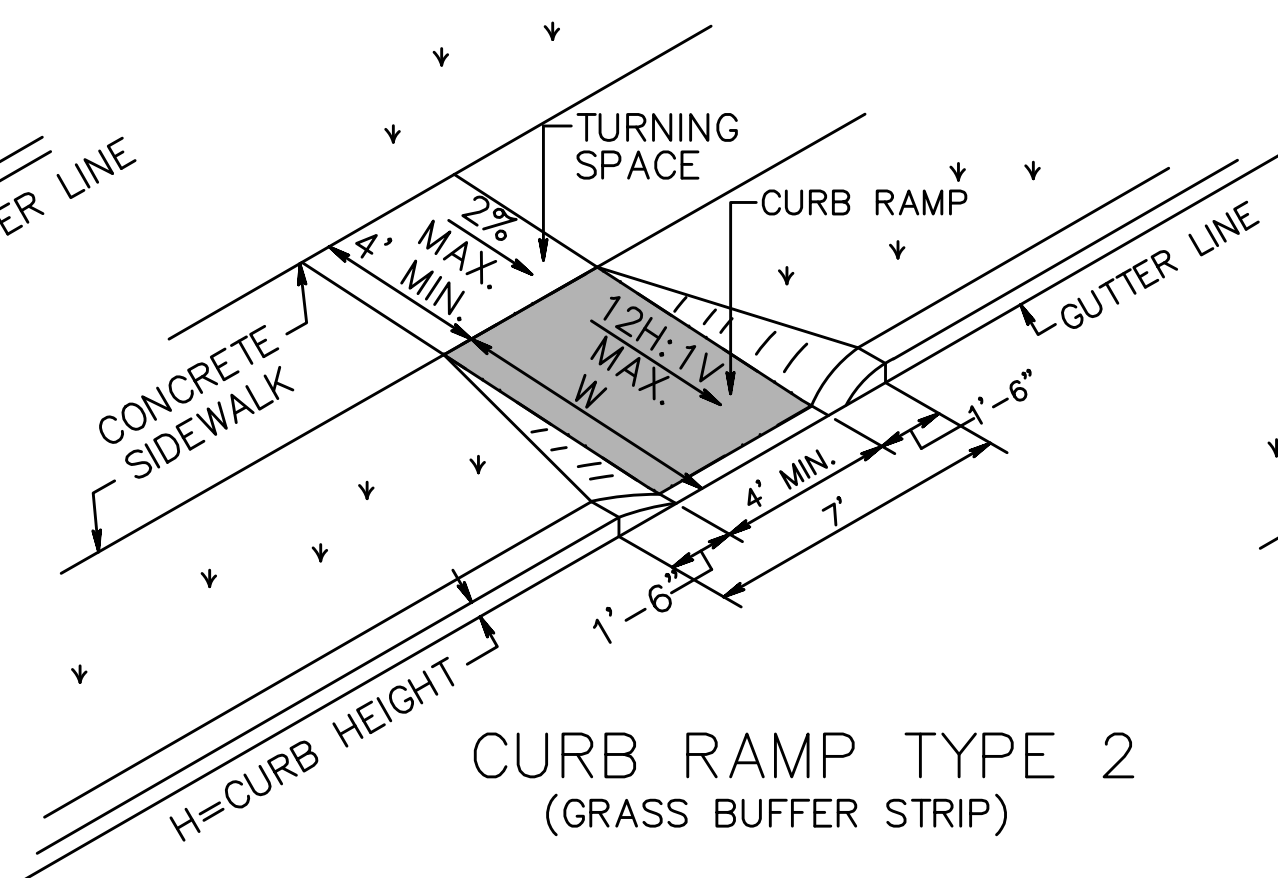
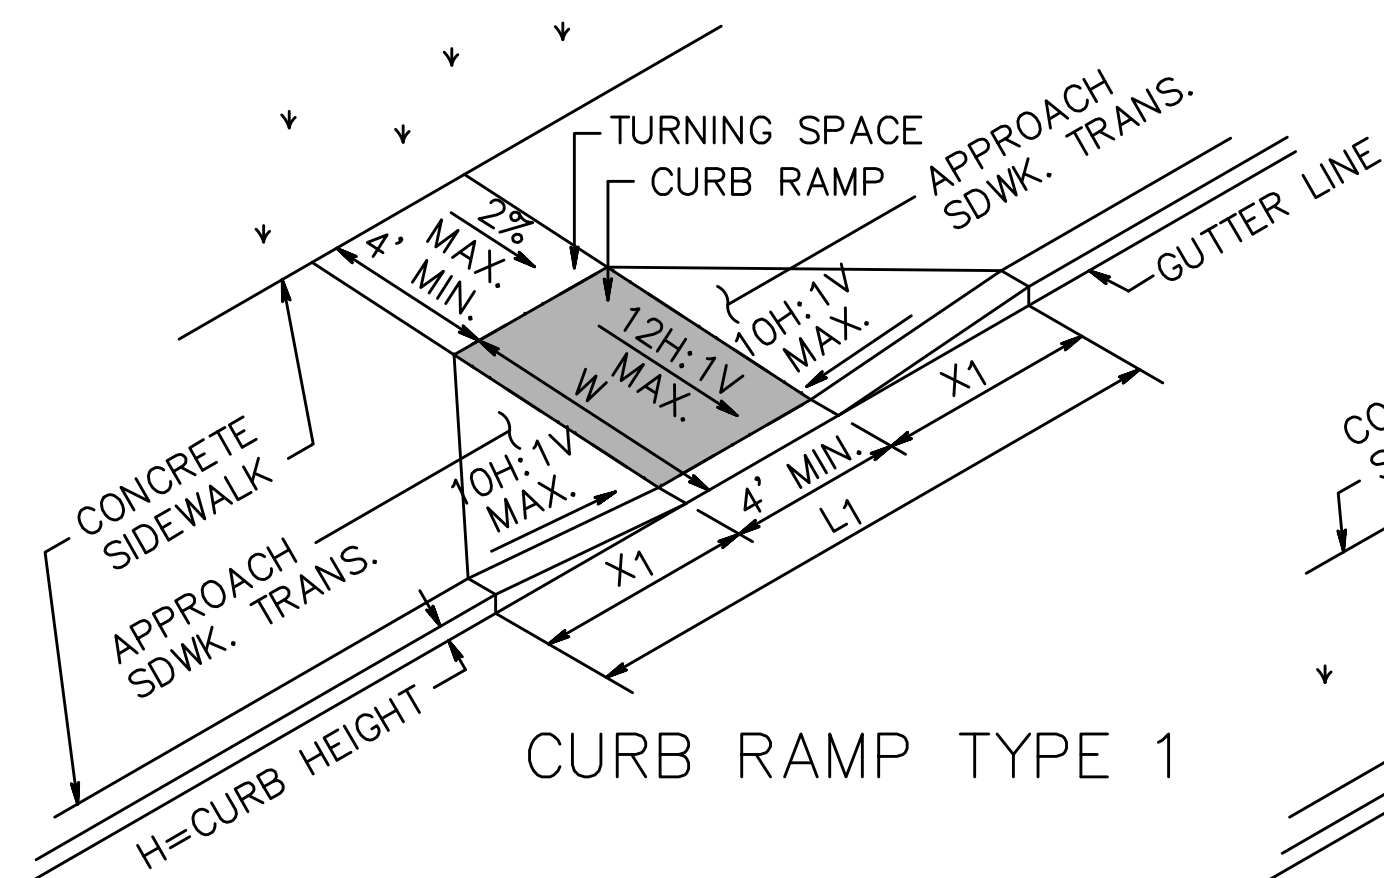


CURB RAMP TYPE 5


CURB RAMP TYPE 6

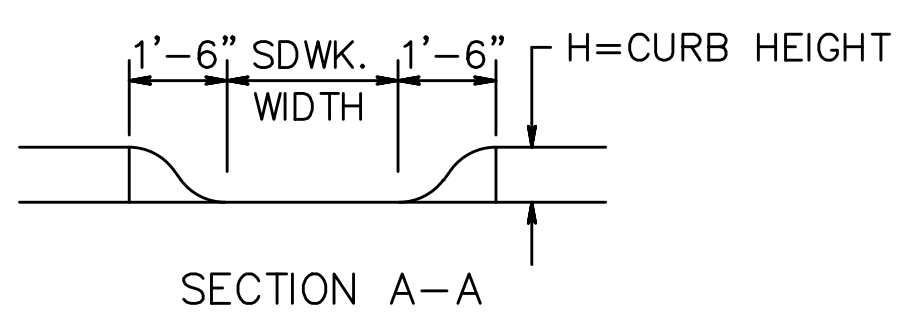

NOTE:  
CURB RAMP OPENING TO BE FLUSH WITH ROADWAY PAVEMENT (CURB RAMP TYPES 5 & 6).

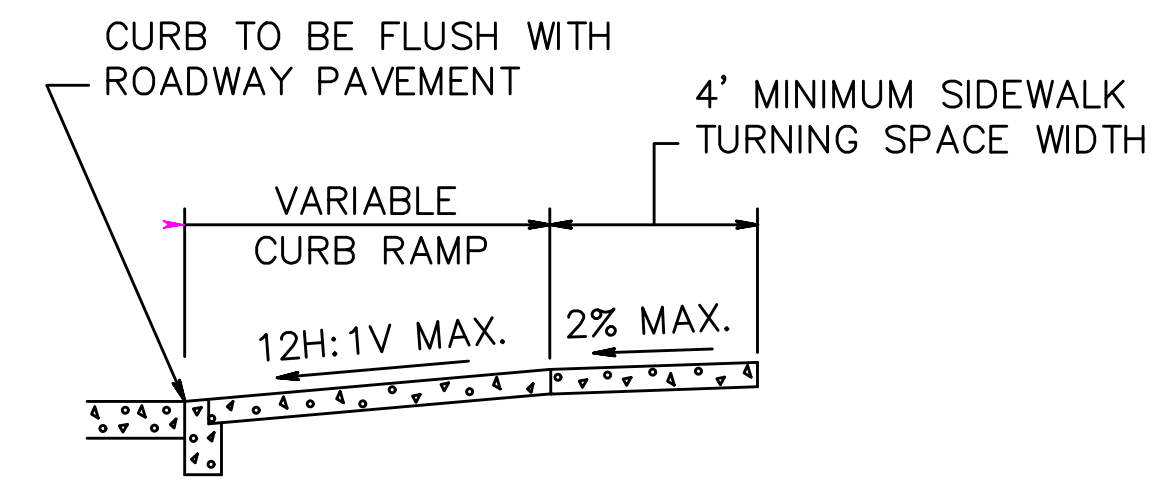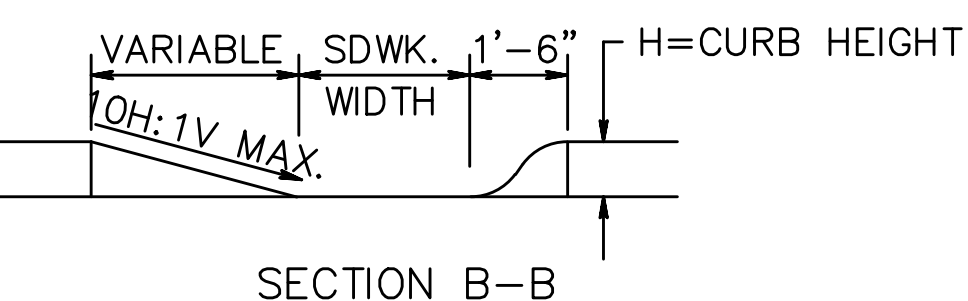

SECTION THROUGH CURB RAMPS 1 THROUGH 4

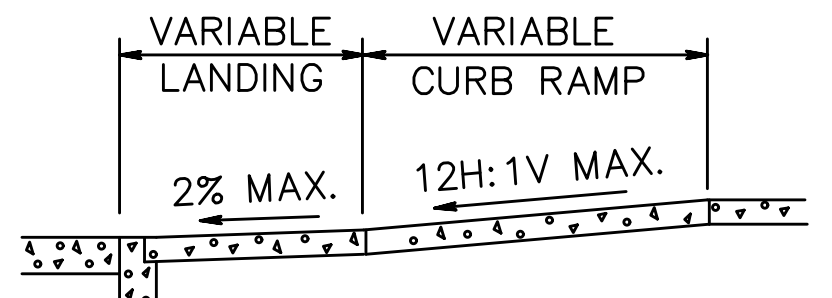


SECTION THROUGH CURB RAMPS 5 AND 6

- NOTES:
1. KEEP TURNING SPACE, APPROACH SIDEWALK TRANSITIONS, AND CURB RAMP CLEAR OF OBSTRUCTIONS THAT PROTRUDE ABOVE THE SIDEWALK.
  2. FOR DIMENSIONS SEE CD-606-1B AND CD-606-1C.
  3. CURB (DROPPED CURB) GUTTERLINE TO BE FLUSH WITH ROADWAY PAVEMENT A MINIMUM OF 4 FEET AT ALL CURB RAMPS.
  4. FOR CURB RAMP TYPES 5 AND 6, IF A GRASS BUFFER DOES NOT EXIST, SLOPE CURB TO EQUAL SLOPE OF ADJACENT CURB RAMP.
  5. SIDEWALK AND CURB RAMP WITHIN AREA ENCLOSED BY HEAVY LINES INDICATES THE PAY LIMIT FOR CONCRETE SIDEWALK OF THE APPROPRIATE ADJACENT THICKNESS.
  6. CURB AND HEADER WITHIN AREA ENCLOSED BY HEAVY LINES INDICATES THE PAY LIMIT FOR VERTICAL CURB OR SLOPING CURB OF THE APPROPRIATE ADJACENT SIZE AND KIND.
  7. WHERE THE DISTANCE FROM THE GUTTER LINE TO THE OUTSIDE EDGE OF SIDEWALK IS 6 FEET OR LESS, USE CURB RAMP TYPE 7, INSTEAD OF CURB RAMP TYPE 1 THROUGH 4.
  8. CROSSWALKS AND STOP LINES MAY BE MARKED OR UNMARKED. SEE PLANS.
  9. DIMENSIONS SHOWN IN TABLES ARE FOR 3 INCH TO 9 INCH CURB HEIGHTS. WHERE THE CURB HEIGHTS ARE OTHER THAN WHAT IS PROVIDED IN THE TABLES, THE DIMENSIONS OF THE RAMPS WILL HAVE TO BE CALCULATED BASED ON CROSS SLOPES SHOWN.
  10. THE 12H:1V MAX SLOPE IS THE RUNNING SLOPE FOR CURB RAMPS, BUT ONLY THE 12H:1V SLOPE MEASURED AS X2 IS THE RUNNING SLOPE FOR TYPE 3 AND TYPE 4 CURB RAMPS. ENSURE THE RUNNING SLOPE OF CURB RAMPS DOES NOT REQUIRE ITS LENGTH TO EXCEED 15 FEET. THE RUNNING SLOPE MAY EXCEED THE 12H:1V MAX SLOPE SO AS NOT TO EXCEED THE 15 FEET MAXIMUM LENGTH.

CURB RAMP NOTES:

1. THE MAXIMUM CROSS SLOPE OF SIDEWALKS SHALL BE 2%.
2. THE MAXIMUM LONGITUDINAL TRANSITION SLOPE OF SIDEWALKS SHALL BE 5%.
3. THE MAXIMUM LONGITUDINAL SLOPE OF CURB RAMPS SHALL BE 8%.
4. THE CONTRACTOR SHALL MAINTAIN POSITIVE DRAINAGE ALONG ALL SIDEWALKS, CURB RAMPS AS WELL ADJACENT TO ALL SIDEWALKS. STORMWATER RUNOFF SHALL NOT BE BLOCKED BY SIDEWALKS OR CURBS.
5. FOR TYPE 5 & TYPE 6 RAMPS, LEADING EDGE OF DETECTABLE WARNING SURFACE MUST BE LOCATED A MAXIMUM OF 5 FEET FROM EDGE OF TRAVELWAY - THIS REQUIREMENT MAY WARRANT MULTIPLE DETECTABLE WARNING SURFACES FOR A SINGLE RAMP.
6. THERE MUST BE A MINIMUM OF 24 INCH OF DETECTABLE WARNING SURFACE IN THE DIRECTION OF PEDESTRIAN TRAVEL, THE FULL WIDTH OF THE SIDEWALK - THIS REQUIREMENT MAY WARRANT MULTIPLE DETECTABLE WARNING SURFACES FOR A SINGLE RAMP.
7. A MINIMUM 4' X 4' LANDING AREA, GRADED AT A MAXIMUM SLOPE OF 2% IN ALL DIRECTIONS, MUST BE PROVIDED AT THE TOP OF EVERY RAMP.

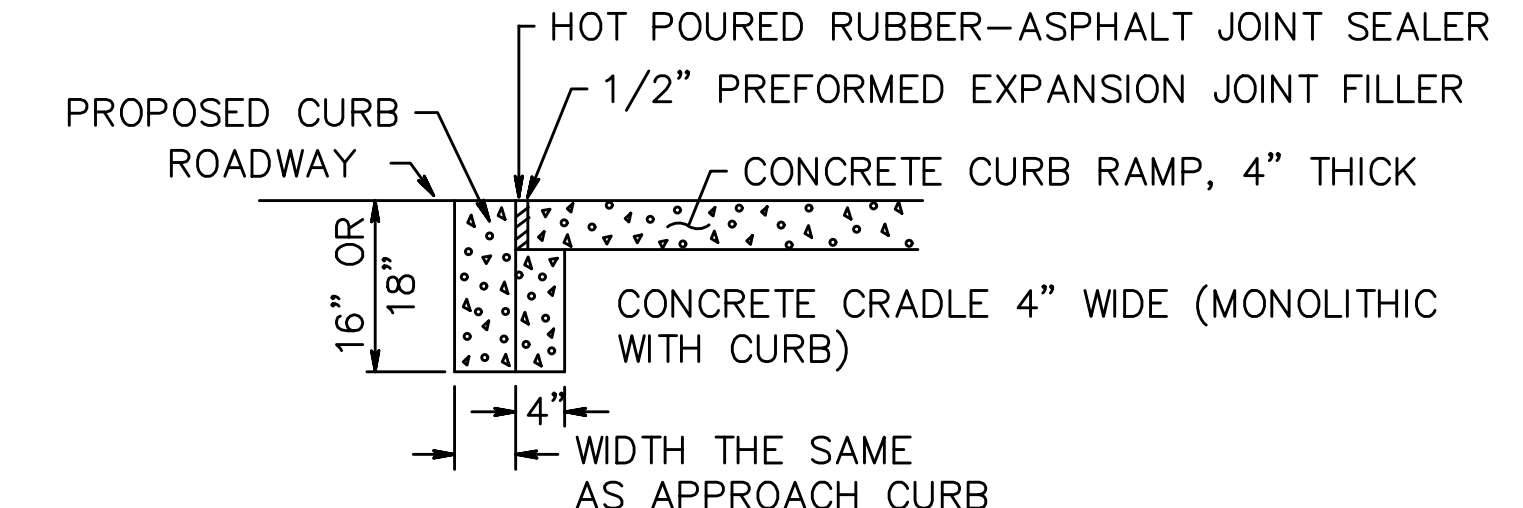

DROPPED CURB AND CRADLE

CONCRETE SIDEWALK  
(PUBLIC SIDEWALK CURB RAMP)  
N.T.S.

CD-606-1



NEW JERSEY DEPARTMENT OF TRANSPORTATION

CONSTRUCTION DETAILS



CURB RAMPS

CD-606-1.1




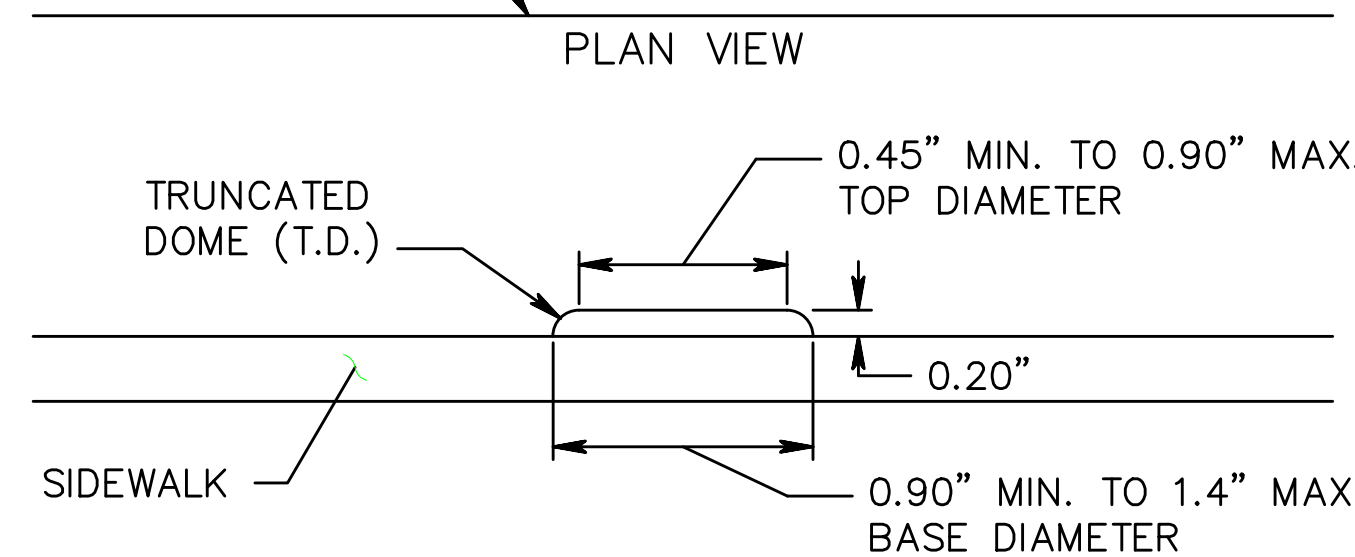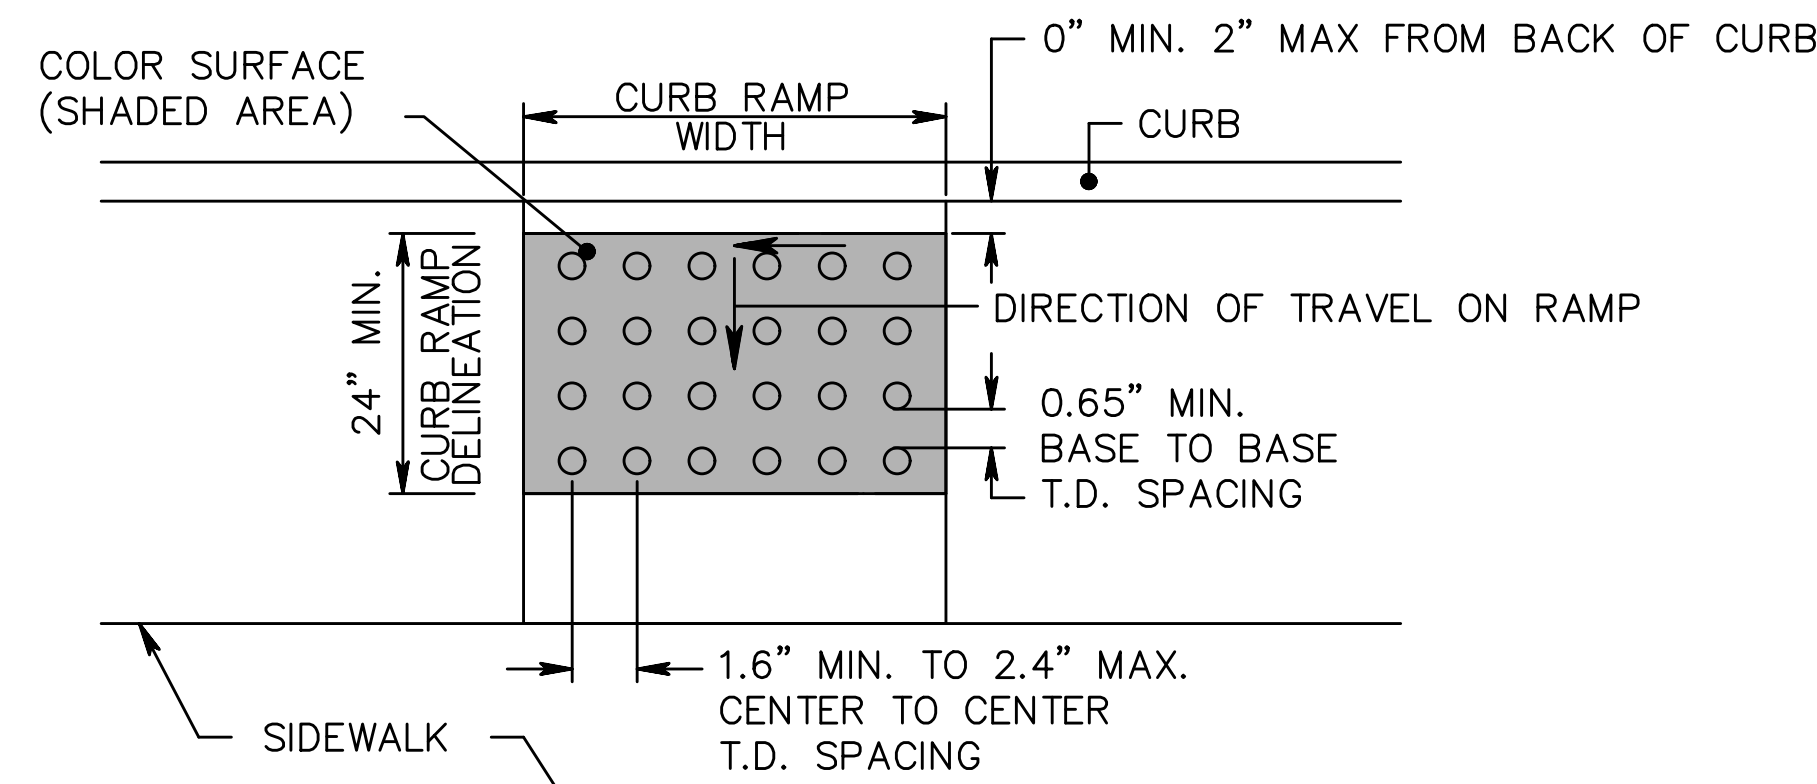



ELEVATION  
DETECTABLE WARNING SURFACE

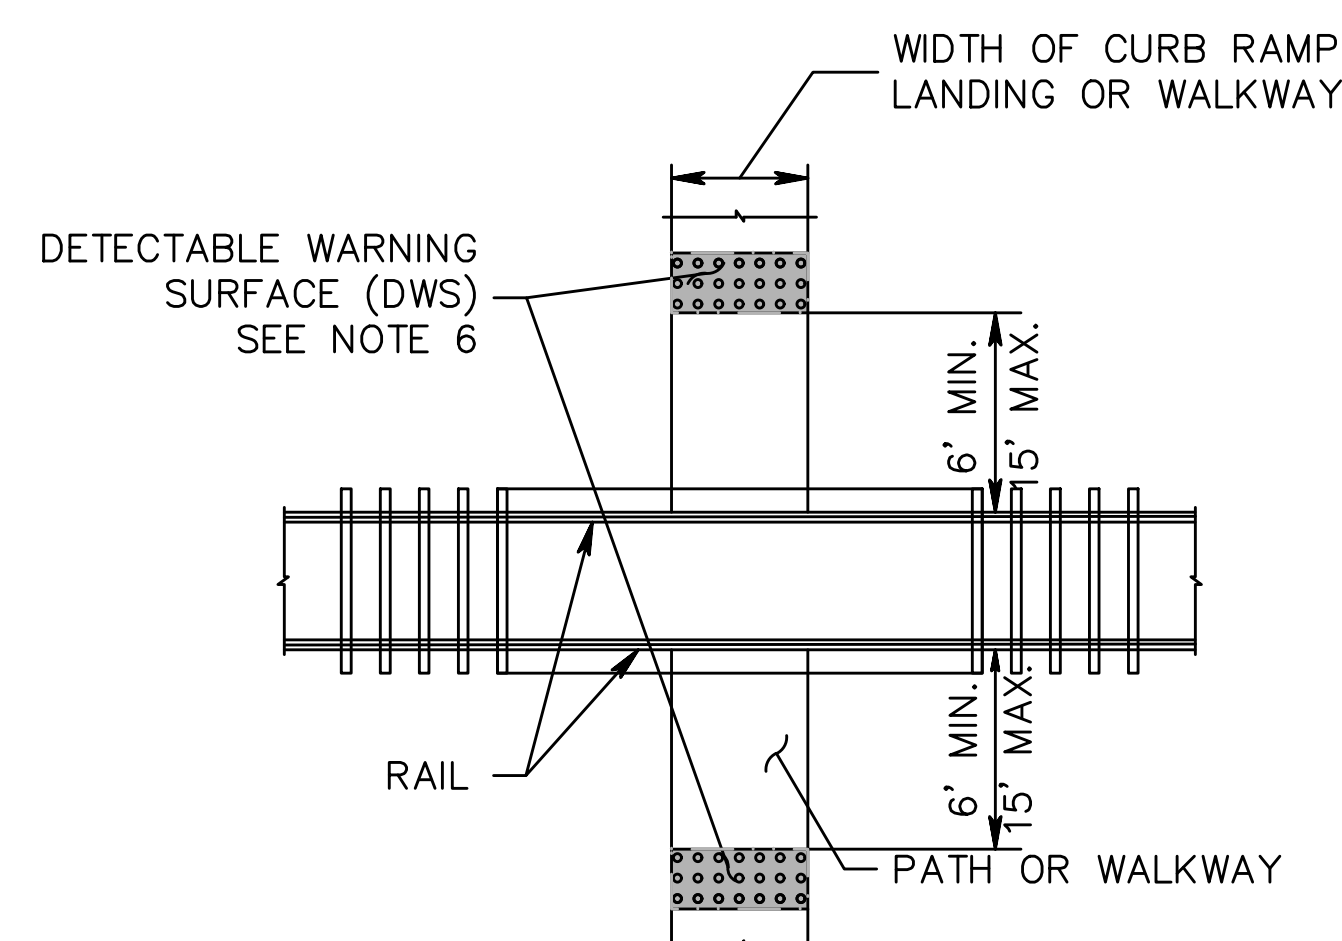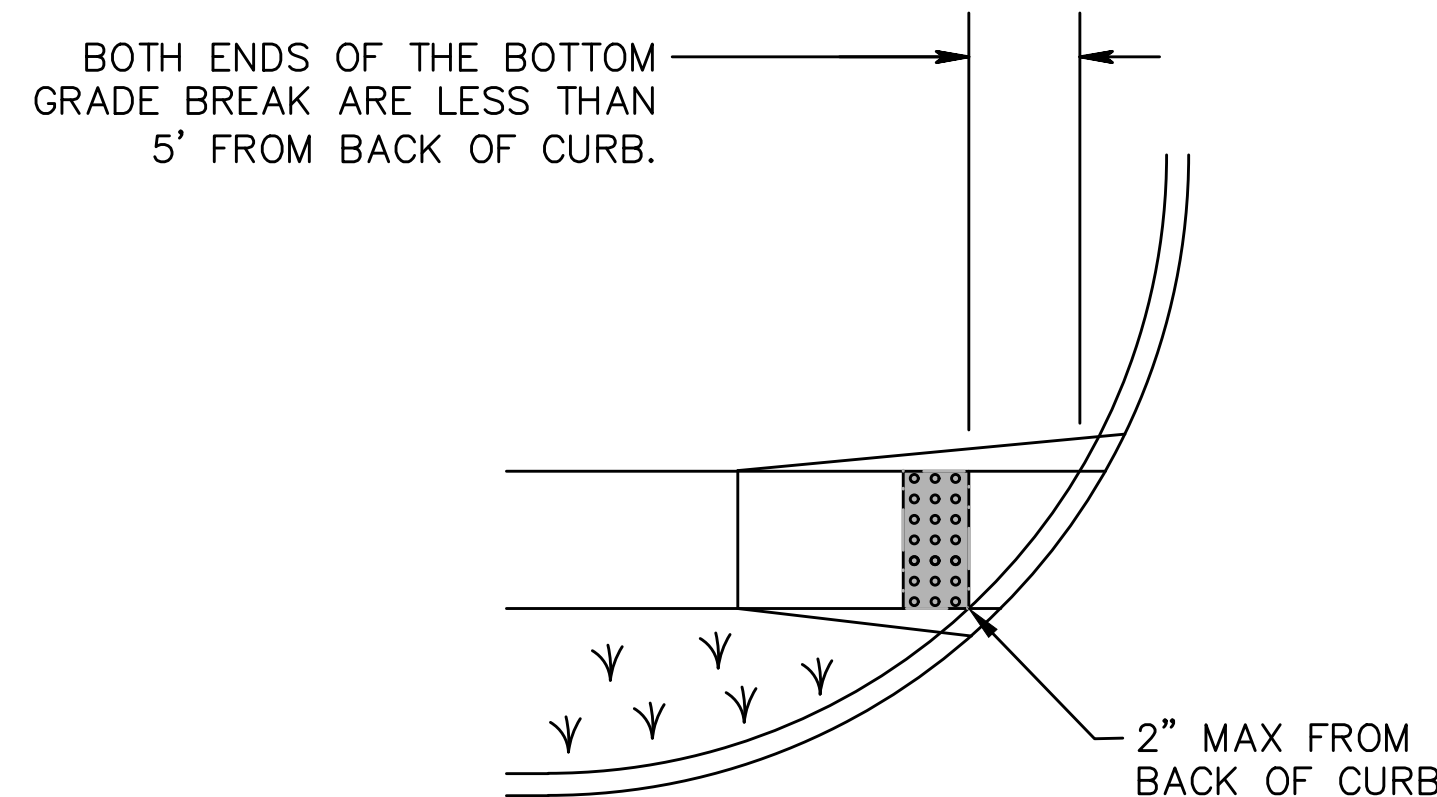


PEDESTRIAN RAILROAD CROSSING

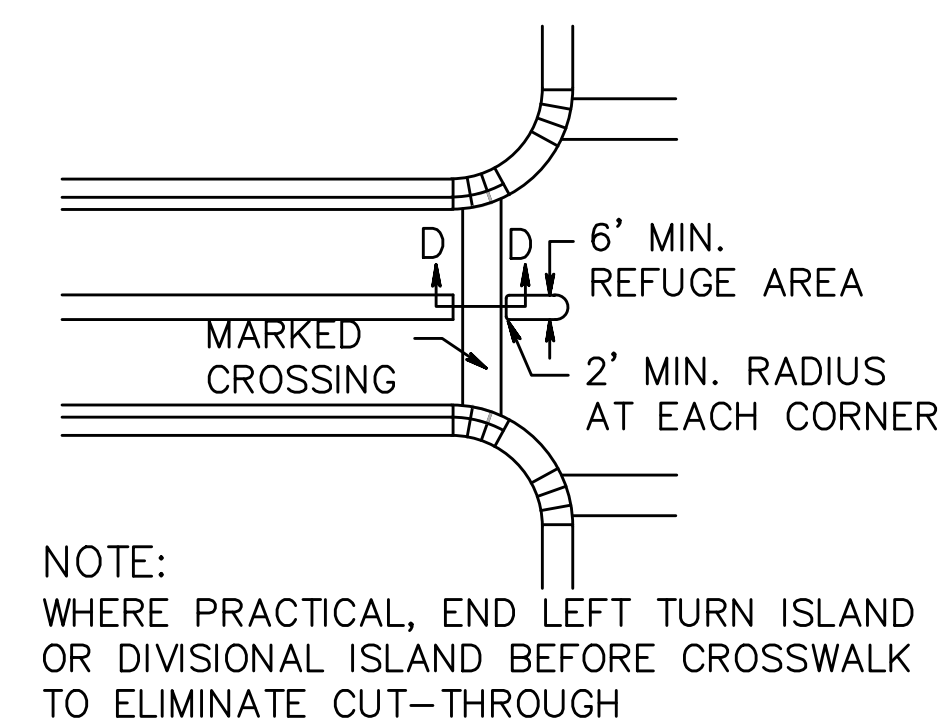

PEDESTRIAN REFUGE ISLAND WALKWAY  
OPENING AT INTERSECTIONS

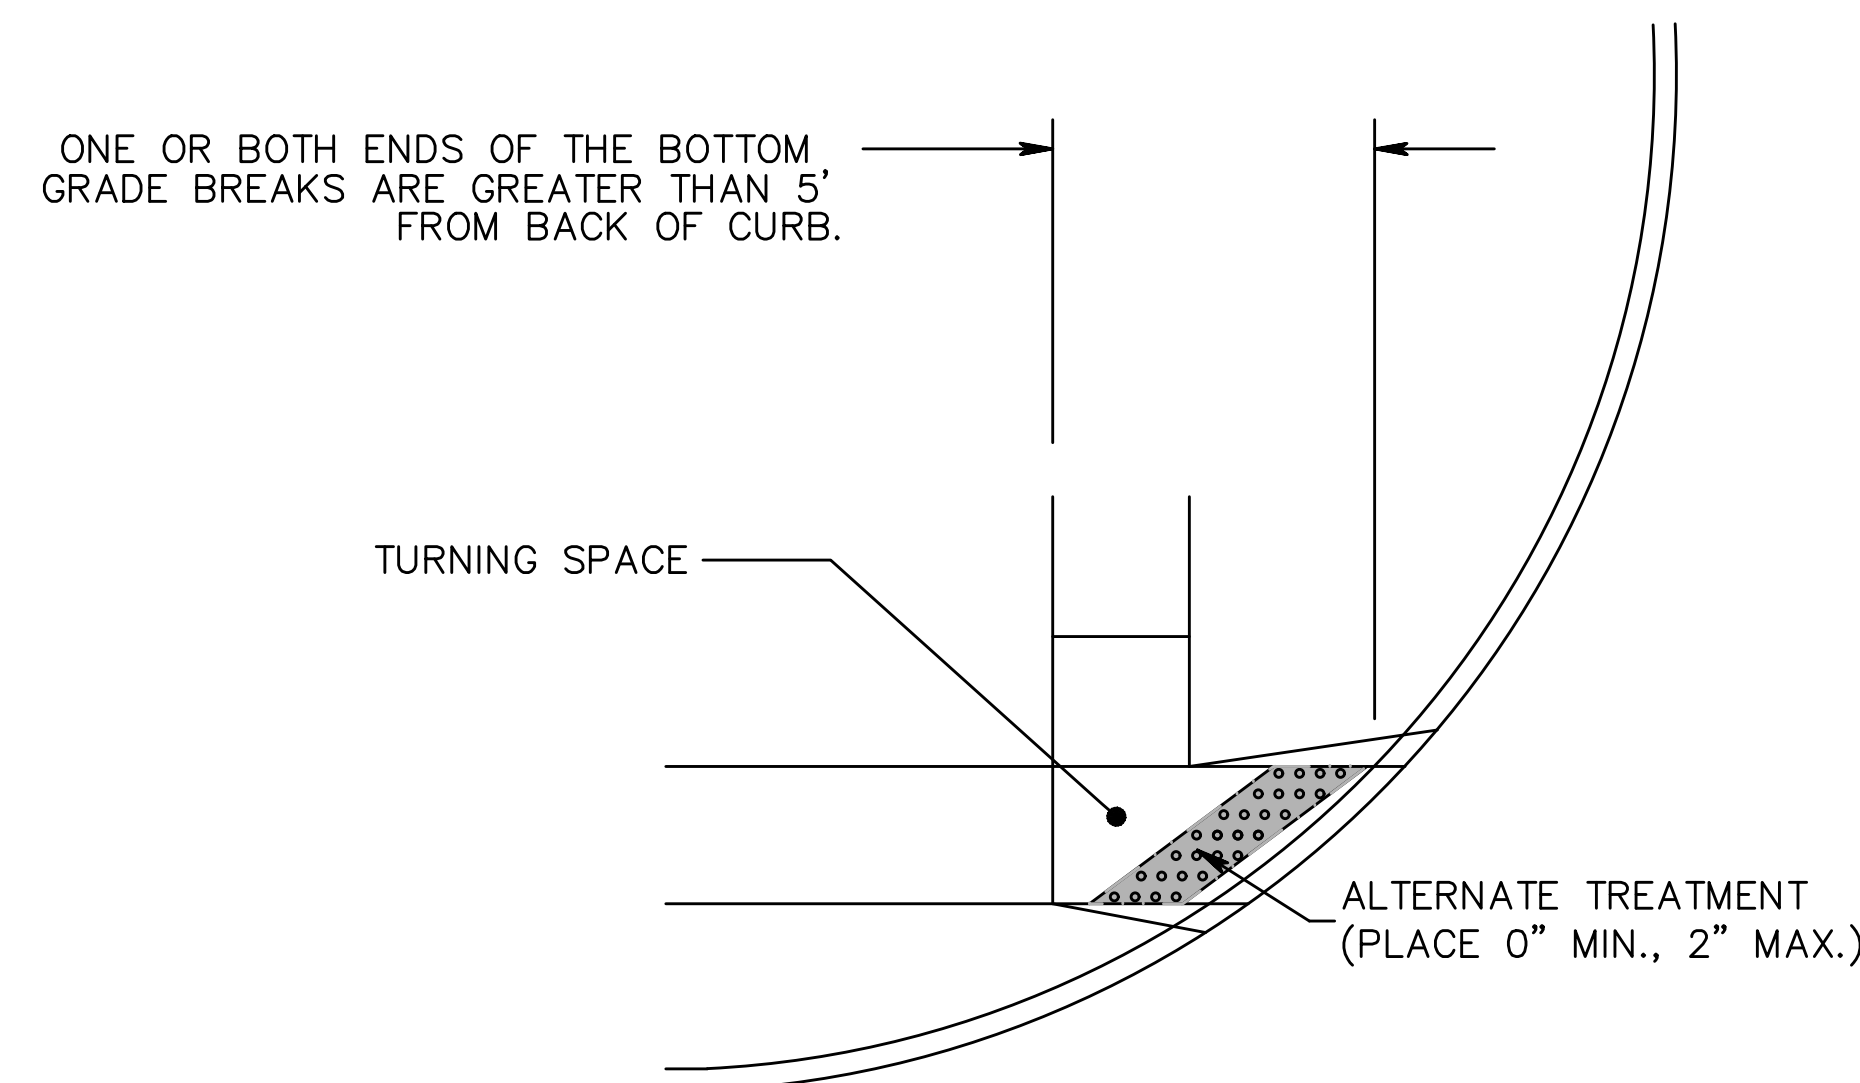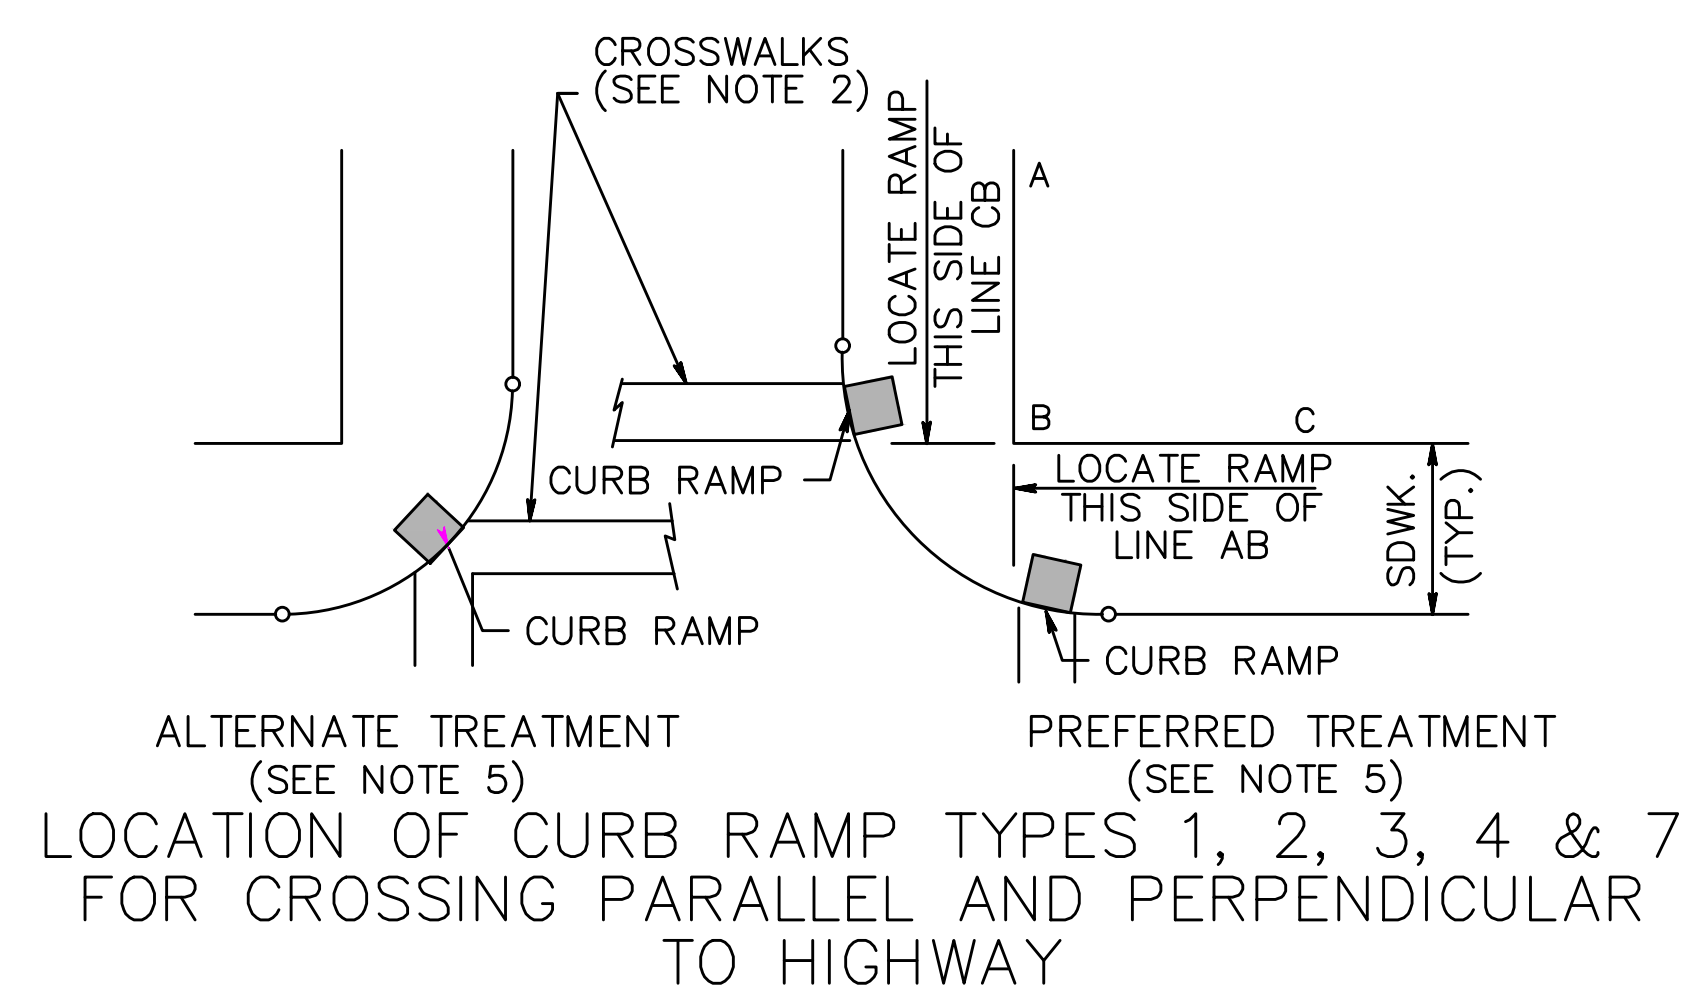

PLACEMENT OF DETECTABLE WARNING SURFACE  
FOR CURB RAMP TYPE 5 AND 6

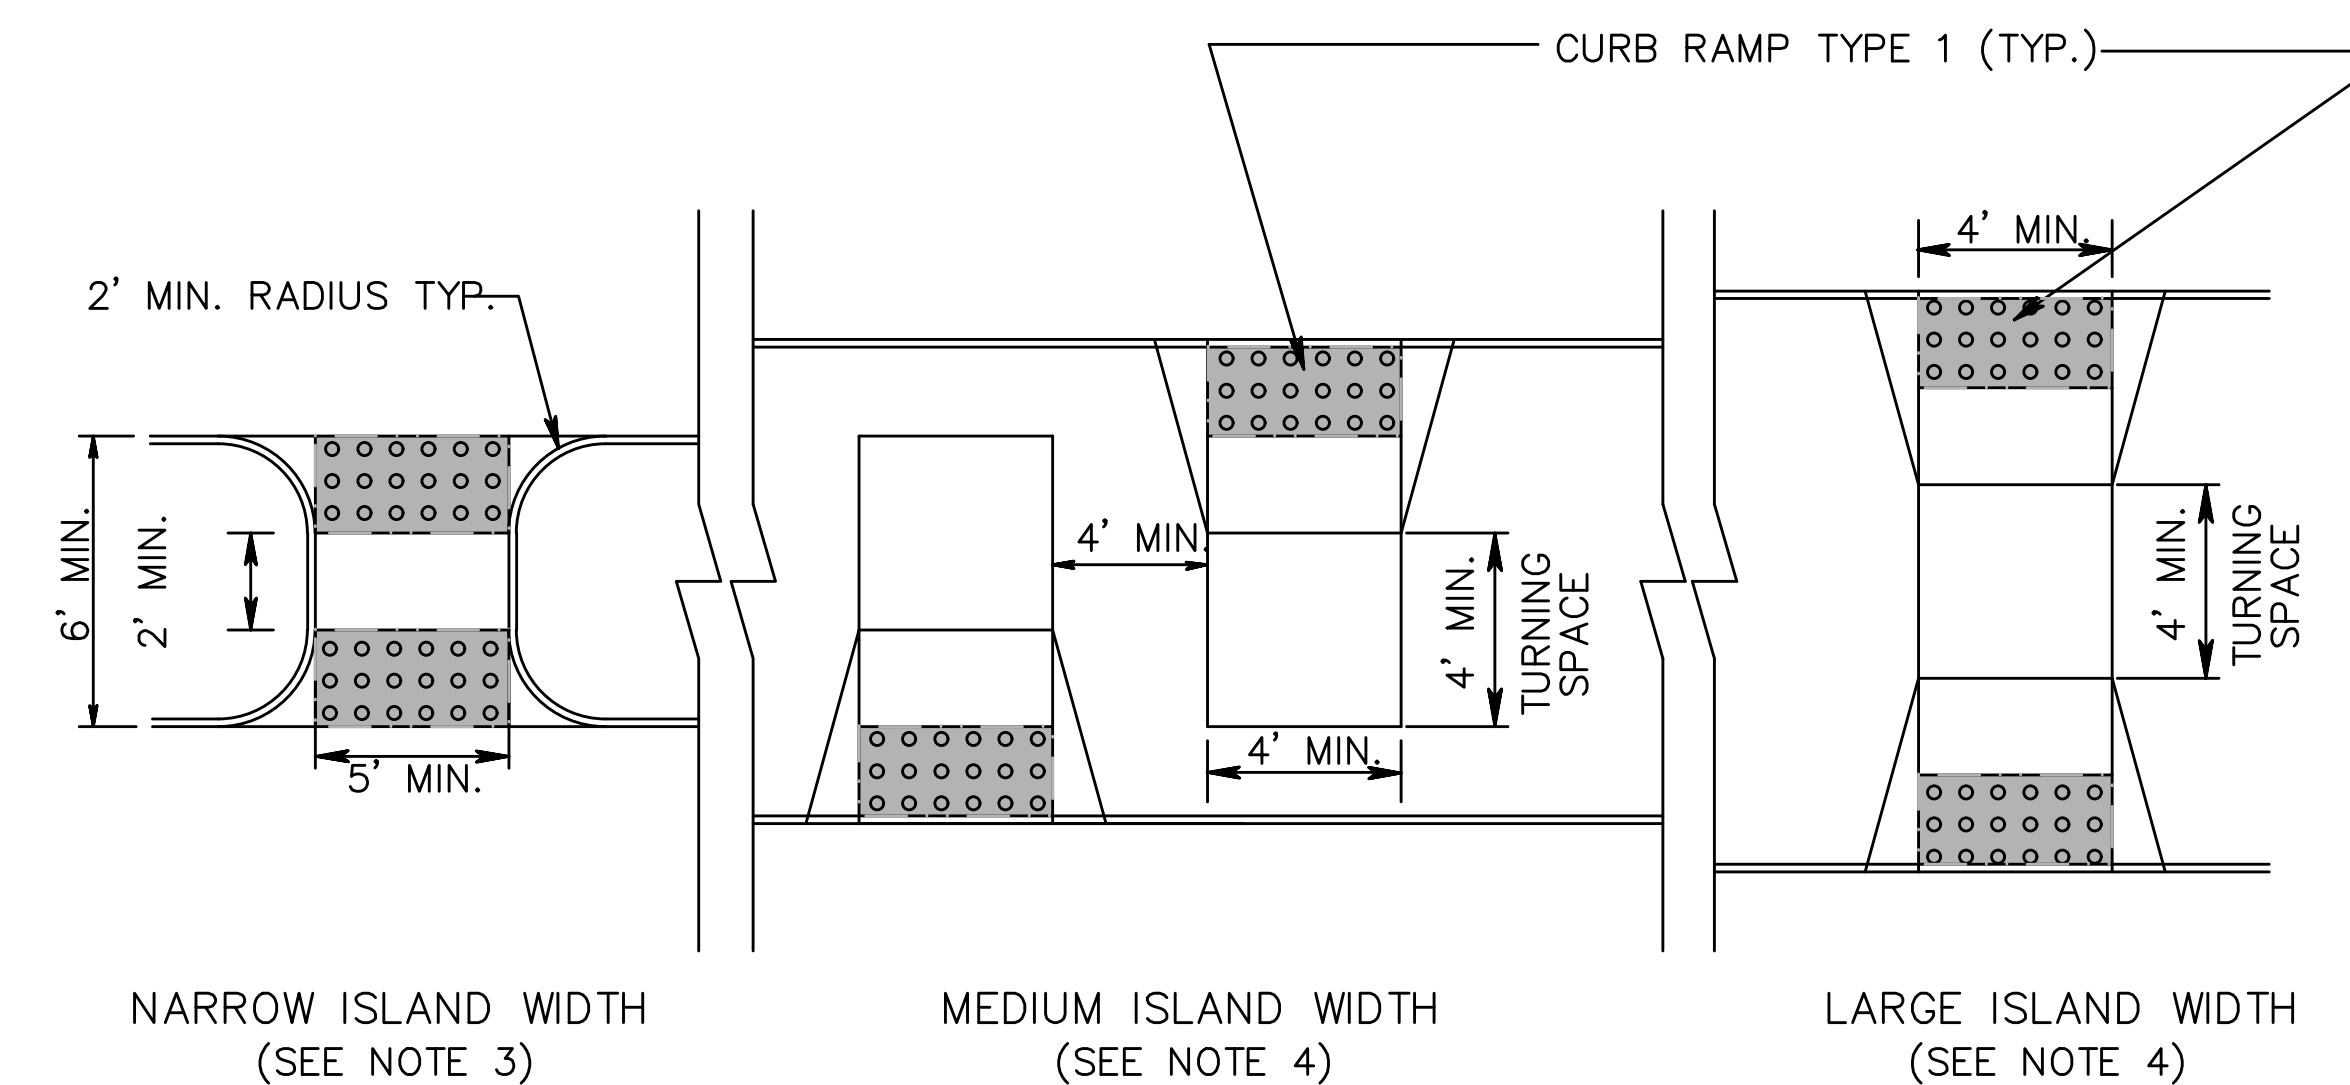

PEDESTRIAN REFUGE ISLAND

DETECTABLE WARNING SURFACE  
N.T.S.

- NOTES:
1. KEEP TURNING SPACE, APPROACH SIDEWALK TRANSITIONS, AND CURB RAMP CLEAR OF OBSTRUCTIONS THAT PROTRUDE ABOVE THE SIDEWALK.
  2. CROSSWALKS AND STOP LINES MAY BE MARKED OR UNMARKED, SEE PLANS.
  3. FOR NARROW ISLAND WIDTH, SEE PEDESTRIAN REFUGE ISLAND WALKWAY OPENING AT INTERSECTIONS DETAIL.
  4. FOR MEDIUM AND LARGE ISLAND WIDTH, SEE CURB RAMP TYPE 1 ON CD-606-1.
  5. CONSTRUCT CURB RAMP TYPES 1, 2, 3, 4 & 7 PERPENDICULAR TO CURBLINE, AS SHOWN.
  6. IF A CURB RAMP IS REQUIRED, THE LOCATION OF THE DETECTABLE WARNING SURFACE MUST BE AT THE BOTTOM OF THE RAMP AND WITHIN THE REQUIRED DISTANCE FROM THE RAIL.

NEW JERSEY DEPARTMENT OF TRANSPORTATION

CONSTRUCTION DETAILS

CD-606-1.1A

27  
36



CURB RAMP TYPE 1

0.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	3	2.50	2.50	9.00
4	4	3.33	3.33	10.67
5	5	4.17	4.17	12.33
6	6	5.00	5.00	14.00
7	7	5.83	5.83	15.67
8	8	6.67	6.67	17.33
9	9	7.50	7.50	19.00

1.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	3	2.78	2.27	9.05
4	4	3.70	3.03	10.73
5	5	4.63	3.79	12.42
6	6	5.56	4.55	14.10
7	7	6.48	5.30	15.78
8	8	7.41	6.06	17.47
9	9	8.33	6.82	19.15

2.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	3	3.13	2.08	9.21
4	4	4.17	2.78	10.94
5	5	5.21	3.47	12.68
6	6	6.25	4.17	14.42
7	7	7.29	4.86	16.15
8	8	8.33	5.56	17.89
9	9	9.38	6.25	19.63

3.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	3	3.57	1.92	9.49
4	4	4.76	2.56	11.33
5	5	5.95	3.21	13.16
6	6	7.14	3.85	14.99
7	7	8.33	4.49	16.82
8	8	9.52	5.13	18.65
9	9	10.71	5.77	20.48

4.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	3	4.17	1.79	9.95
4	4	5.56	2.38	11.94
5	5	6.94	2.98	13.92
6	6	8.33	3.57	15.90
7	7	9.72	4.17	17.89
8	8	11.11	4.76	19.87
9	9	12.50	5.36	21.86

5.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	3	5.00	1.67	10.67
4	4	6.67	2.22	12.89
5	5	8.33	2.78	15.11
6	6	10.00	3.33	17.33
7	7	11.67	3.89	19.56
8	8	13.33	4.44	21.78
9	9	15.00	5.00	24.00

6.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	3	6.25	1.56	11.81
4	4	8.33	2.08	14.42
5	5	10.42	2.60	17.02
6	6	12.50	3.13	19.63
7	7	14.58	3.65	22.23
8	8	15.00	4.17	23.17
9	9	15.00	4.69	23.69

0.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	3	8.33	1.47	13.80
4	4	11.11	1.96	17.07
5	5	13.89	2.45	20.34
6	6	15.00	2.94	21.94
7	7	15.00	3.43	22.43
8	8	15.00	3.92	22.92
9	9	15.00	4.41	23.41

CURB RAMP TYPE 2

0.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	3	1.50	1.50	7.00
4	4	1.50	1.50	7.00
5	5	1.50	1.50	7.00
6	6	1.50	1.50	7.00
7	7	1.50	1.50	7.00
8	8	1.50	1.50	7.00
9	9	1.50	1.50	7.00

CURB RAMP TYPE 2

NOTES:

- FOR CURB RAMP TYPES, SEE CD-606-1.
- THE ABOVE TABLES ARE BASED ON THE SPECIFIC GUTTER PROFILE REFERENCED. THEY DO NOT TAKE INTO ACCOUNT VARIATIONS IN THE GUTTER PROFILE. THE ABOVE TABLES TO BE USED BY THE DESIGNERS AND CONTRACTORS TO GET APPROXIMATE DIMENSIONS OF THE CURB RAMP AT EACH LOCATION. FINAL DIMENSIONS WILL BE DETERMINED BY ACTUAL MEASUREMENTS IN THE FIELD DURING CONSTRUCTION.
- THE 12H:1V MAX SLOPE IS THE RUNNING SLOPE FOR CURB RAMPS, BUT ONLY THE 12H:1V SLOPE MEASURED AS X IS THE RUNNING SLOPE FOR TYPE 3 AND TYPE 4 CURB RAMPS. ENSURE THE RUNNING SLOPE OF CURB RAMPS DOES NOT REQUIRE ITS LENGTH TO EXCEED 15 FEET. THE RUNNING SLOPE MAY EXCEED THE 12H:1V MAX SLOPE SO AS NOT TO EXCEED THE 15 FEET MAXIMUM LENGTH. THE TABLES ALREADY APPLY THE 15 FEET RULE FOR THOSE CALCULATED LENGTHS WHICH EXCEED 15 FEET.

0.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	2.5	2.50	2.50	9.00
4	2.5	3.33	3.33	10.67
5	2.5	4.17	4.17	12.33
6	2.5	5.00	5.00	14.00
7	2.5	5.83	5.83	15.67
8	2.5	6.67	6.67	17.33
9	2.5	7.50	7.50	19.00
3	3.0	3.33	3.33	10.67
4	3.0	4.17	4.17	12.33
5	3.0	5.00	5.00	14.00
6	3.0	5.83	5.83	15.67
7	3.0	6.67	6.67	17.33
8	3.0	7.50	7.50	19.00
9	3.0	8.33	6.82	19.15
3	3.5	5.00	5.00	14.00
4	3.5	5.83	5.83	15.67
5	3.5	6.67	6.67	17.33
6	3.5	7.50	7.50	19.00
7	3.5	8.33	6.82	19.15
8	3.5	9.17	6.34	18.62
9	3.5	10.00	5.83	18.09
3	4.0	5.00	5.00	14.00
4	4.0	5.83	5.83	15.67
5	4.0	6.67	6.67	17.33
6	4.0	7.50	7.50	19.00
7	4.0	8.33	6.82	19.15
8	4.0	9.17	6.34	18.62
9	4.0	10.00	5.83	18.09

4.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	2.5	4.17	1.79	9.95
4	2.5	5.56	2.38	11.94
5	2.5	6.94	2.98	13.92
6	2.5	8.33	3.57	15.90
7	2.5	9.72	4.17	17.89
8	2.5	11.11	4.76	19.87
9	2.5	12.50	5.36	21.86
3	3.0	5.56	2.38	11.94
4	3.0	6.94	2.98	13.92
5	3.0	8.33	3.57	15.90
6	3.0	9.72	4.17	17.89
7	3.0	11.11	4.76	19.87
8	3.0	12.50	5.36	21.86
9	3.0	13.89	5.83	22.34
3	3.5	6.67	2.22	12.89
4	3.5	8.33	2.78	15.11
5	3.5	10.00	3.33	17.33
6	3.5	11.67	3.89	19.56
7	3.5	13.33	4.44	21.78
8	3.5	15.00	5.00	24.00
9	3.5	16.67	5.56	25.56
3	4.0	7.50	2.94	21.94
4	4.0	9.17	3.43	22.43
5	4.0	10.83	3.92	22.92
6	4.0	12.50	4.41	23.41
7	4.0	14.17	4.90	23.90
8	4.0	15.83	5.39	24.39
9	4.0	17.50	5.88	24.88

1.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	2.5	2.78	2.27	9.05
4	2.5	3.70	3.03	10.73
5	2.5	4.63	3.79	12.42
6	2.5	5.56	4.55	14.10
7	2.5	6.48	5.30	15.78
8	2.5	7.41	6.06	17.47
9	2.5	8.33	6.82	19.15
3	3.0	2.78	2.27	9.05
4	3.0	3.70	3.03	10.73
5	3.0	4.63	3.79	12.42
6	3.0	5.56	4.55	14.10
7	3.0	6.48	5.30	15.78
8	3.0	7.41	6.06	17.47
9	3.0	8.33	6.82	19.15
3	3.5	3.70	3.03	10.73
4	3.5	4.63	3.79	12.42
5	3.5	5.56	4.55	14.10
6	3.5	6.48	5.30	15.78
7	3.5	7.41	6.06	17.47
8	3.5	8.33	6.82	19.15
9	3.5	9.17	6.34	18.62
3	4.0	4.63	3.79	12.42
4	4.0	5.56	4.55	14.10
5	4.0	6.48	5.30	15.78
6	4.0	7.41	6.06	17.47
7	4.0	8.33	6.82	19.15
8	4.0	9.17	6.34	18.62
9	4.0	10.00	5.83	18.09

5.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	2.5	5.00	1.67	10.67
4	2.5	6.67	2.22	12.89
5	2.5	8.33	2.78	15.11
6	2.5	10.00	3.33	17.33
7	2.5	11.67	3.89	19.56
8	2.5	13.33	4.44	21.78
9	2.5	15.00	5.00	24.00
3	3.0	5.00	1.67	10.67
4	3.0	6.67	2.22	12.89
5	3.0	8.33	2.78	15.11
6	3.0	10.00	3.33	17.33
7	3.0	11.67	3.89	19.56
8	3.0	13.33	4.44	21.78
9	3.0	15.00	5.00	24.00
3	3.5	6.67	2.22	12.89
4	3.5	8.33	2.78	15.11
5	3.5	10.00	3.33	17.33
6	3.5	11.67	3.89	19.56
7	3.5	13.33	4.44	21.78
8	3.5	15.00	5.00	24.00
9	3.5	16.67	5.56	25.56
3	4.0	7.50	2.94	21.94
4	4.0	9.17	3.43	22.43
5	4.0	10.83	3.92	22.92
6	4.0	12.50	4.41	23.41
7	4.0	14.17	4.90	23.90
8	4.0	15.83	5.39	24.39
9	4.0	17.50	5.88	24.88

2.0% GUTTER LINE PROFILE				
H INCHES	W FEET	X1u FEET	X1L FEET	Lz FEET
3	2.5	3.13	2.08	9.21
4	2.5	4.17	2.78	10.94
5	2.5	5.21	3.47	12.68
6	2.5	6.25	4.17	14.42
7	2.5	7.29	4.86	16.15
8	2.5	8.23	5.56	17.89
9	2.5	9.38	6.25	19.63
3	3.0	3.13	2.08	9.21
4	3.0	4.17	2.78	10.94
5	3.0	5.21	3.47	12.68
6	3.0	6.25	4.17	14.42
7	3.0	7.29	4.86	16.15
8	3.0	8.23	5.56	17.89
9	3.0	9.38	6.25	19.63
3	3.5	4.17	2.78	10.94
4	3.5	5.21	3.47	12.68
5	3.5	6.25	4.17	14.42
6	3.5	7.29	4.86	16.15
7	3.5	8.23	5.56	17.89
8	3.5	9.27	6.25	19.63
9	3.5	10.31	6.94	21.37
3	4.0	5.21	3.47	12.68
4	4.0	6.25	4.17	14.42
5	4.0	7.29	4.86	16.15
6	4.0	8.33	5.56	17.89
7	4.0	9.38	6.25	19.63
8	4.0	10.42	6.94	21.37
9	4.0	11.46	7.63	23.11

6.0% GUTTER LINE PROFILE										
H INCHES	W FEET	X1u FEET	X1L FEET	L1 FEET	Y INCHES	X2u FEET	X2L FEET	L2 FEET		
3	2.5	6.25	1.56	11.81	2.5	3.94	0.64	8.58		
4		8.33	2.08	14.42		7.51	1.22	12.74		
5		10.42	2.60	17.02		11.09	1.80	16.89		
6		12.50	3.13	19.63		14.67	2.38	21.05		
7		14.48	3.65	22.23		15.00	2.97	21.97		
8		15.00	4.17	23.71		15.00	3.81	22.81		
9		15.00	4.69	23.69		15.00	4.44	23.44		
3		3.0	6.25	1.56		11.81	3.0	2.58	0.42	7.00
4			8.33	2.08		14.42		6.16	1.00	11.16
5	10.42		2.60	17.02	9.73	1.58		15.31		
6	12.50		3.13	19.63	13.31	2.16		19.47		
7	14.48		3.65	22.23	15.00	2.75		21.75		
8	15.00		4.17	23.71	15.00	3.33		22.33		
9	15.00		4.69	23.69	15.00	3.91		22.91		
3	3.5		*	*	*	3.5		*	*	*
4			8.33	2.08	14.42			4.80	0.78	9.58
5		10.42	2.60	17.02	8.37		1.36	13.74		
6		12.50	3.13	19.63	11.95		1.94	17.89		
7		14.48	3.65	22.23	15.00		2.52	21.52		
8		15.00	4.17	23.71	15.00		3.11	22.11		
9		15.00	4.69	23.69	15.00		3.69	22.96		
3		4.0	*	*	*		4.0	*	*	*
4			8.33	2.08	14.42			3.44	0.56	8.00
5	10.42		2.60	17.02	7.02	1.14		12.16		
6	12.50		3.13	19.63	10.59	1.72		16.31		
7	14.48		3.65	22.23	14.17	2.30		20.47		
8	15.00		4.17	23.71	15.00	2.89		21.89		
9	15.00		4.69	23.69	15.00	3.47		22.47		



CURB RAMP TYPE 4

0.0% GUTTER LINE PROFILE					
H INCHES	W FEET	Y INCHES	X2u FEET	X2L FEET	Lz FEET
3	2.5	2.5	1.10	1.10	6.20
4			2.10	2.10	8.20
5			3.10	3.10	10.20
6			4.10	4.10	12.20
7			5.10	5.10	14.21
8			6.10	6.10	16.21
9			7.10	7.10	18.21
3	3.0	3.0	**	**	**
4			1.72	1.72	7.44
5			2.72	2.72	9.44
6			3.72	3.72	11.45
7			4.72	4.72	13.45
8			5.72	5.72	15.45
9			6.72	6.72	17.45
3	3.5	3.5	**	**	**
4			1.34	1.34	6.68
5			2.34	2.34	8.68
6			3.34	3.34	10.69
7			4.34	4.34	12.69
8			5.34	5.34	14.69
9			6.34	6.34	16.69
3	4.0	4.0	**	**	**
4			**	**	**
5			1.96	1.96	7.92
6			2.96	2.96	9.93
7			3.96	3.96	11.93
8			4.96	4.96	13.93
9			5.96	5.96	15.93

4.0% GUTTER LINE PROFILE					
H INCHES	W FEET	Y INCHES	X2u FEET	X2L FEET	Lz FEET
3	2.5	2.5	2.12	0.74	6.86
4			4.04	1.42	9.46
5			5.97	2.10	12.06
6			7.89	2.77	14.66
7			9.82	3.45	17.26
8			11.74	4.12	19.87
9			13.67	4.80	22.47
3	3.0	3.0	1.39	0.49	5.88
4			3.31	1.16	8.48
5			5.24	1.84	11.08
6			7.16	2.52	13.68
7			9.09	3.19	16.28
8			11.01	3.87	18.88
9			12.94	4.54	21.48
3	3.5	3.5	0.66	0.23	4.89
4			2.58	0.91	7.49
5			4.51	1.58	10.09
6			6.43	2.26	12.69
7			8.36	2.93	15.29
8			10.28	3.61	17.89
9			12.20	4.29	20.49
3	4.0	4.0	**	**	**
4			1.85	0.65	6.50
5			3.78	1.33	9.10
6			5.70	2.00	11.70
7			7.62	2.68	14.30
8			9.55	3.35	16.90
9			11.47	4.03	19.50

1.0% GUTTER LINE PROFILE					
H INCHES	W FEET	Y INCHES	X2u FEET	X2L FEET	Lz FEET
3	2.5	2.5	1.25	0.98	6.24
4			2.39	1.88	8.27
5			3.53	2.77	10.30
6			4.66	3.66	12.33
7			5.80	4.56	14.36
8			6.94	5.45	16.39
9			8.07	6.34	18.42
3	3.0	3.0	0.82	0.64	5.46
4			1.96	1.54	7.49
5			3.09	2.43	9.52
6			4.23	3.32	11.55
7			5.37	4.22	13.58
8			6.50	5.11	15.61
9			7.64	6.00	17.64
3	3.5	3.5	0.39	0.30	4.69
4			1.53	1.20	6.72
5			2.66	2.09	8.75
6			3.80	2.98	10.78
7			4.94	3.88	12.81
8			6.07	4.77	14.84
9			7.21	5.66	16.87
3	4.0	4.0	**	**	**
4			1.09	0.86	5.95
5			2.23	1.75	7.98
6			3.37	2.65	10.01
7			4.50	3.54	12.04
8			5.64	4.43	14.07
9			6.78	5.32	16.10

5.0% GUTTER LINE PROFILE					
H INCHES	W FEET	Y INCHES	X2u FEET	X2L FEET	Lz FEET
3	2.5	2.5	2.76	0.69	7.44
4			5.26	1.31	10.57
5			7.76	1.94	13.70
6			10.26	2.56	16.83
7			12.77	3.19	19.95
8			15.00	3.81	22.81
9			15.00	4.44	23.44
3	3.0	3.0	1.80	0.45	6.26
4			4.31	1.08	9.38
5			6.81	1.70	12.51
6			9.31	2.33	15.64
7			11.81	2.95	18.77
8			14.32	3.58	21.89
9			15.00	3.87	23.20
3	3.5	3.5	0.85	0.21	5.07
4			3.36	0.84	8.20
5			5.86	1.46	11.32
6			8.36	2.09	14.45
7			10.86	2.71	17.58
8			13.37	3.34	20.71
9			15.00	3.96	22.96
3	4.0	4.0	**	**	**
4			2.41	0.60	7.01
5			4.91	1.23	10.14
6			7.41	1.85	13.26
7			9.91	2.48	16.39
8			12.42	3.10	19.52
9			14.92	3.73	22.65

2.0% GUTTER LINE PROFILE					
H INCHES	W FEET	Y INCHES	X2u FEET	X2L FEET	Lz FEET
3	2.5	2.5	1.45	0.89	6.34
4			2.77	1.69	8.46
5			4.08	2.50	10.58
6			5.40	3.31	12.71
7			6.72	4.12	14.83
8			8.03	4.92	16.95
9			9.35	5.73	19.08
3	3.0	3.0	0.95	0.58	5.53
4			2.27	1.39	7.65
5			3.58	2.20	9.78
6			4.90	3.00	11.90
7			6.22	3.81	14.02
8			7.53	4.62	16.15
9			8.85	5.42	18.27
3	3.5	3.5	0.45	0.28	4.72
4			1.77	1.08	6.85
5			3.08	1.89	8.97
6			4.40	2.70	11.09
7			5.72	3.50	13.22
8			7.03	4.31	15.34
9			8.35	5.12	17.46
3	4.0	4.0	**	**	**
4			1.27	0.78	6.04
5			2.58	1.58	8.16
6			3.90	2.39	10.29
7			5.22	3.20	12.41
8			6.53	4.00	14.53
9			7.85	4.81	16.66


6.0% GUTTER LINE PROFILE					
H INCHES	W FEET	Y INCHES	X2u FEET	X2L FEET	Lz FEET
3	2.5	2.5	3.94	0.64	8.58
4			7.51	1.22	12.74
5			11.09	1.80	16.89
6			14.67	2.38	21.05
7			15.00	2.97	21.97
8			15.00	3.55	22.55
9			15.00	4.13	23.13
3	3.0	3.0	2.58	0.42	7.0
4			6.16	1.00	11.16
5			9.73	1.58	15.31
6			13.31	2.16	19.47
7			15.00	2.75	21.75
8			15.00	3.33	22.33
9			15.00	3.91	22.91
3	3.5	3.5	1.22	0.20	5.42
4			4.80	0.78	9.58
5			8.37	1.36	13.74
6			11.95	1.94	17.89
7			15.00	2.52	21.52
8			15.00	3.11	22.11
9			15.00	3.69	22.69
3	4.0	4.0	**	**	**
4			3.44	0.56	8.00
5			7.02	1.14	12.16
6			10.59	1.72	16.31
7			14.17	2.30	20.47
8			15.00	2.89	21.89
9			15.00	3.47	22.47

3.0% GUTTER LINE PROFILE					
H INCHES	W FEET	Y INCHES	X2u FEET	X2L FEET	Lz FEET
3	2.5	2.5	1.72	0.81	6.53
4			3.28	1.55	8.83
5			4.85	2.28	11.13
6			6.41	3.02	13.43
7			7.98	3.75	15.73
8			9.54	4.49	18.03
9			11.10	5.22	20.33
3	3.0	3.0	1.13	0.53	5.66
4			2.69	1.27	7.96
5			4.25	2.00	10.26
6			5.82	2.74	12.55
7			7.38	3.47	14.85
8			8.94	4.21	17.15
9			10.51	4.94	19.45
3	3.5	3.5	0.53	0.25	4.78
4			2.10	0.99	7.08
5			3.66	1.72	9.38
6			5.22	2.46	11.68
7			6.79	3.19	13.98
8			8.35	3.93	16.28
9			9.91	4.66	18.58
3	4.0	4.0	**	**	**
4			1.50	0.71	6.21
5			3.07	1.44	8.51
6			4.63	2.18	10.81
7			6.19	2.91	13.11
8			7.76	3.65	15.41
9			9.32	4.38	17.71


7.0% GUTTER LINE PROFILE						
H INCHES	W FEET	Y INCHES	X2u FEET	X2L FEET	Lz FEET	
3	2.5	2.5	6.90	0.60	11.50	
4			13.16	1.14	18.31	
5			15.00	1.69	20.69	
6			15.00	2.23	21.23	
7			15.00	2.77	21.77	
8			15.00	3.32	22.32	
9			15.00	3.86	22.86	
3	3.0	3.0	4.52	0.39	8.91	
4			10.78	0.94	15.72	
5			15.00	1.48	20.48	
6			15.00	2.02	21.02	
7			15.00	2.57	21.57	
8			15.00	3.11	22.11	
9			15.00	3.65	22.65	
3	3.5	3.5	2.14	0.19	6.32	
4			8.40	0.73	13.13	
5			14.67	1.27	19.94	
6			15.00	1.82	20.82	
7			15.00	2.36	21.36	
8			15.00	2.90	21.90	
9			15.00	3.45	22.45	
3	4.0	4.0	**	**	**	
4			6.03	0.52	10.55	
5			12.29	1.07	17.36	
6			15.00	1.61	20.61	
7			15.00	2.15	21.15	
8			15.00	2.70	21.70	
9			15.00	3.24	22.24	



BDC7D-02-REVISIONS TO CD-608-1  
BDC7D-01- ORIGINAL SHEET

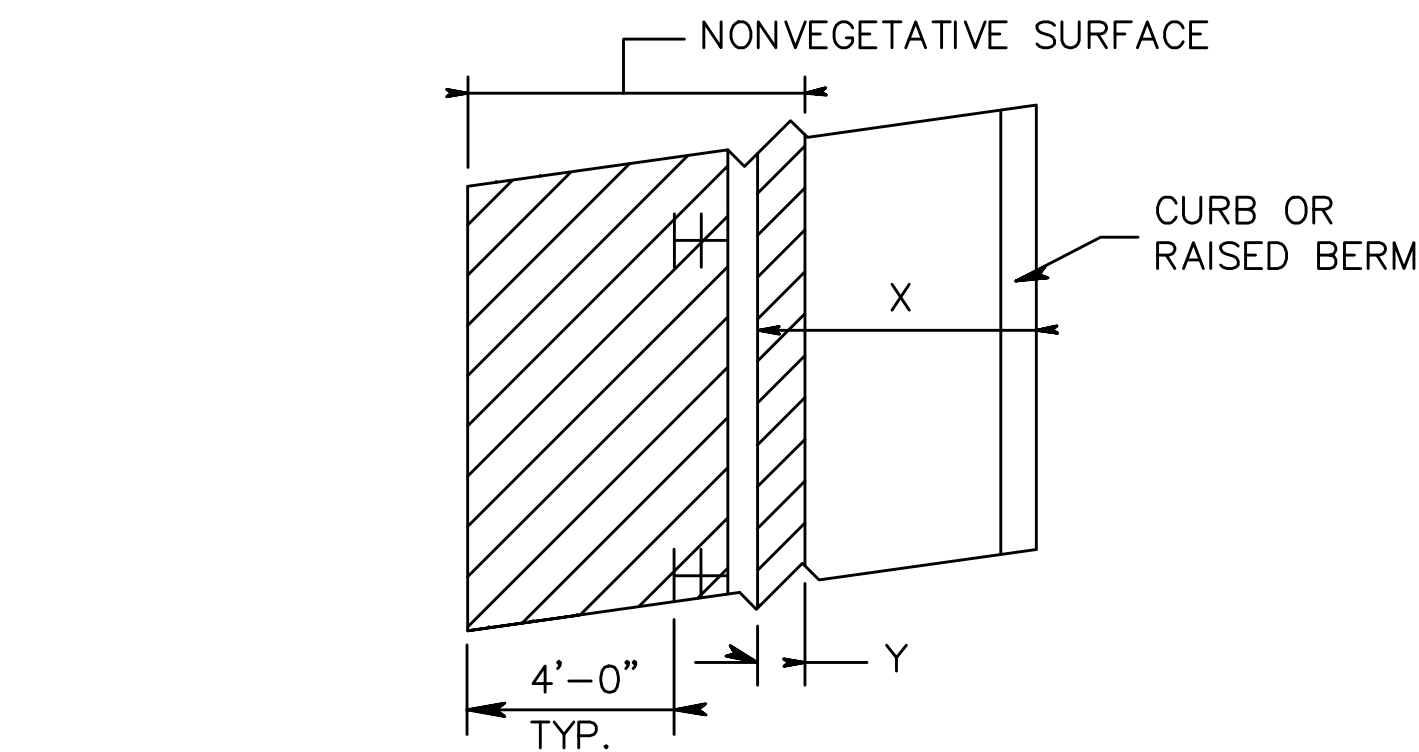


PLAN VIEW

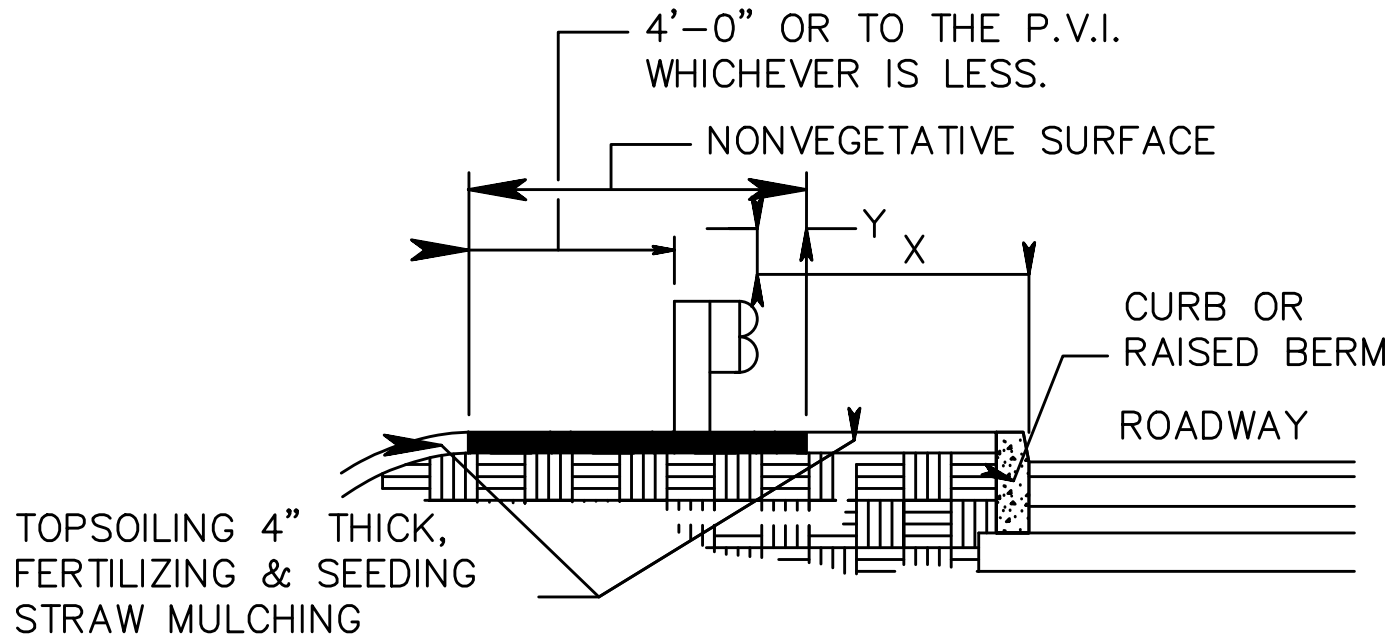


SECTION VIEW

NONVEGETATIVE SURFACES AROUND GUIDE RAIL BEHIND CURB OR RAISED BERM

CD-608-1.1

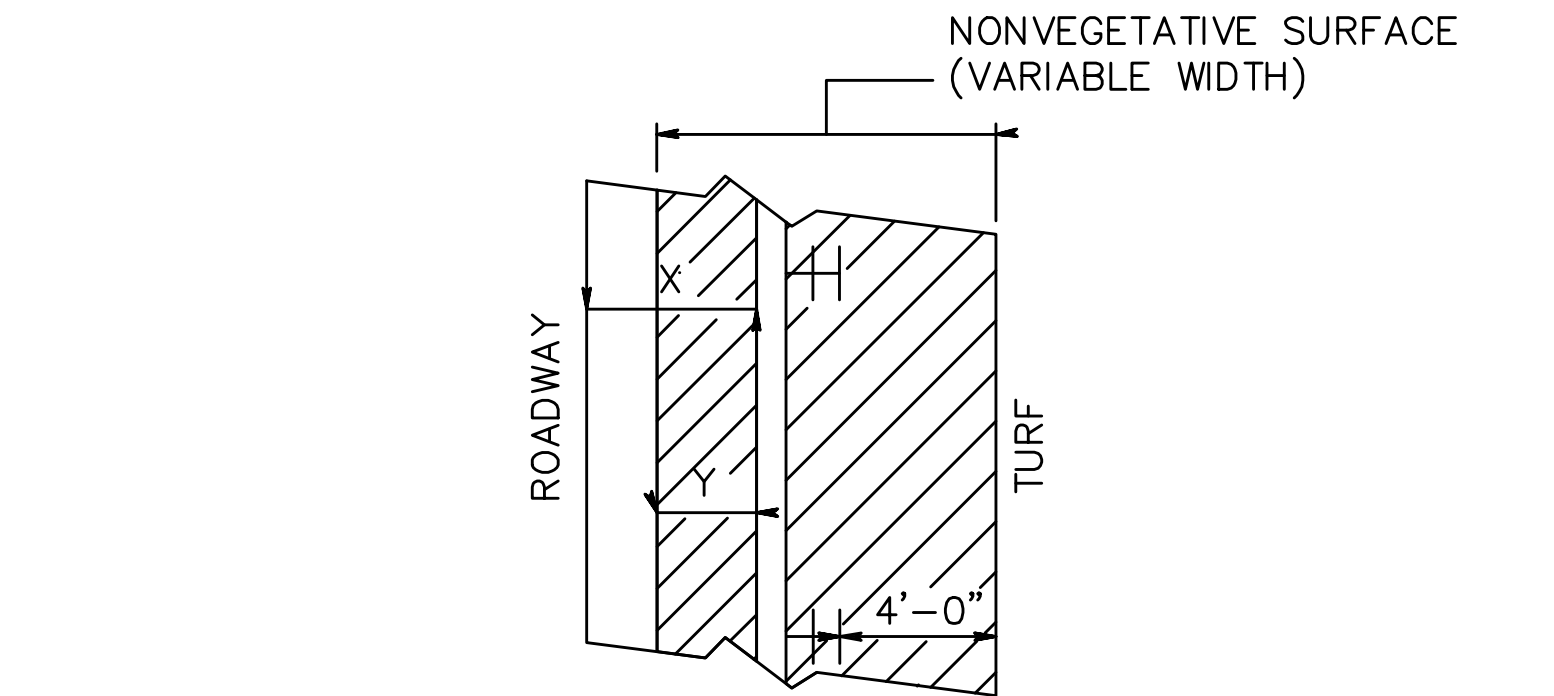


PLAN VIEW

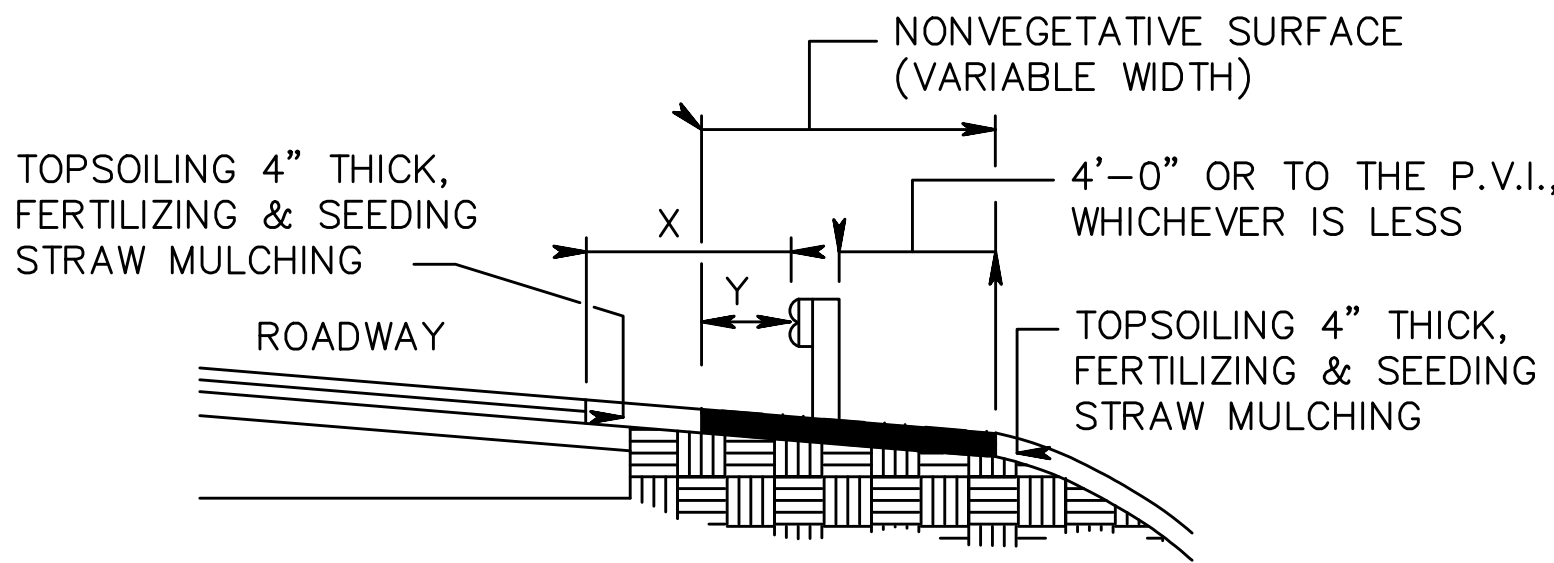


SECTION VIEW

NONVEGETATIVE SURFACE AT EDGE OF PAVEMENT ON UMBRELLA SECTION WHERE GUIDE RAIL IS USED

CD-608-1.2

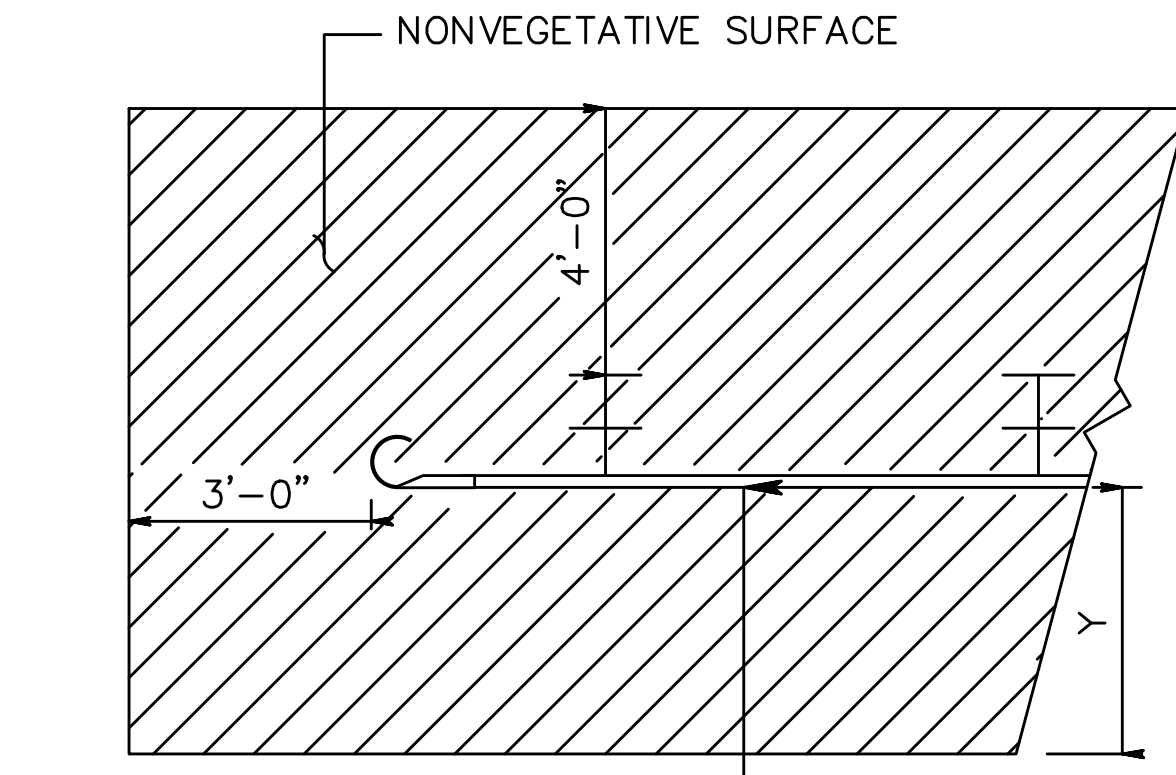


PLAN VIEW

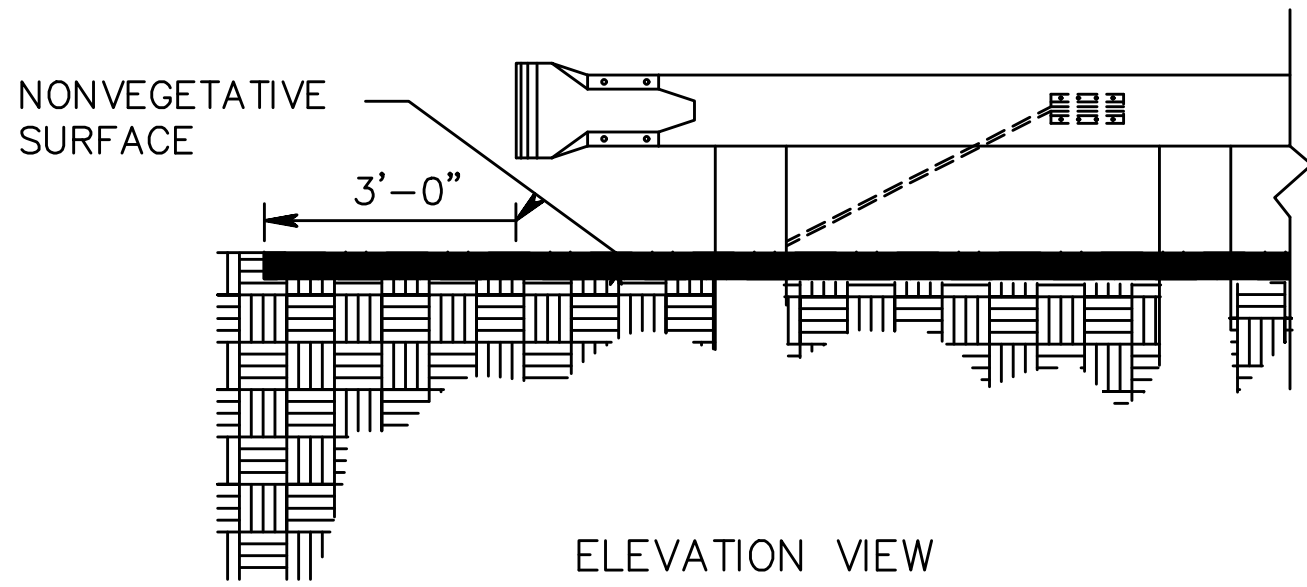


ELEVATION VIEW

NONVEGETATIVE SURFACES AROUND BEAM GUIDE RAIL ANCHORAGE

CD-608-1.3

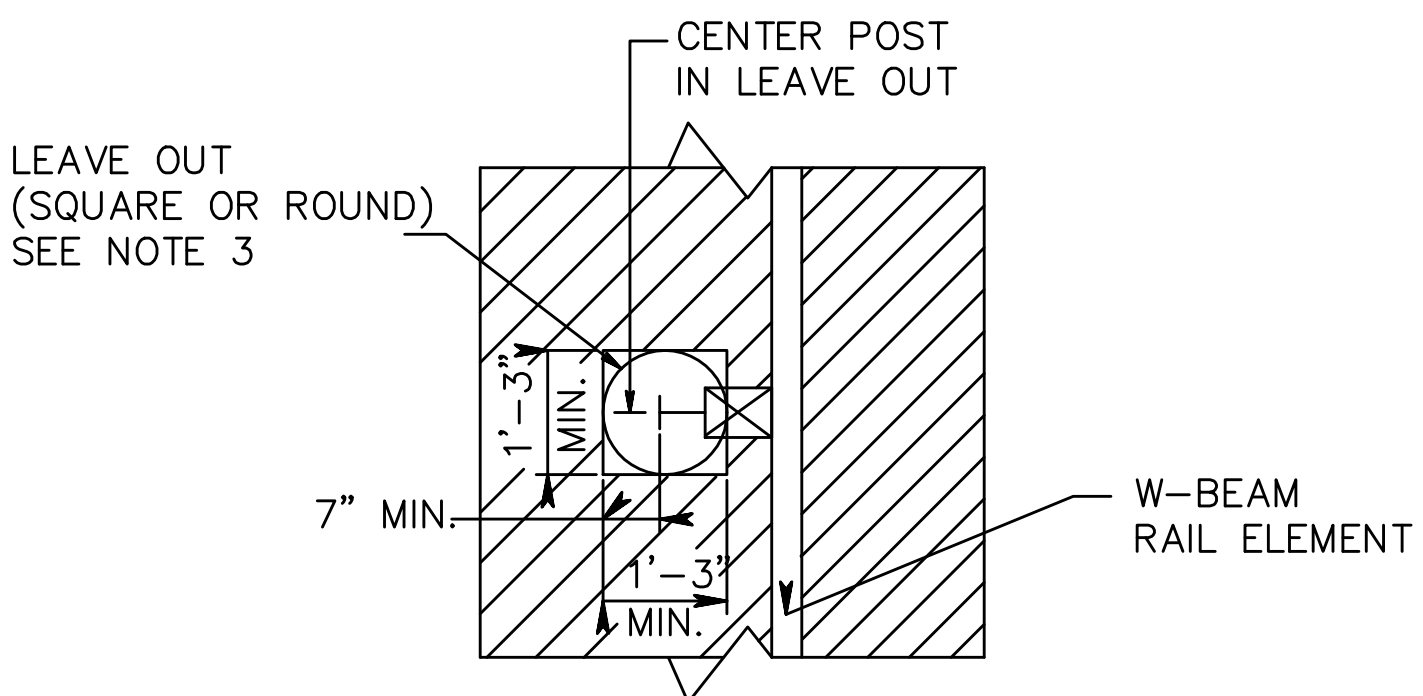


PLAN VIEW

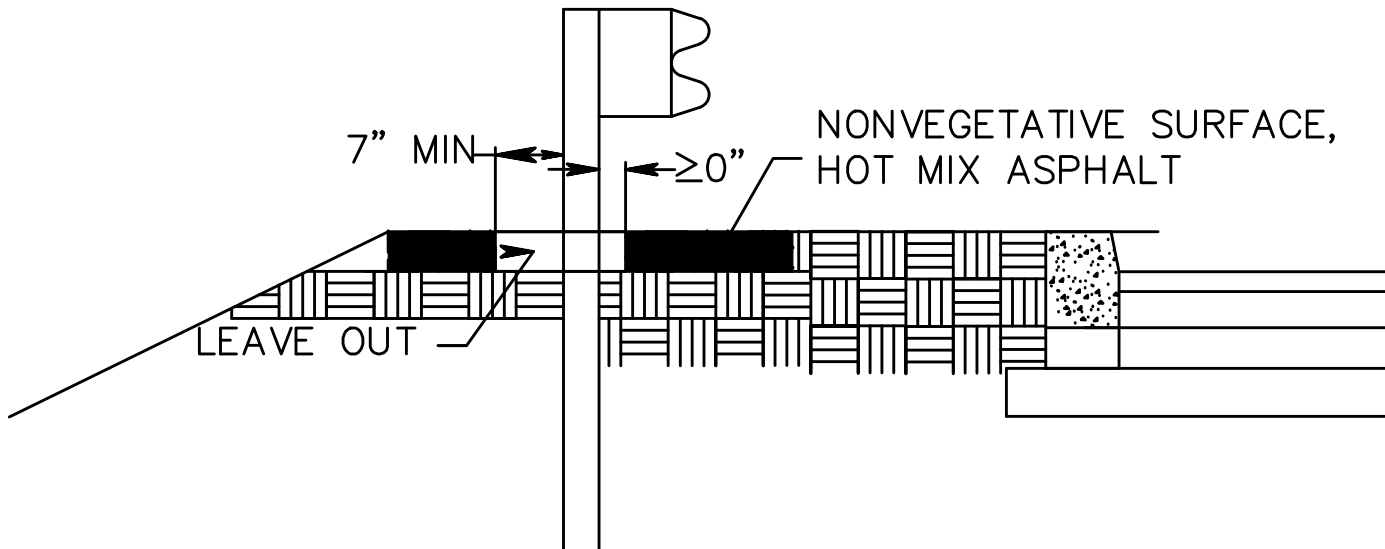

SECTION VIEW

LEAVE OUT FOR STANDARD ITEM "NONVEGETATIVE SURFACE, HOT MIX ASPHALT" ONLY


CD-608-1.4

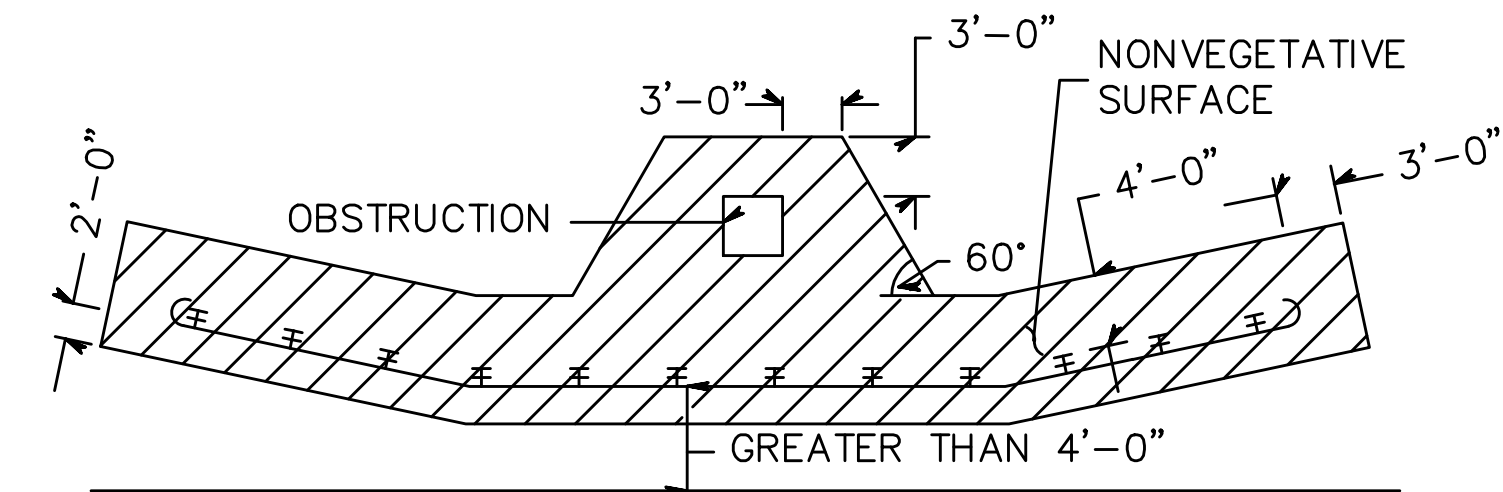

PLAN VIEW

NONVEGETATIVE SURFACE AROUND FLARED GUIDE RAIL WHERE GUIDE RAIL OFFSET FROM EDGE OF PAVEMENT IS GREATER THAN 4'-0"


CD-608-1.5

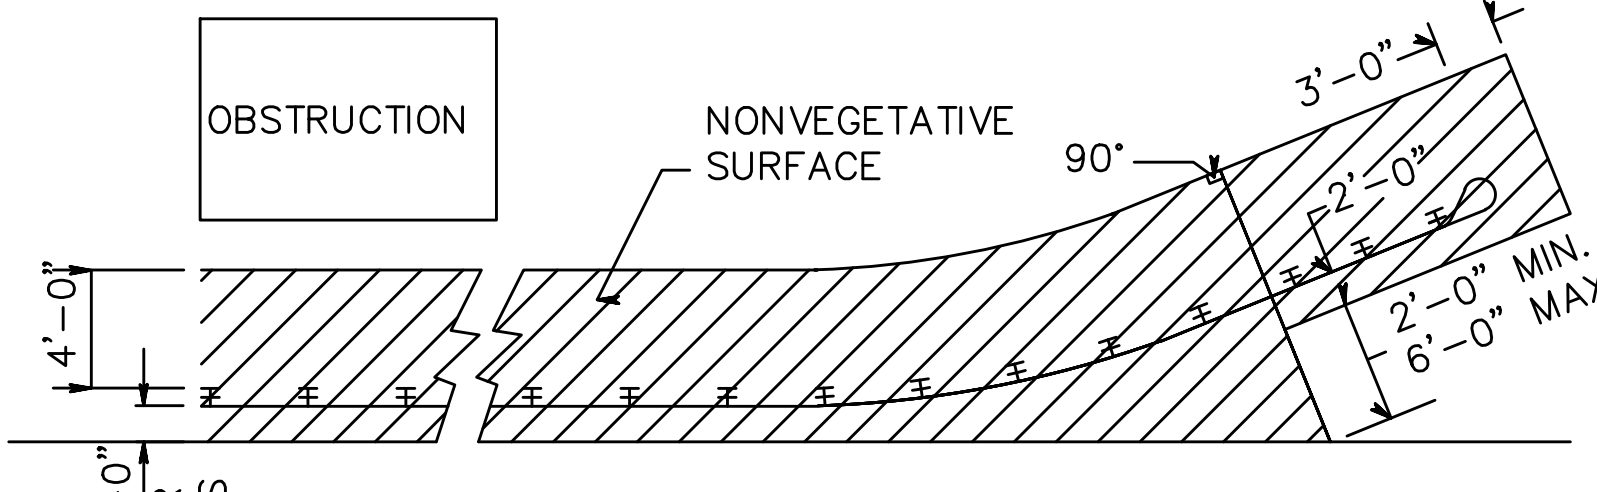

PLAN VIEW

NONVEGETATIVE SURFACE AROUND FLARED GUIDE RAIL WHERE GUIDE RAIL OFFSET FROM EDGE OF PAVEMENT IS 4'-0" OR LESS

CD-608-1.6

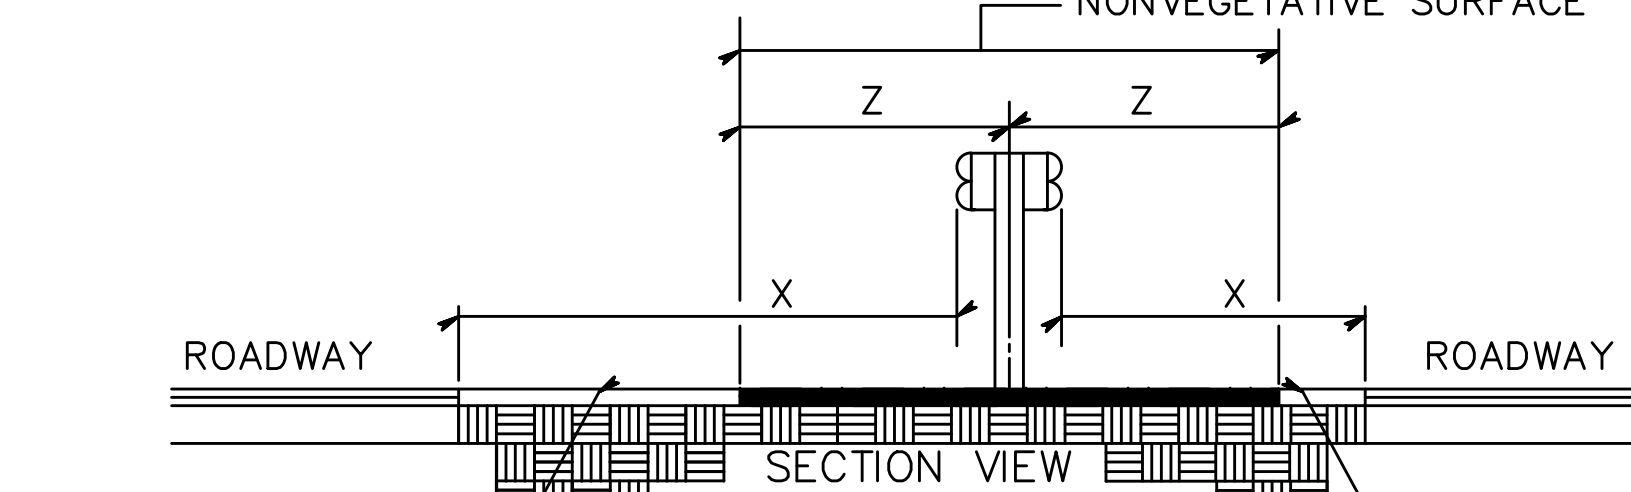

TOPSOILING 4" THICK, FERTILIZING & SEEDING STRAW MULCHING


NOTE:  
WHERE X IS LESS THAN OR EQUAL TO 4', USE Y TO DETERMINE  
NONVEGETATIVE SURFACE TREATMENT FOR THAT SIDE OF GUIDE RAIL.

NONVEGETATIVE SURFACE UNDER MEDIAN GUIDE RAIL

CD-608-1.7

X	Y
GUIDE RAIL OFFSET FROM EDGE OF PAVEMENT	WIDTH OF NONVEGETATIVE SURFACE IN FRONT OF GUIDE RAIL
GREATER THAN 4'-0" LESS THAN OR EQUAL TO 4'-0"	2'-0" Y=X

CD-608-1.8

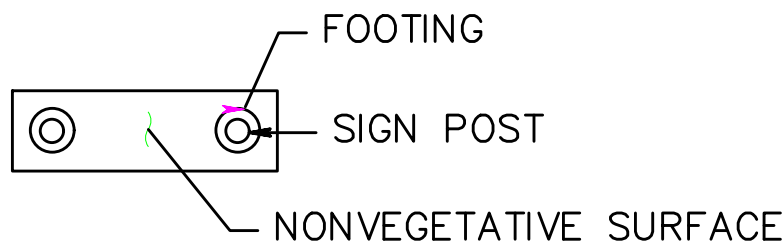

PLAN VIEW

THE NONVEGETATIVE SURFACE IS TO FORM A RECTANGULAR PAD WHOSE OUTSIDE LIMITS EXTEND A MINIMUM OF 3' -0" BEYOND THE POST FOOTING.


NONVEGETATIVE SURFACE AROUND OVERHEAD SIGN FOUNDATIONS AND UNDER LARGE GROUND MOUNTED SIGNS

CD-608-1.9

GENERAL NOTES:

- IF THE END OF THE GUIDE RAIL IS BURIED IN THE SLOPE, THE LIMIT OF NONVEGETATIVE SURFACE RELATIVE TO THE BURIED GUIDE RAIL WILL BE DETERMINED BY THE RE.
- SEE TYPICAL SECTIONS FOR CROSS SLOPES IN ROADSIDE (BORDER OR SIDEWALK AREA).
- LEAVE OUTS CAN BE FILLED WITH:  
(a) COARSE AGGREGATE, SIZE NO. 57 TO BE HAND TAMPED, THEN SEAL SURFACE WITH EMULSIFIED ASPHALT AT 0.35 GAL/SY 0.05 AS PER STANDARD SPECIFICATIONS SECTION 902; OR  
(b) COARSE AGGREGATE, SIZE NO. 57 IN BASE OF LEAVE OUT AND TOP WITH NONVEGETATIVE SURFACE, HMA, 2" THICK. GRADE TO DRAIN AND HAND TAMP LEAVE OUT SURFACE.

CD-608-1.10

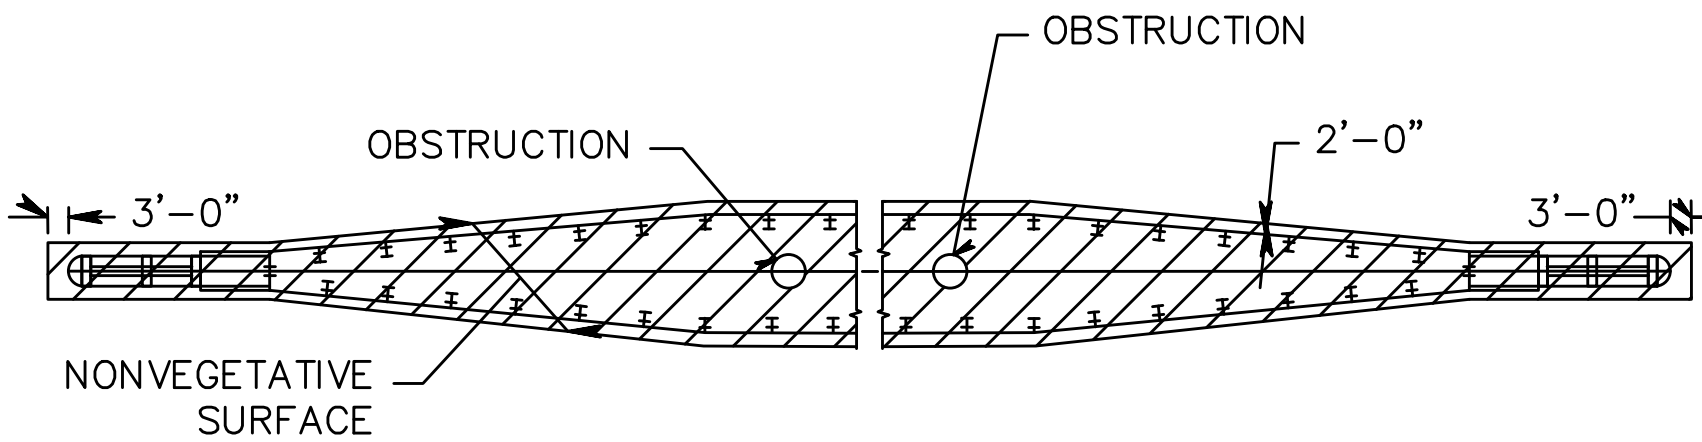

PLAN VIEW

NONVEGETATIVE SURFACE AT MEDIAN GUIDE RAIL

CD-608-1.11


NONVEGETATIVE SURFACE  
N.T.S.

CD-608-1

NEW JERSEY DEPARTMENT OF TRANSPORTATION


CONSTRUCTION DETAILS



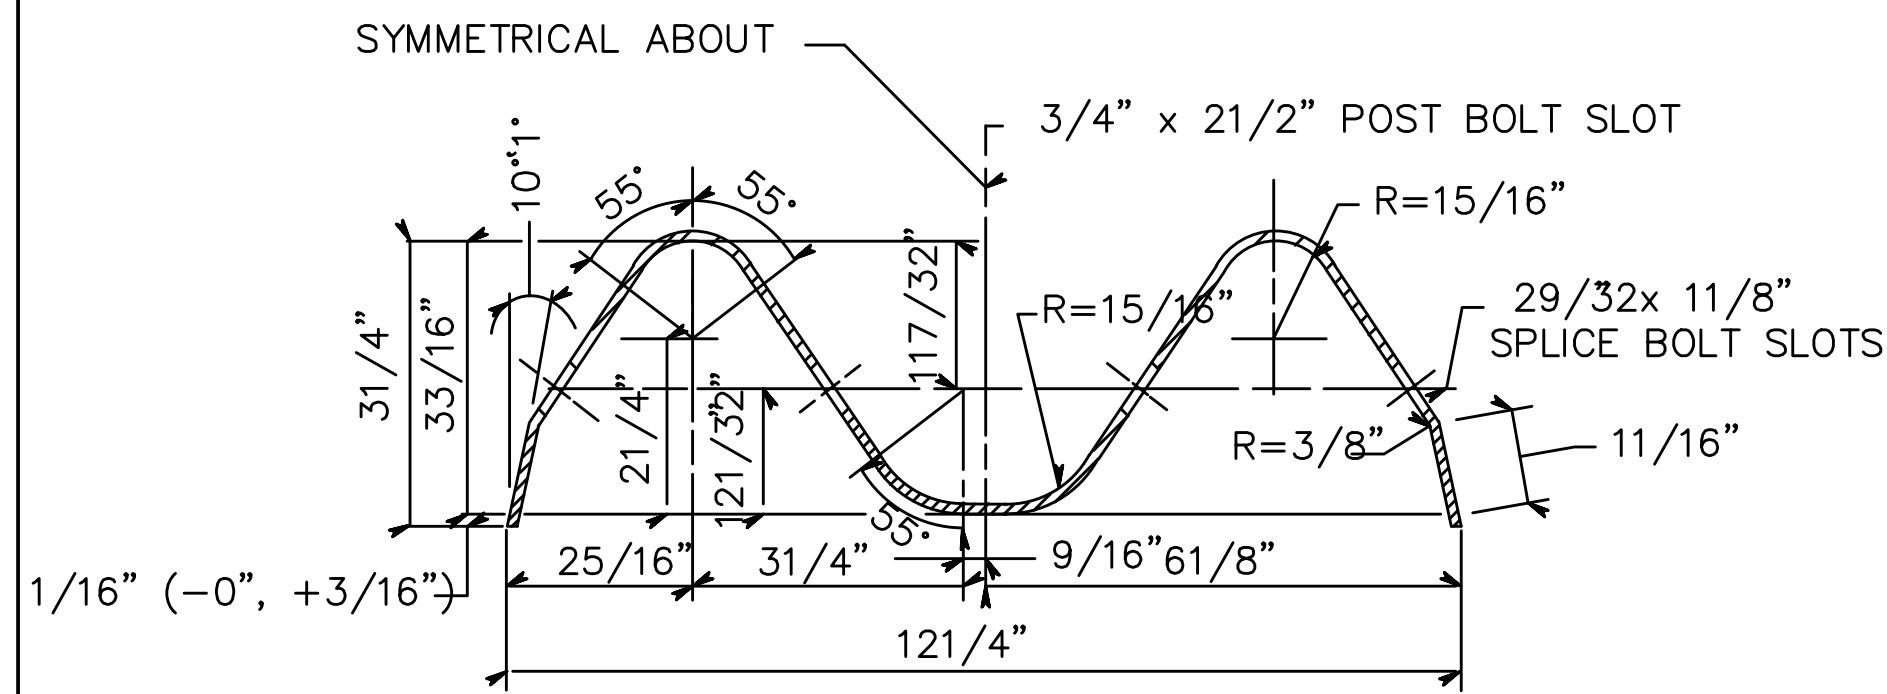


RAIL ELEMENT TO BE SUPPLIED IN LENGTHS OF 13'- 61/2" OR 26'-01/2"


W-BEAM RAIL ELEMENT

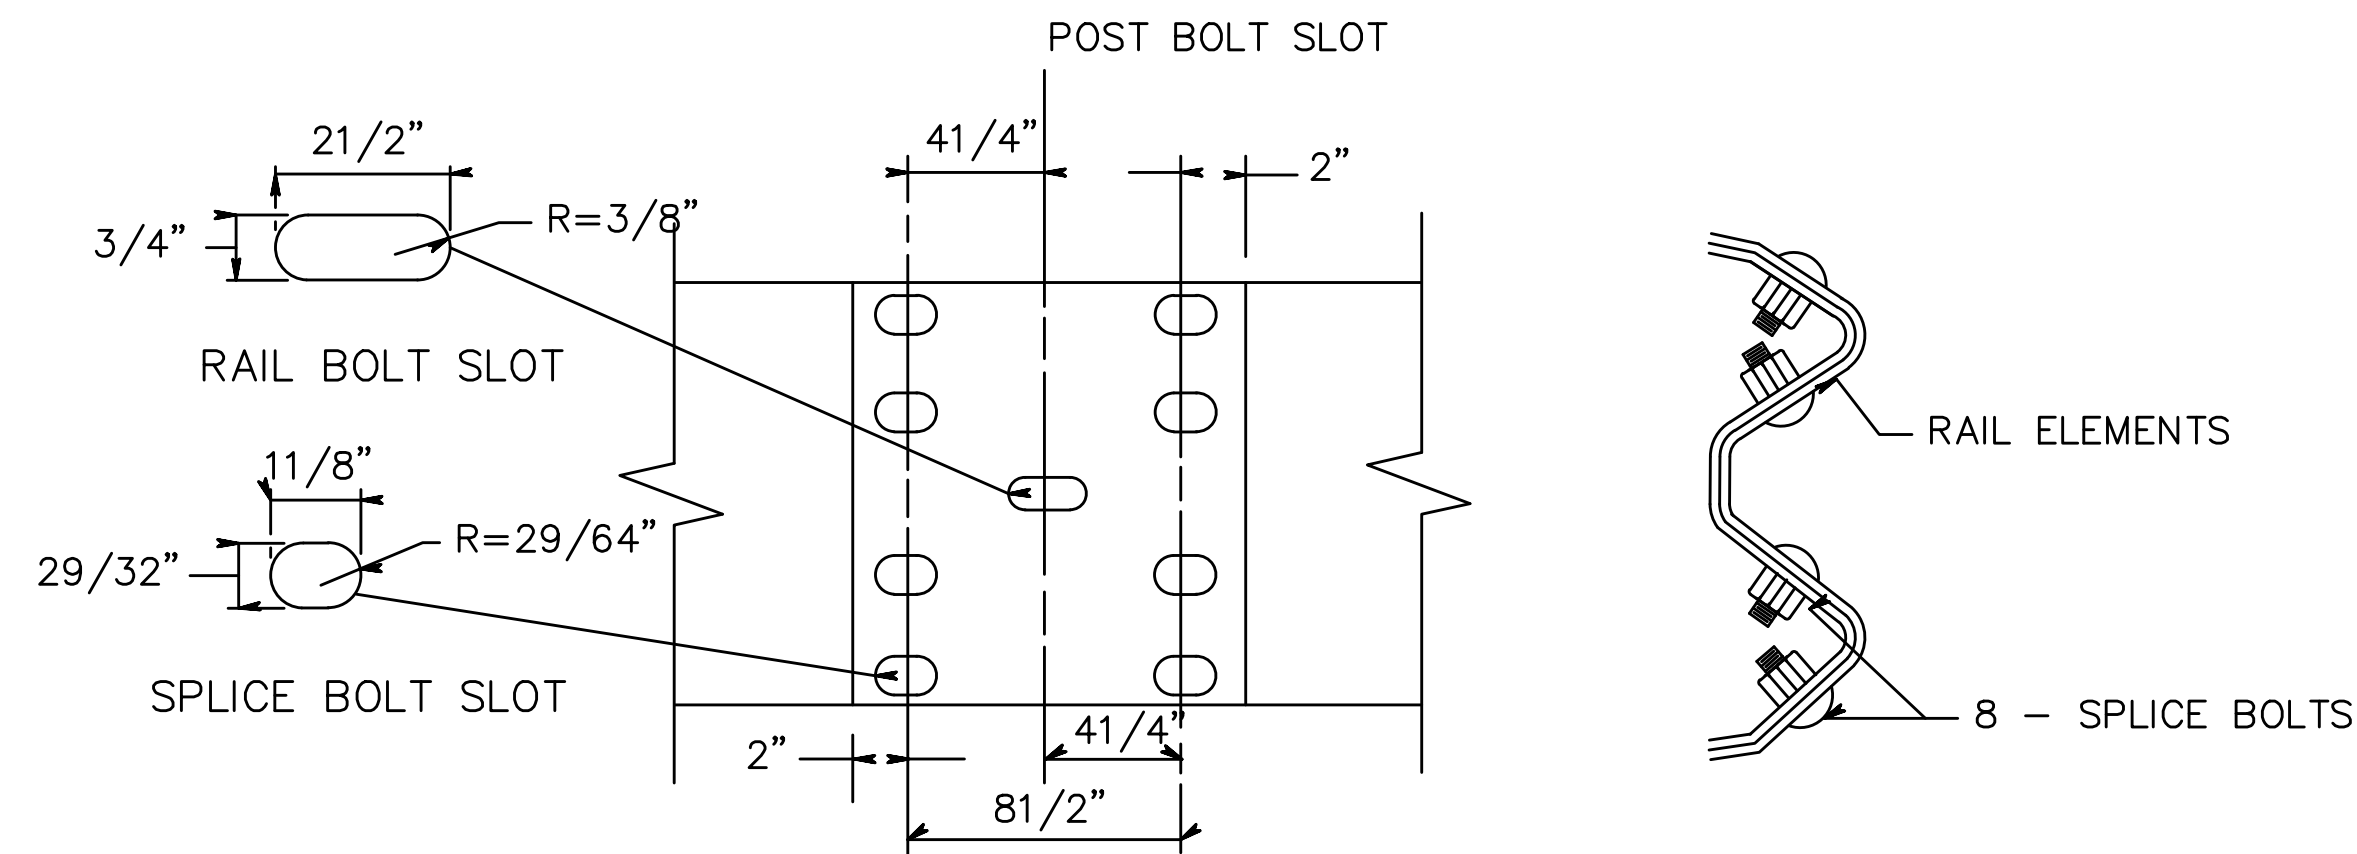


RAIL SPLICE

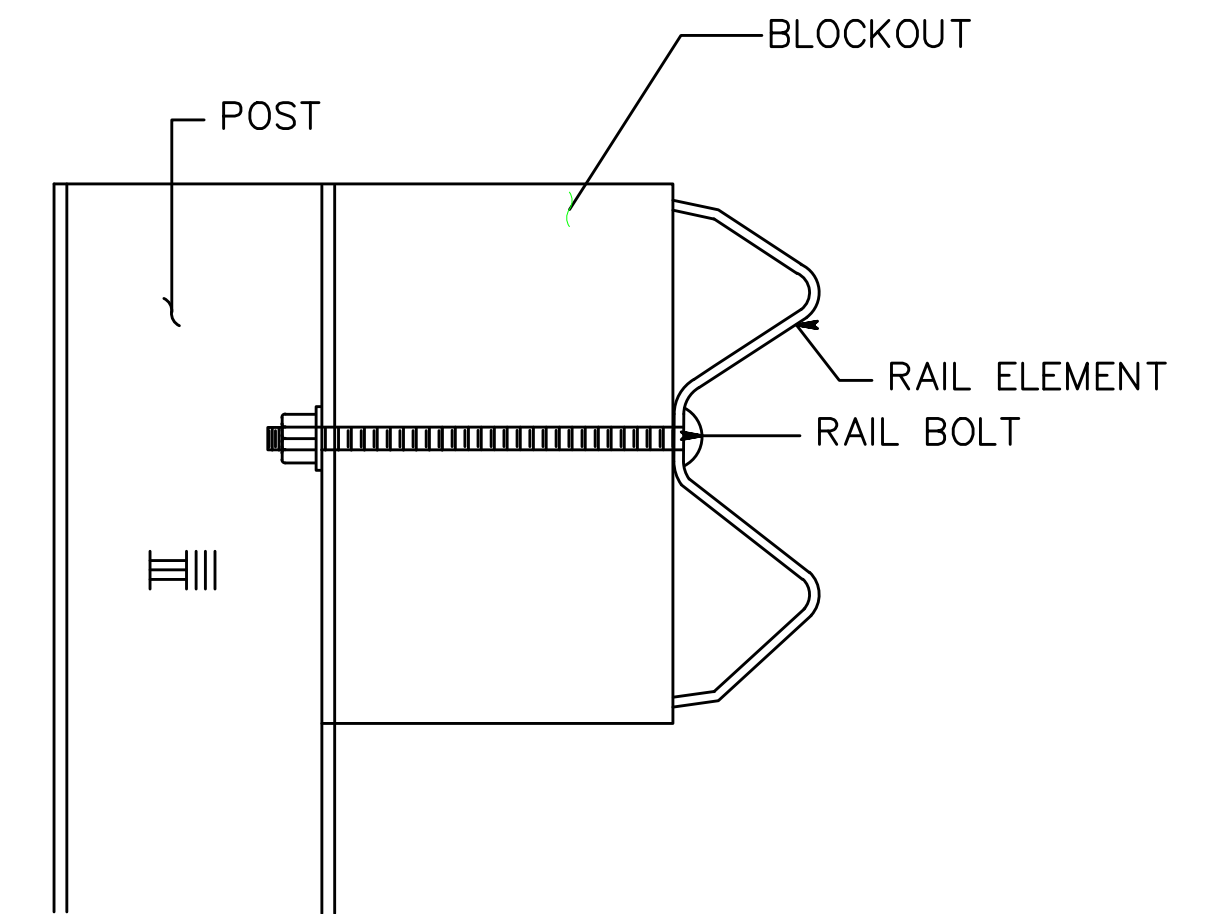


BEAM GUIDE RAIL POST ASSEMBLY

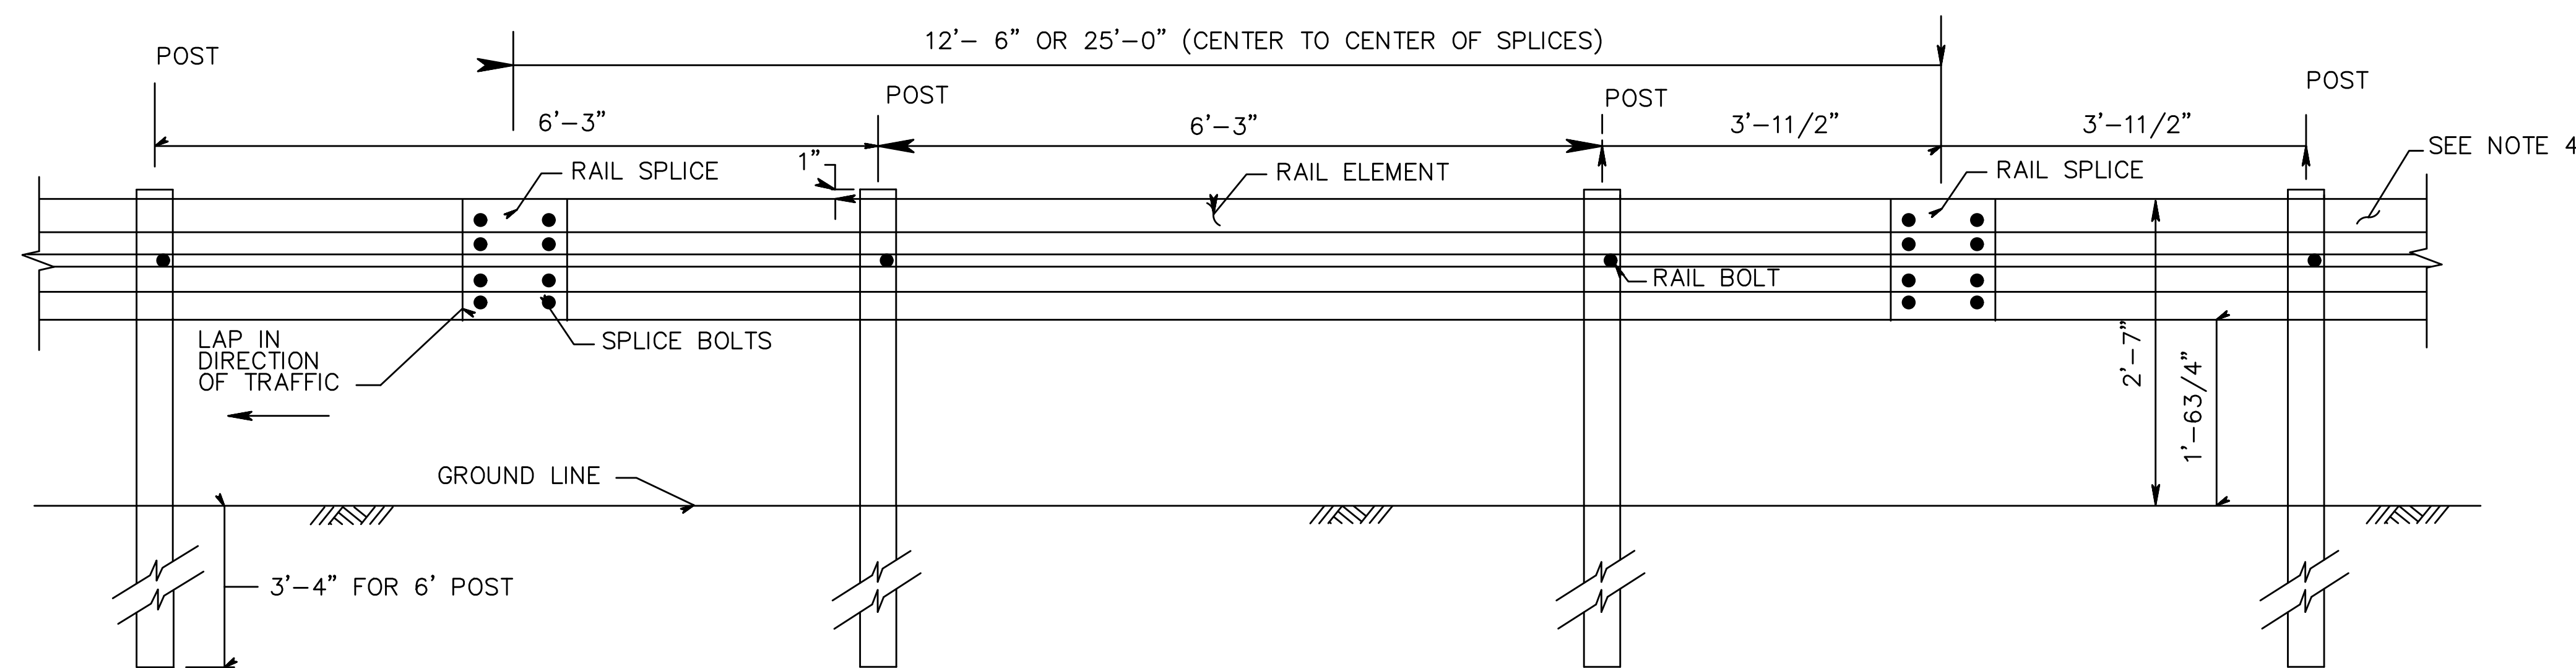

BEAM GUIDE RAIL

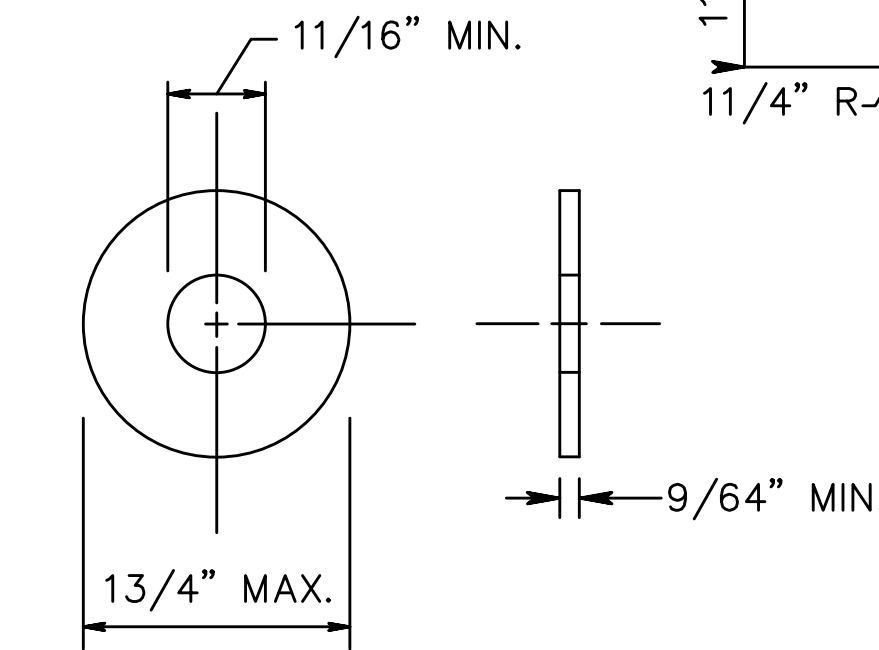


STEEL WASHER

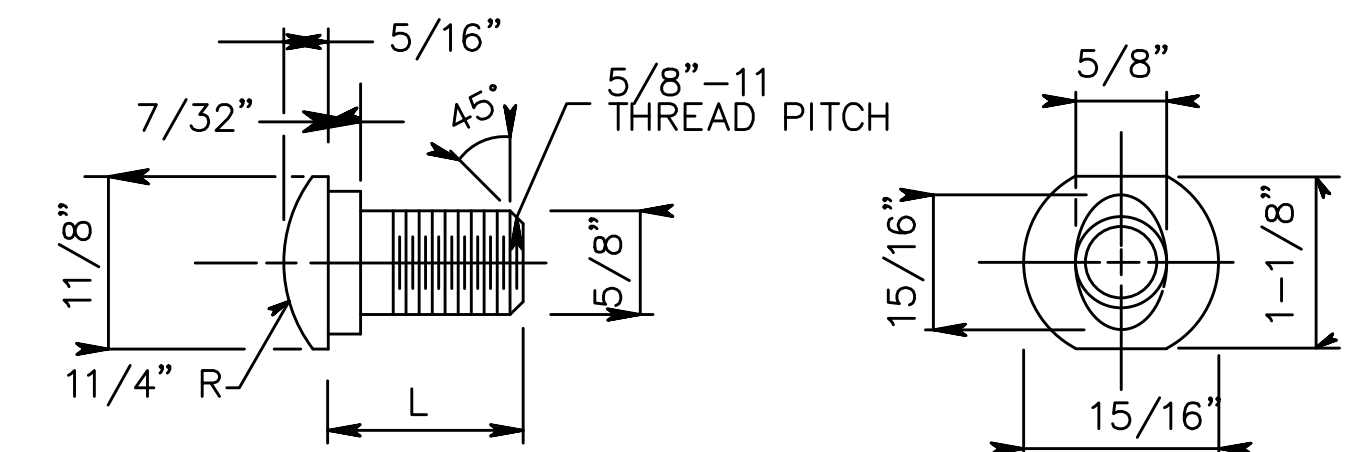

TYPE	L	MIN. THREAD LENGTH
SPLICE	11/4"	FULL LENGTH THREAD
RAIL	91/2"	13/4"


5/8" DIA. BUTTON HEAD BOLT

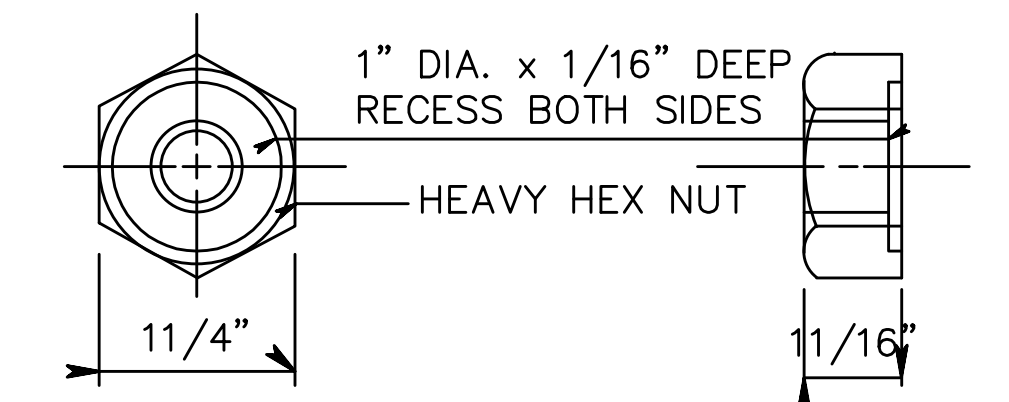

5/8" DIA. RECESS NUT  
SPLICE & RAIL NUT & BOLT

BEAM GUIDE RAIL  
(MASH TL-3)


N.T.S.

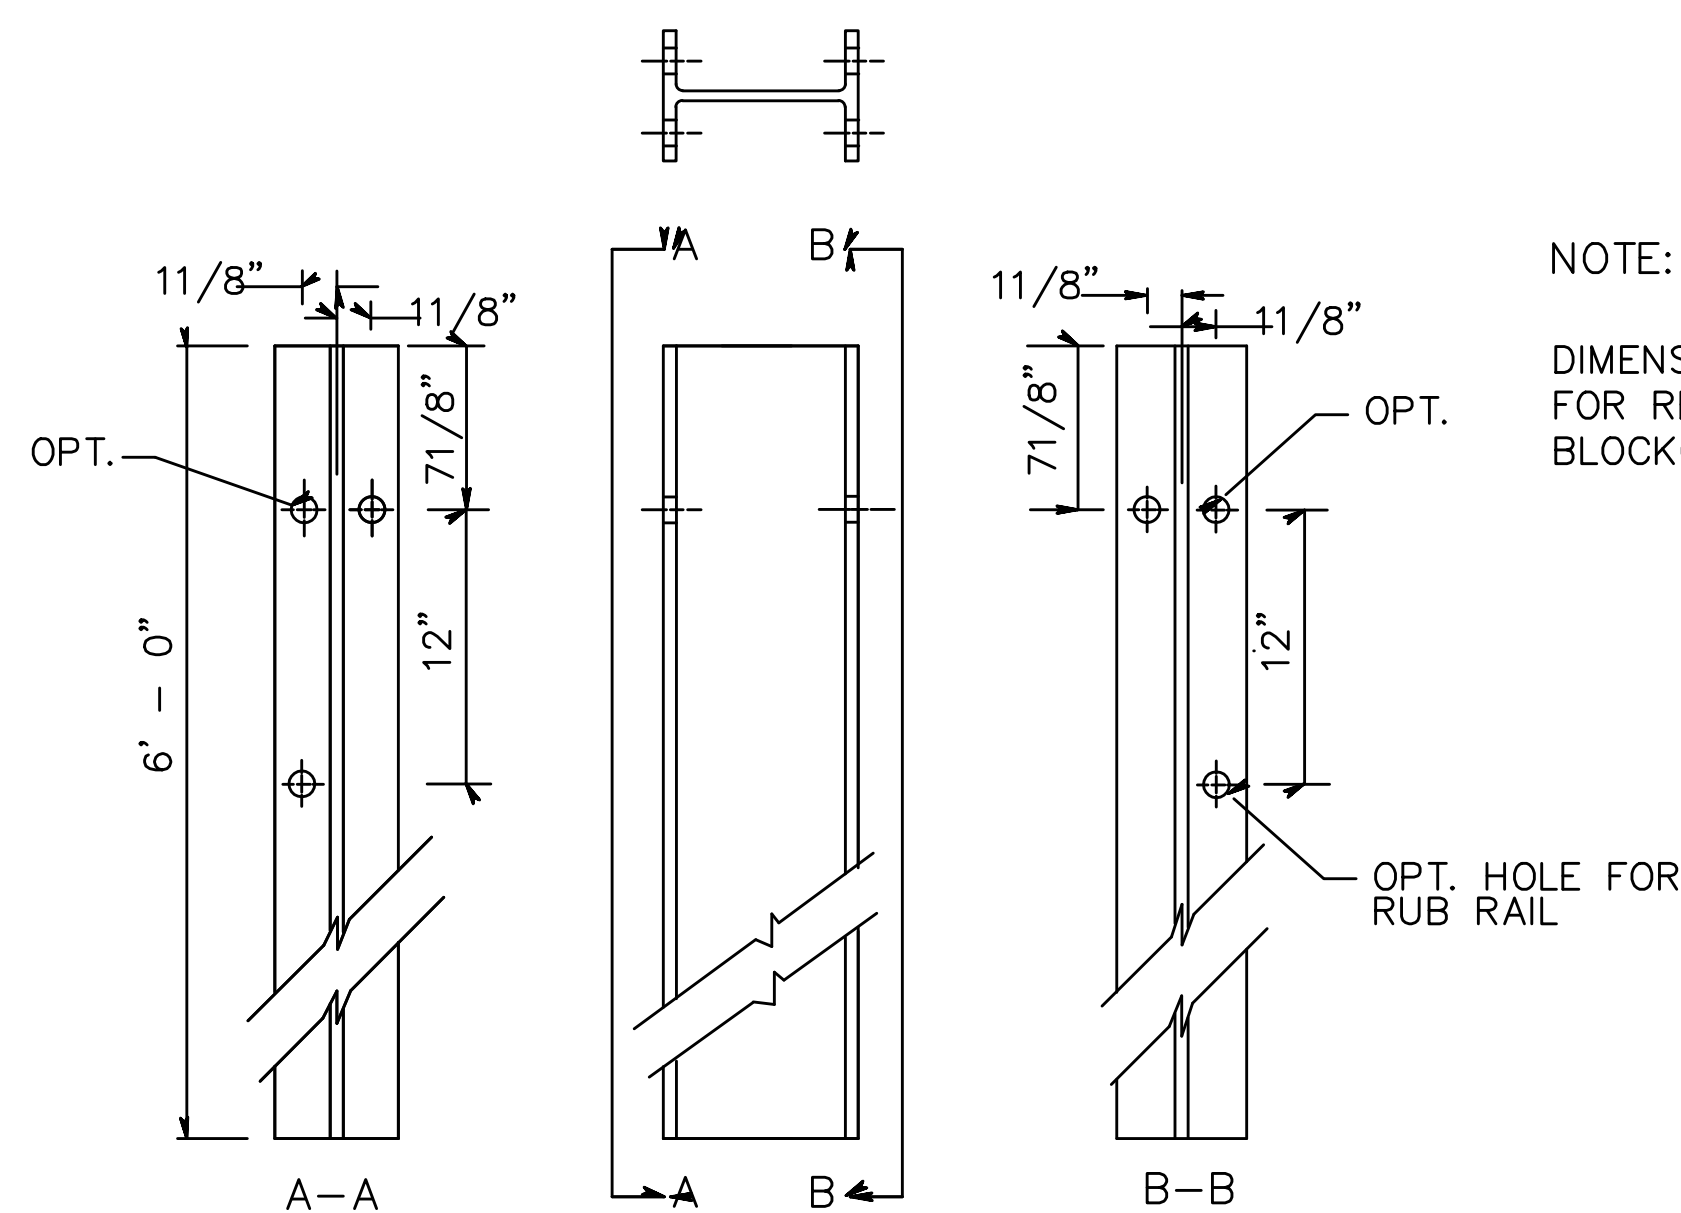


W6x8.5 OR W6x9 STEEL POST

6' POST

NOTE:  
DIMENSIONS SHOWN MAY VARY  
FOR RECYCLED/SYNTHETIC  
BLOCKOUTS.

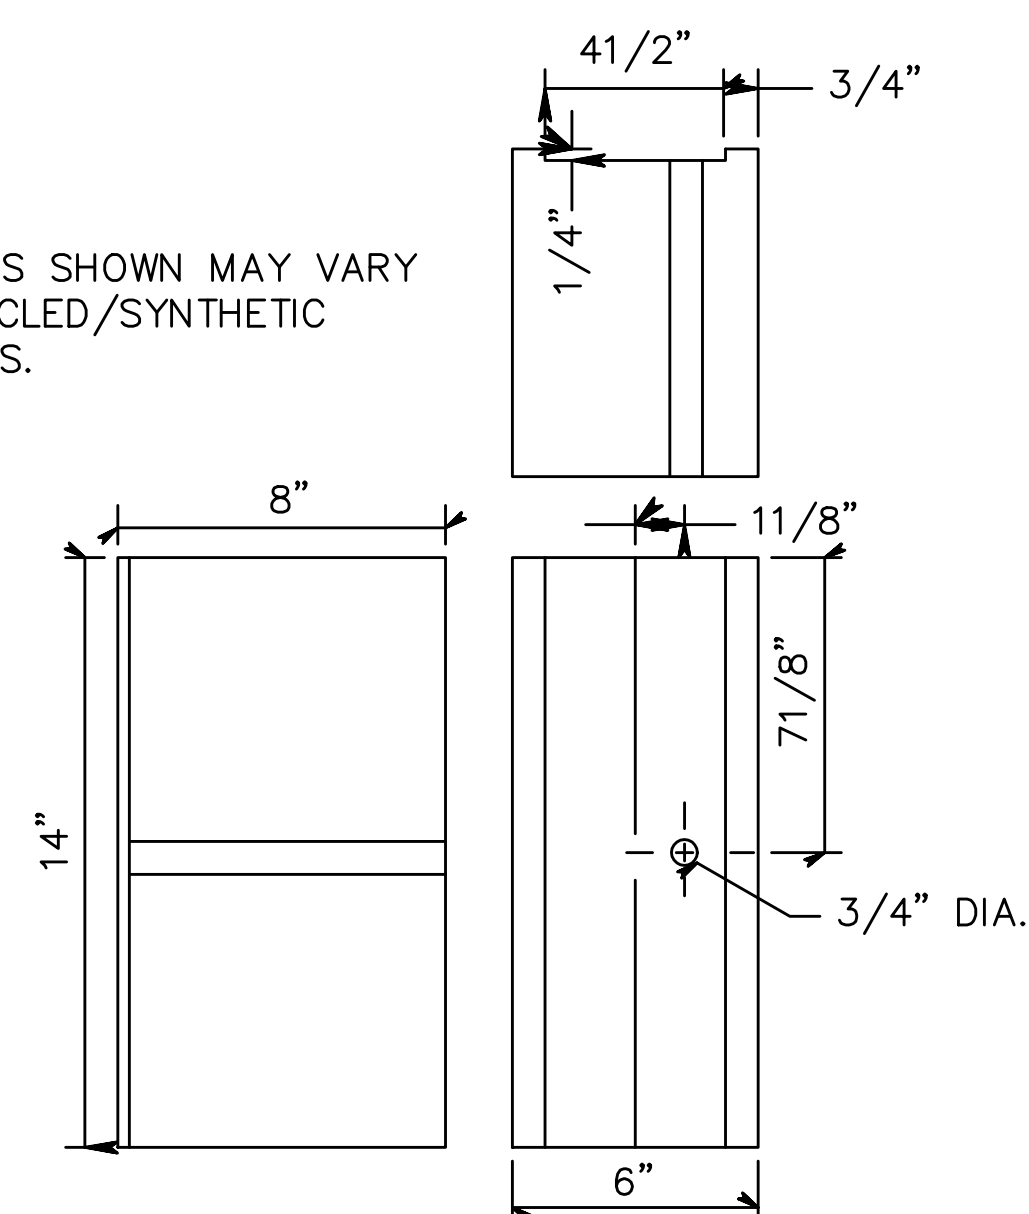

APPROVED RECYCLED/  
SYNTHETIC MATERIALS  
6"x8"x14" BLOCKOUT

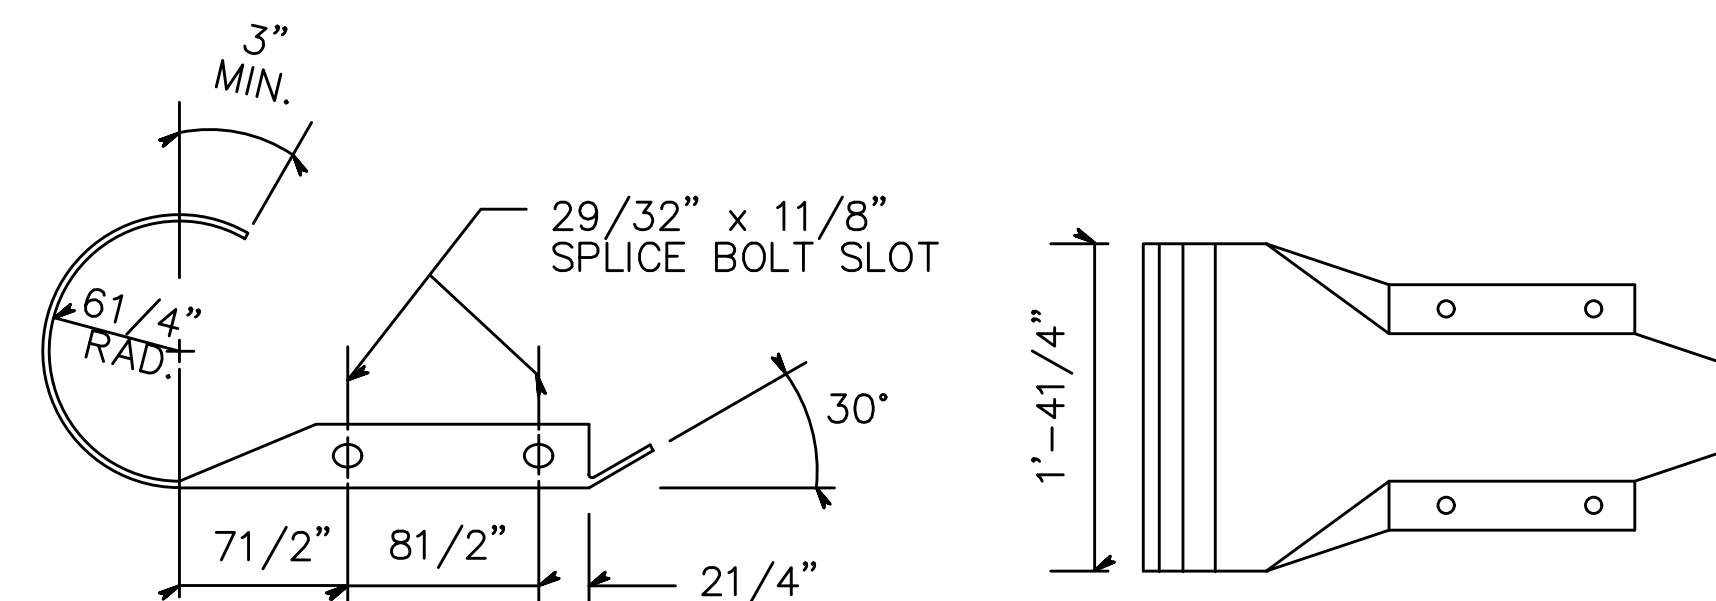

END SECTION (ROUNDED)

NOTES:







- ALL DIMENSIONS ARE SUBJECT TO MANUFACTURING TOLERANCES.
- FURNISH RAIL ELEMENTS SHOPCURVED, CONCAVE OR CONVEX, FOR RADII BETWEEN 20 AND 150 FEET.
- WHERE TRANSITIONING TO EXISTING GUIDE RAIL, AN END TERMINAL, OR A CRASH CUSHION MOUNTED AT A HEIGHT OTHER THAN 2'-7", THE VERTICAL TRANSITION TO BE ACCOMPLISHED IN A MINIMUM LENGTH OF 12'-6" FOR EACH 2" OF VERTICAL CHANGE. SEE CD-609-8.
- INSTALL AN END TERMINAL AS SHOWN ON THE PLANS. USE THE END SECTION (ROUNDED) ON THE END OF THE RAIL ELEMENT WHERE DUAL FACED BEAM GUIDE RAIL ENDS AND SINGLE FACED BEAM GUIDE RAIL BEGINS.

NEW JERSEY DEPARTMENT OF TRANSPORTATION


CONSTRUCTION DETAILS

CD-609-1.1



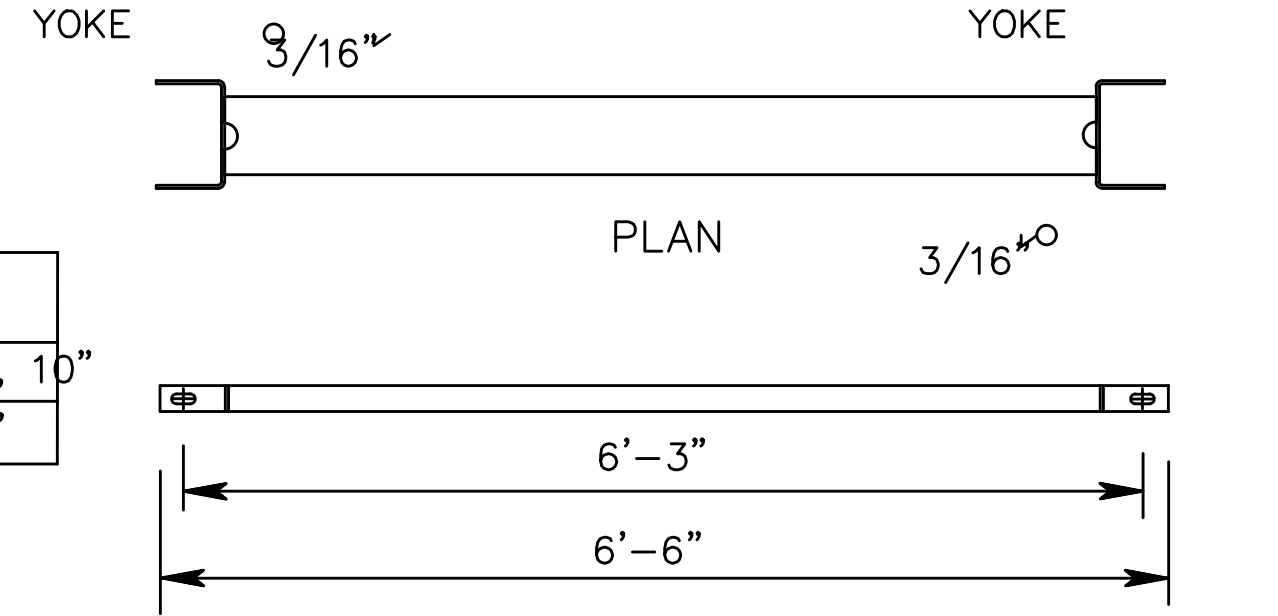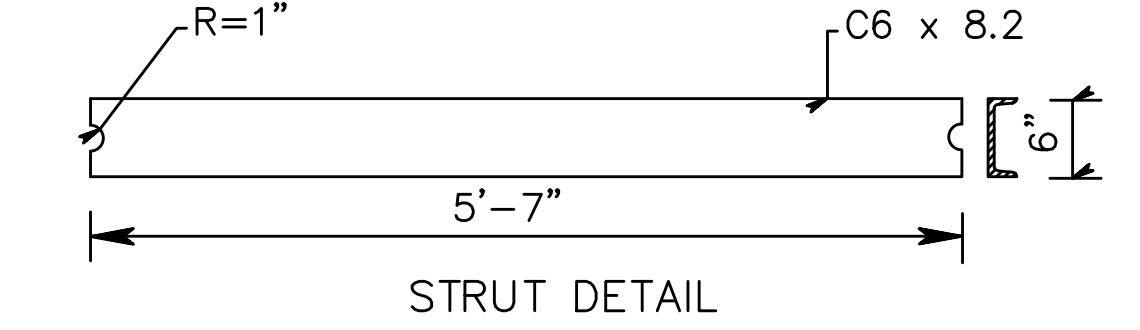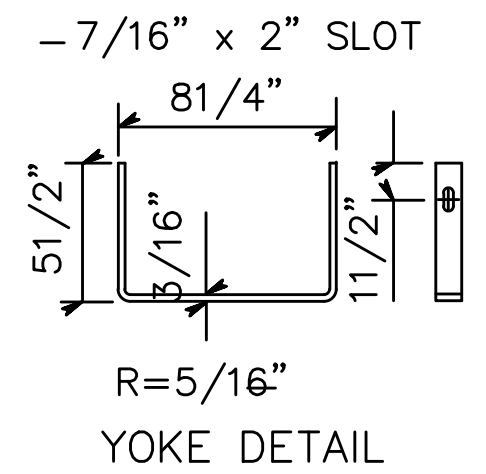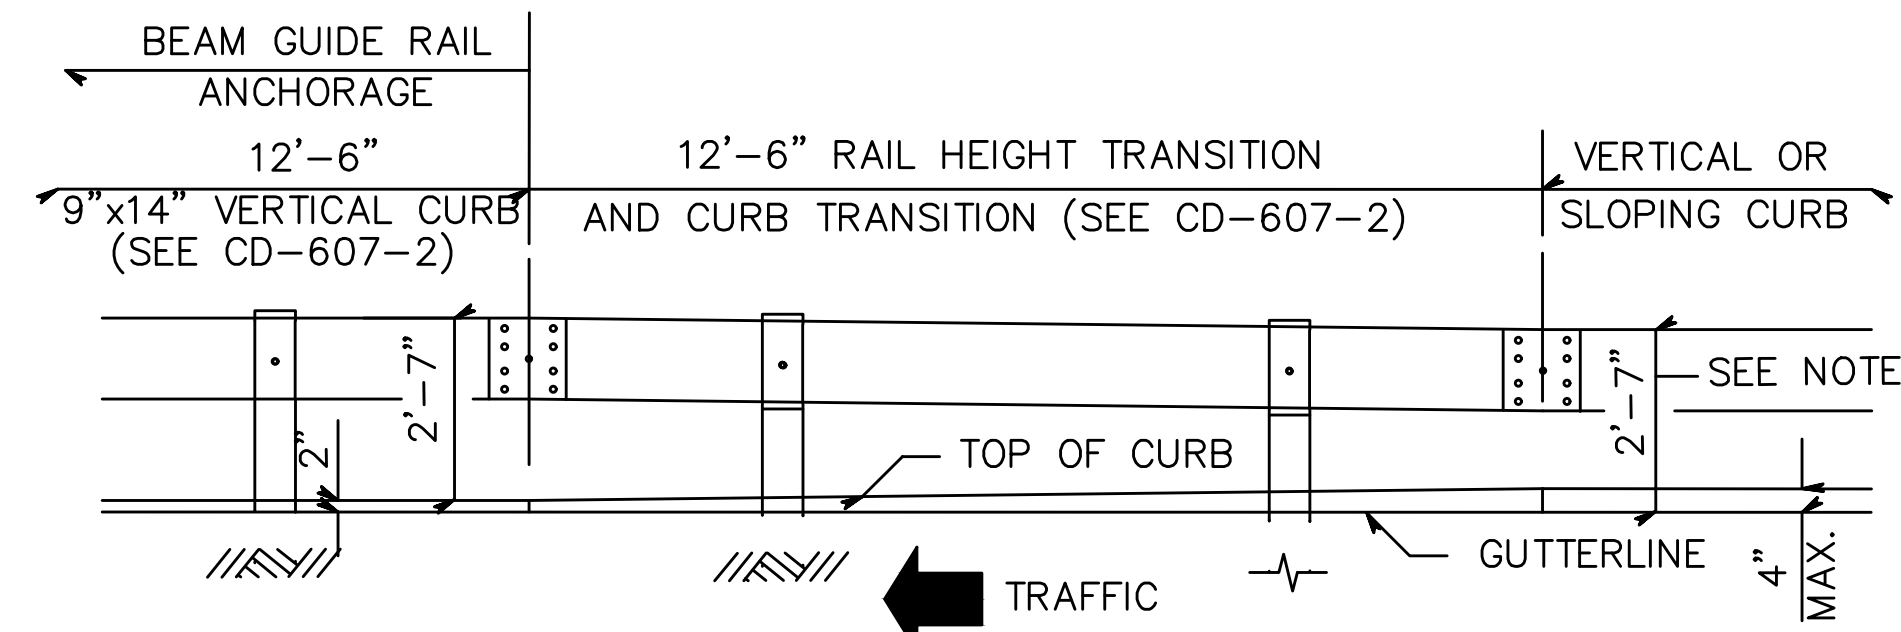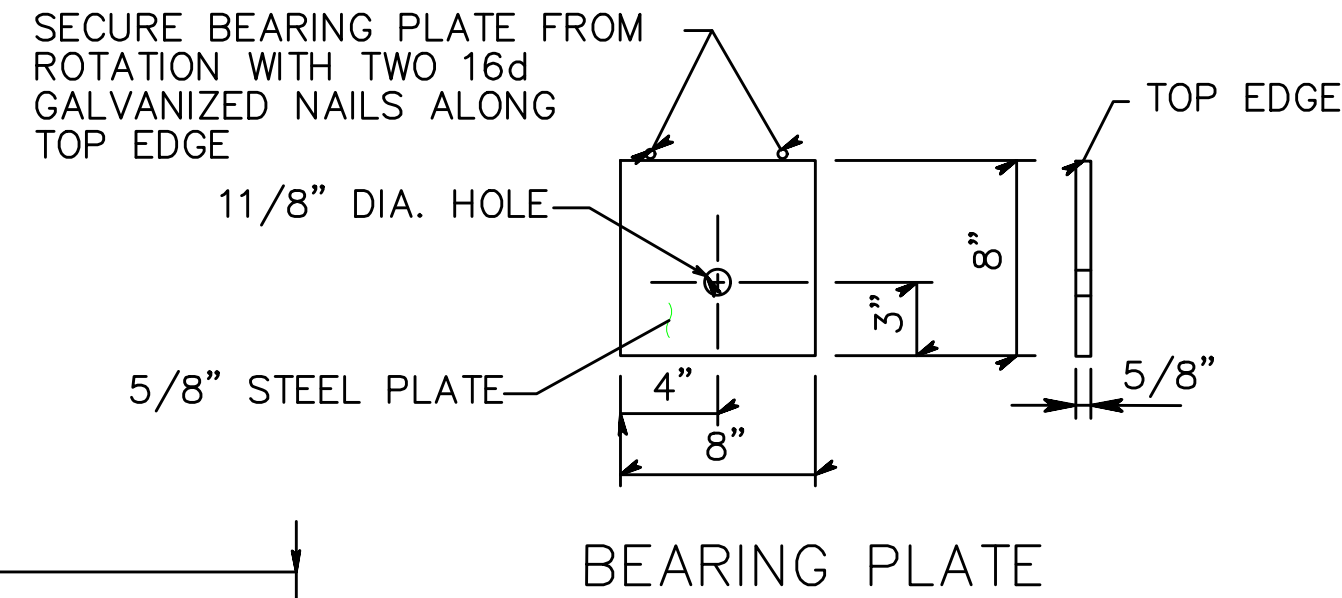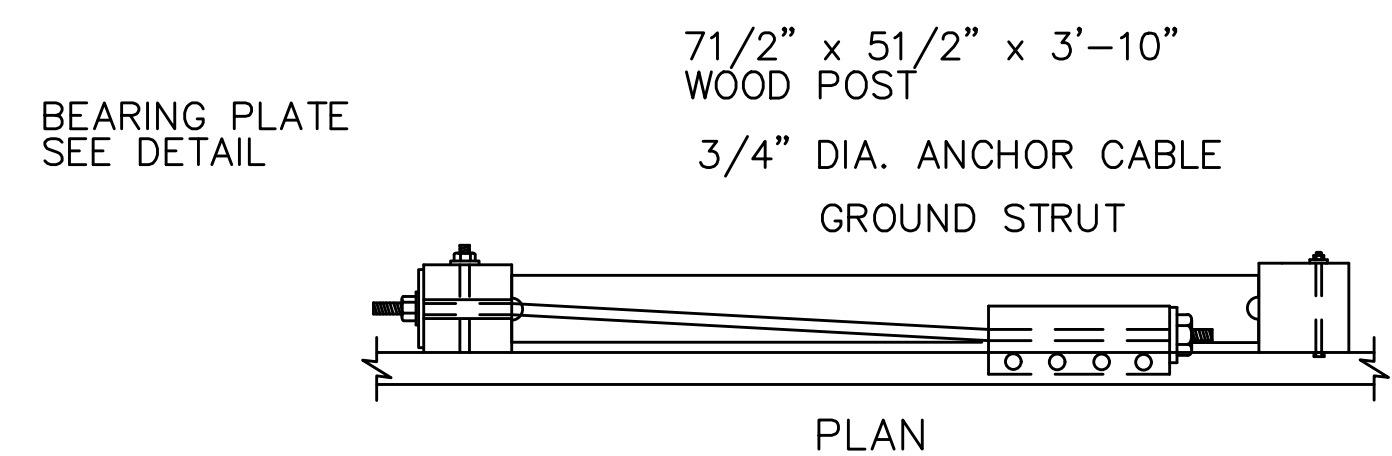


NOTE:  
WHERE GUIDE RAIL IS OFFSET 4 FEET OR MORE FROM THE  
GUTTERLINE (CD-609-8A) RAIL HEIGHT IS MEASURED FROM  
THE GROUND LINE ALONG THE ENTIRE LENGTH OF THE  
CURB TRANSITION AND THE GUIDE RAIL ANCHORAGE.

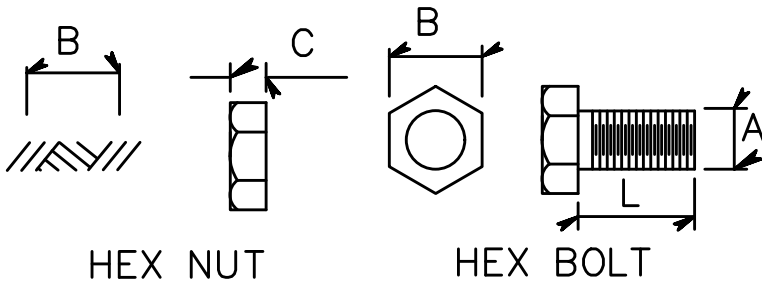


BOLT SIZE	THREAD PITCH	A	B	C	L
5/8"	5/8-11	5/8"	15/16"	5/8"	1 1/2", 10"
7/8"	7/8-9	7/8"	15/16"	3/4"	8"


HEX NUT AND BOLT

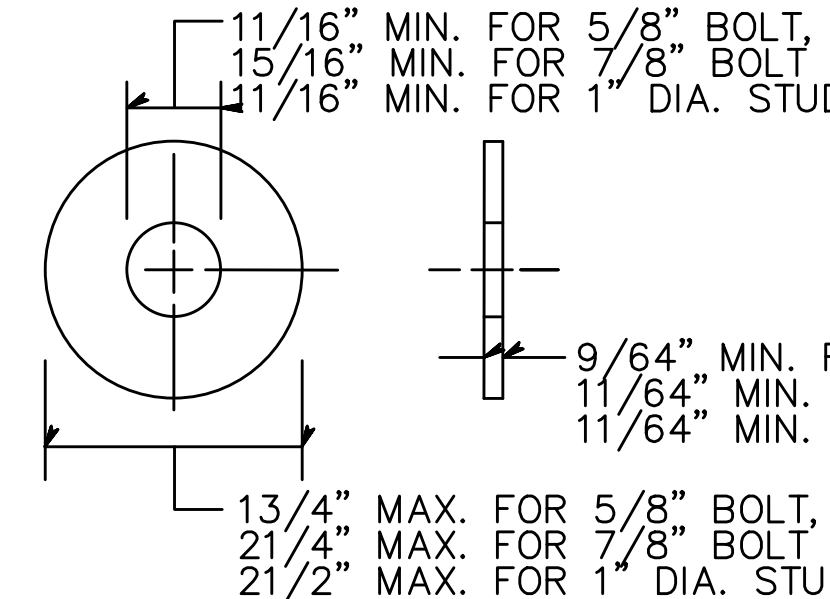


STEEL WASHER

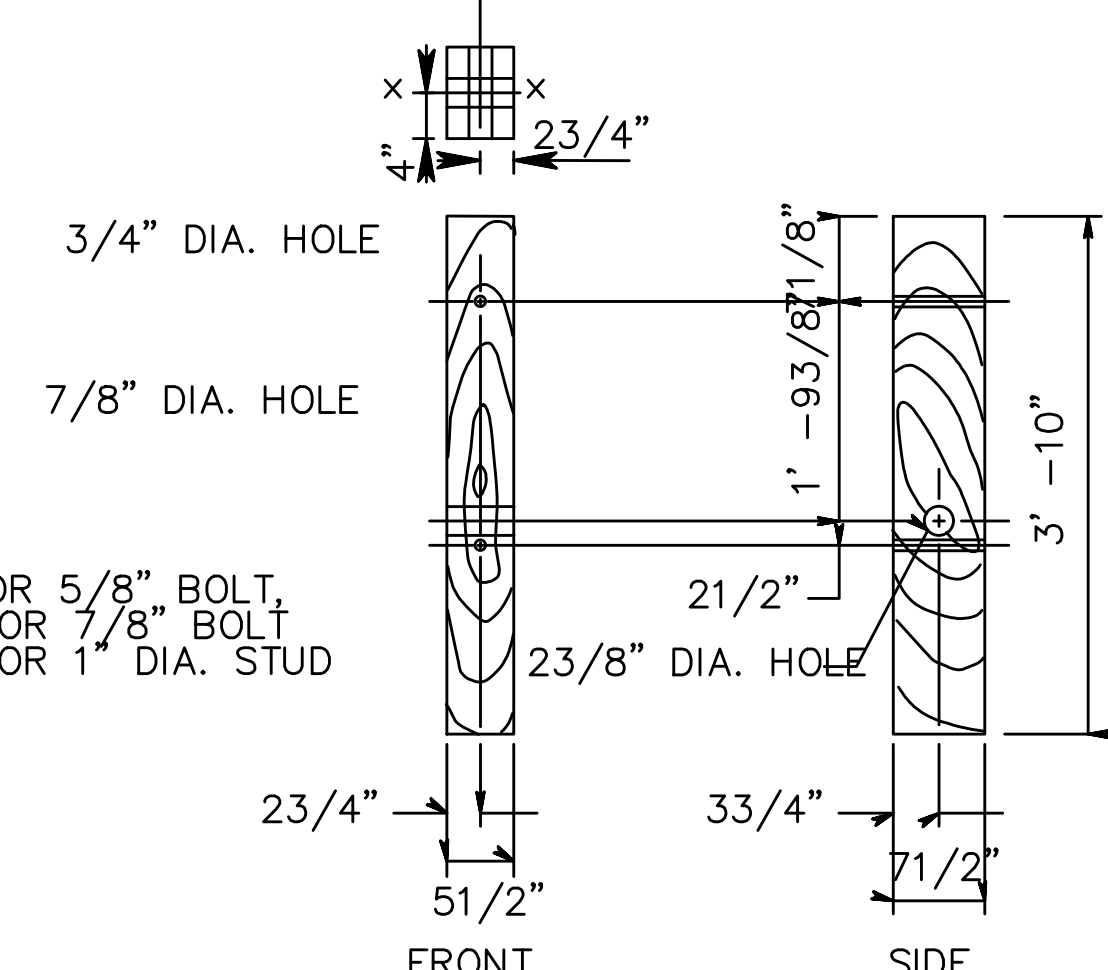



WOOD POST

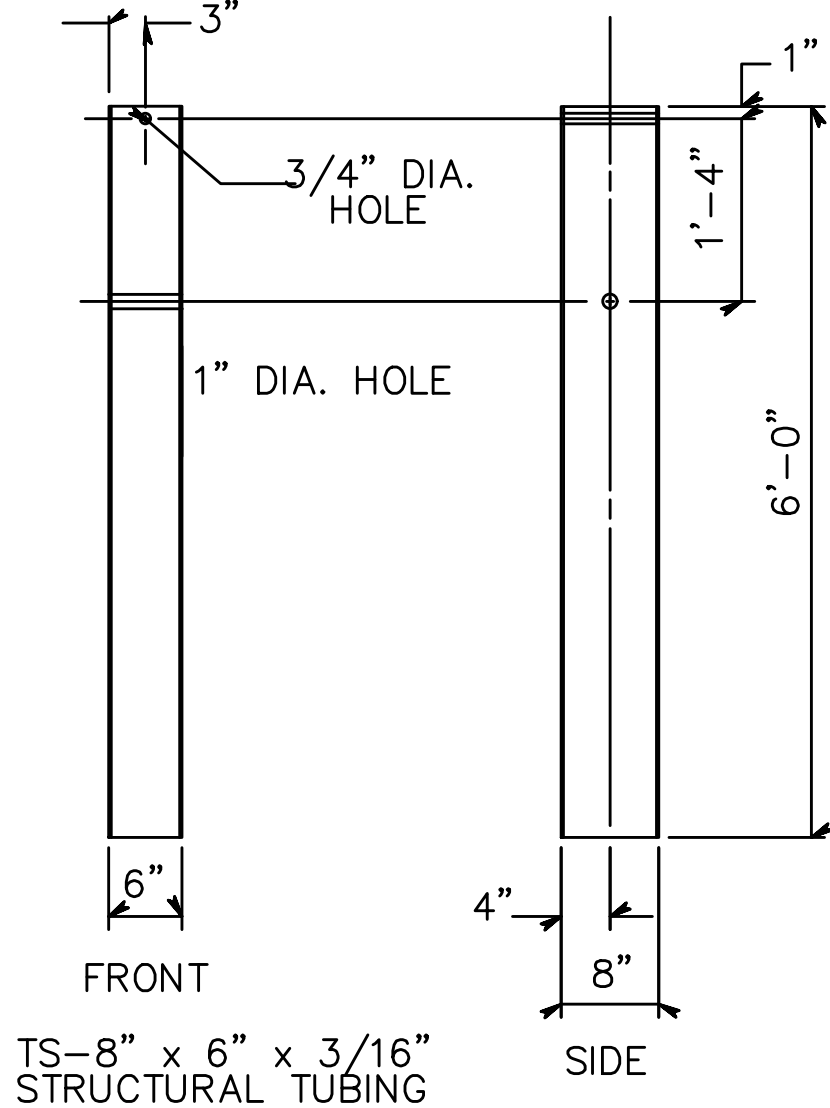



STEEL FOUNDATION TUBE

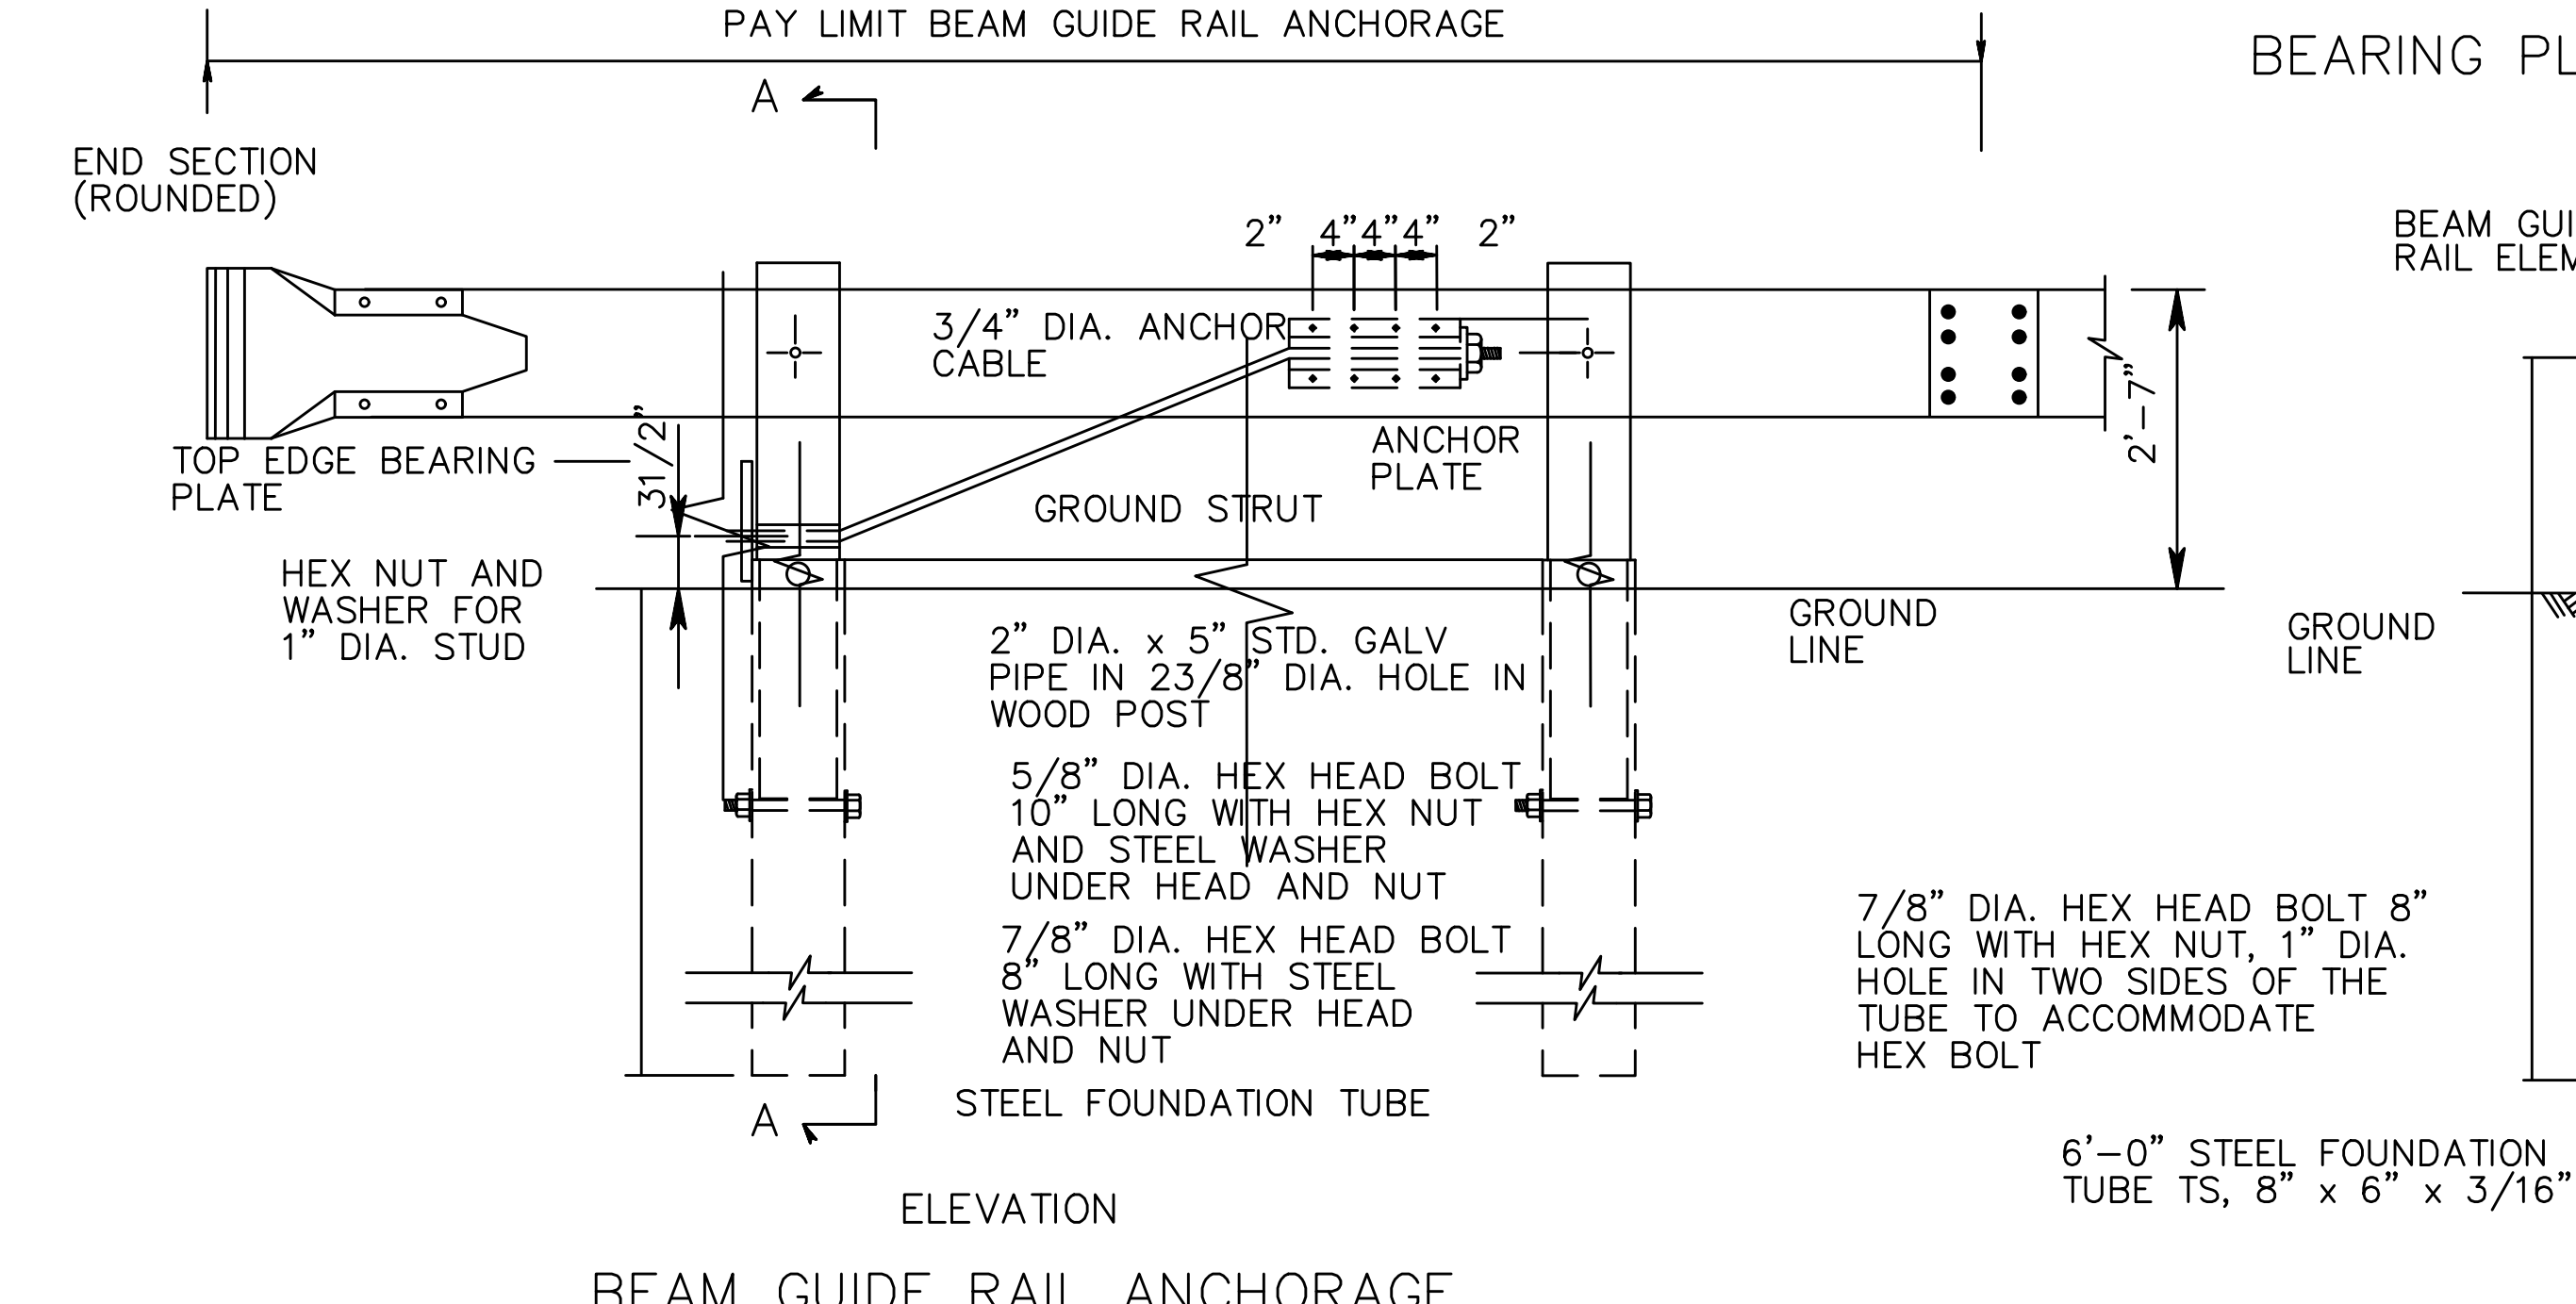


SECTION A-A

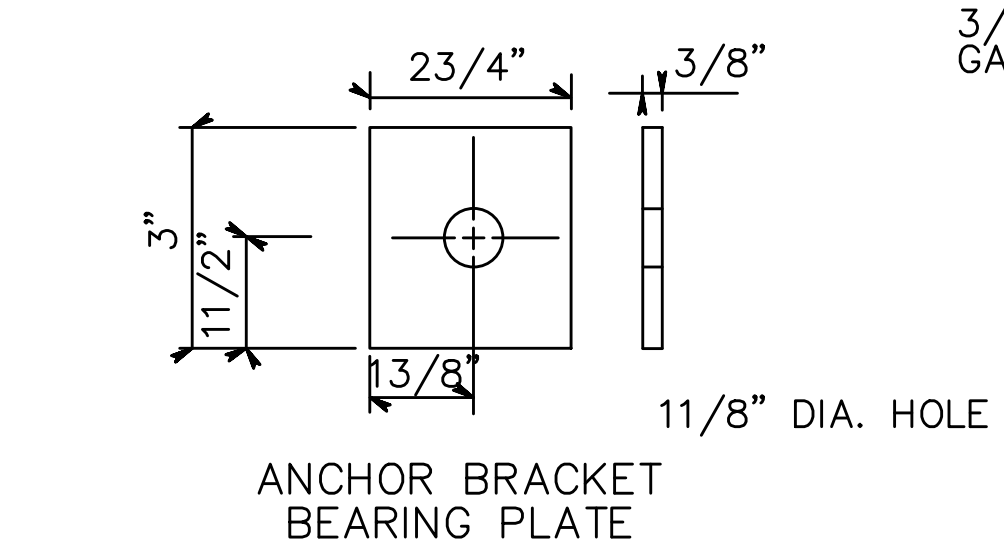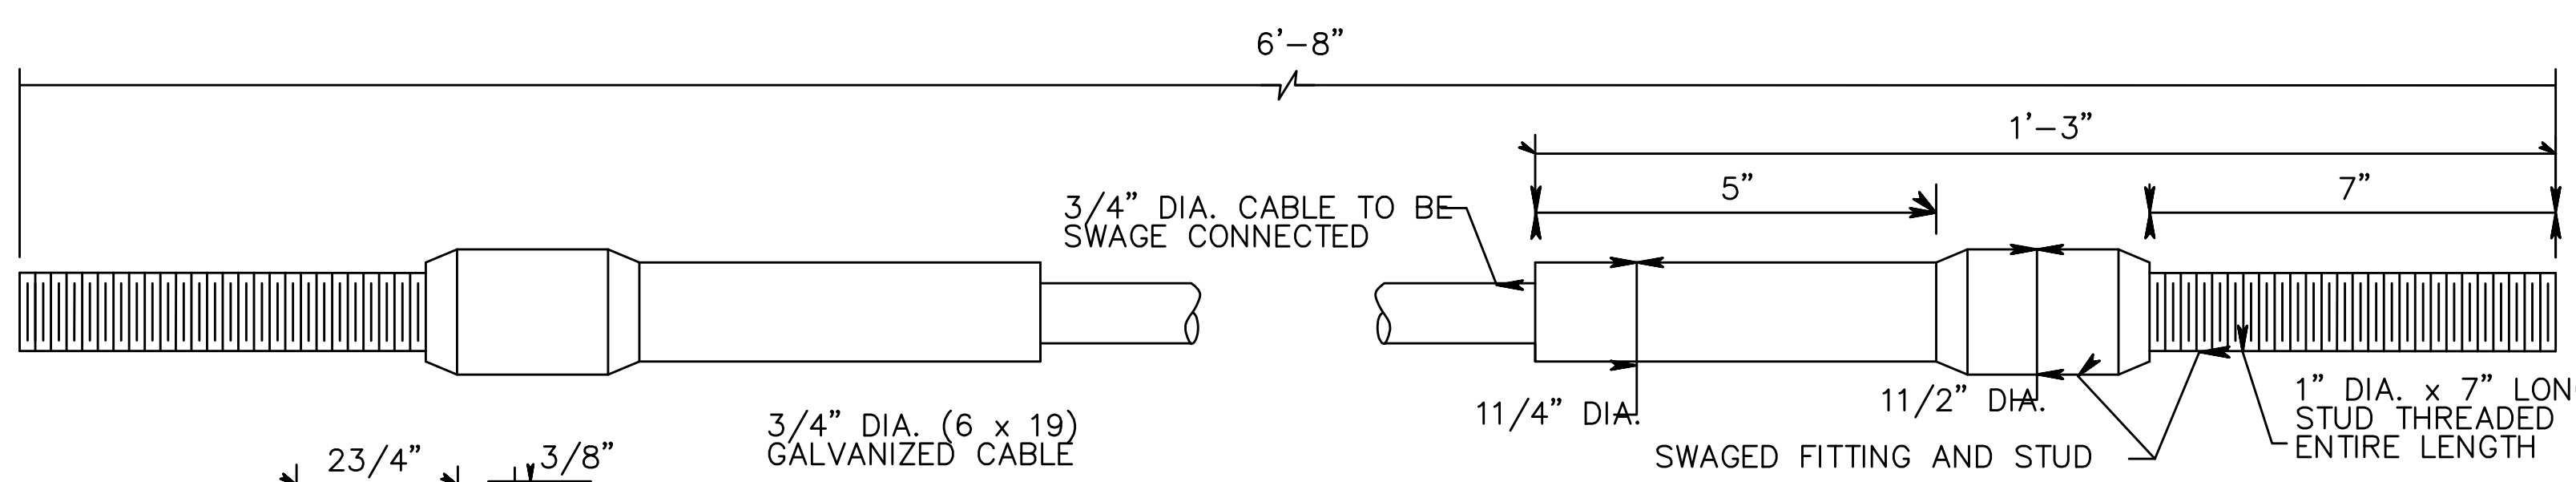


NOTE:  
OTHER ANCHOR CABLE ASSEMBLIES MAY BE USED. MINIMUM  
BREAKING STRENGTH OF ASSEMBLY TO BE 40,000 LBS.

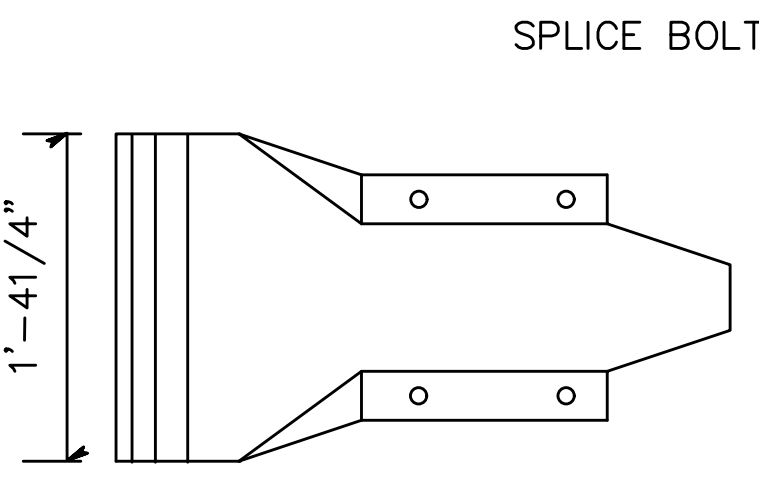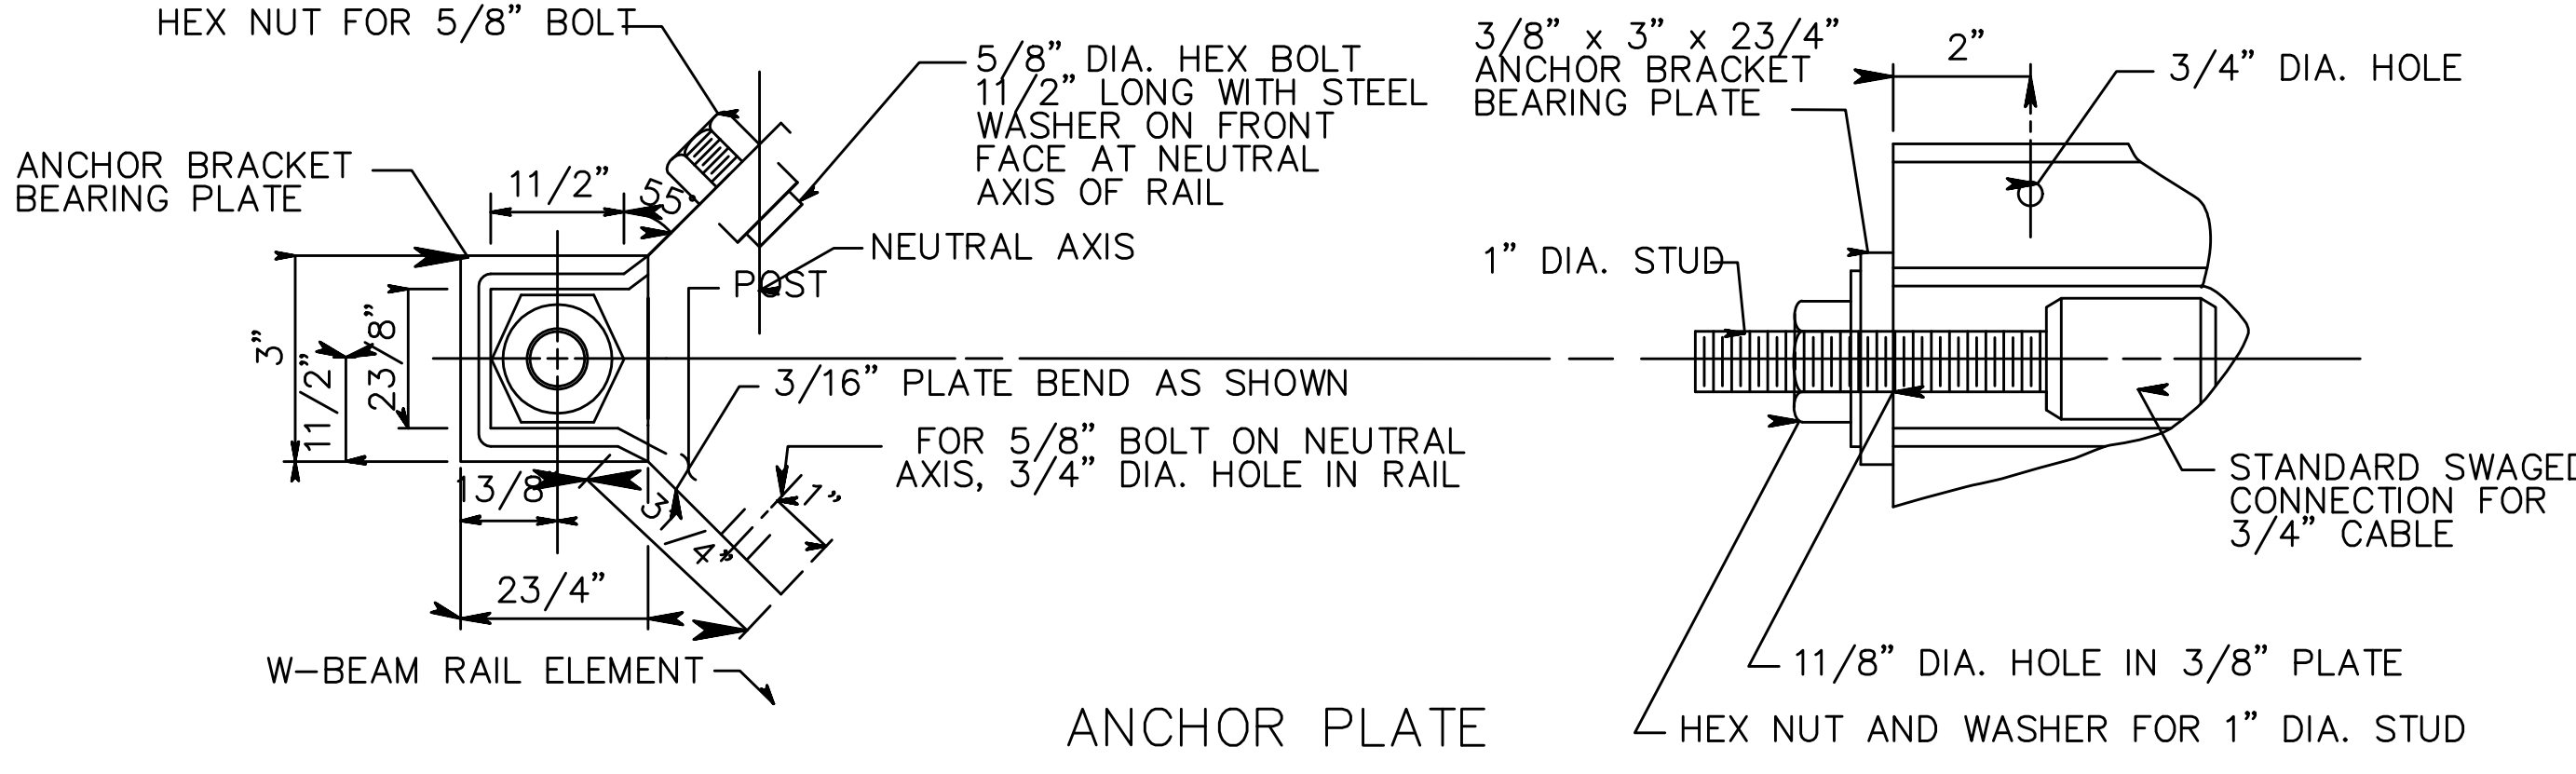

SPLICE BOLTS

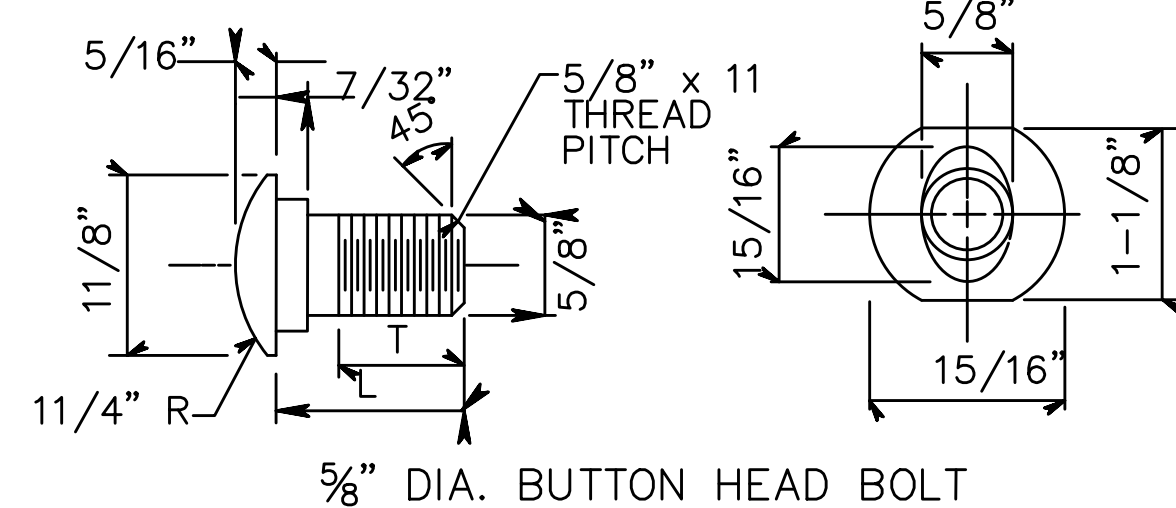

TYPE	L	MIN. THREAD LENGTH (T)
RAIL	10"	4"
SPLICE	11/4"	FULL LENGTH THREAD

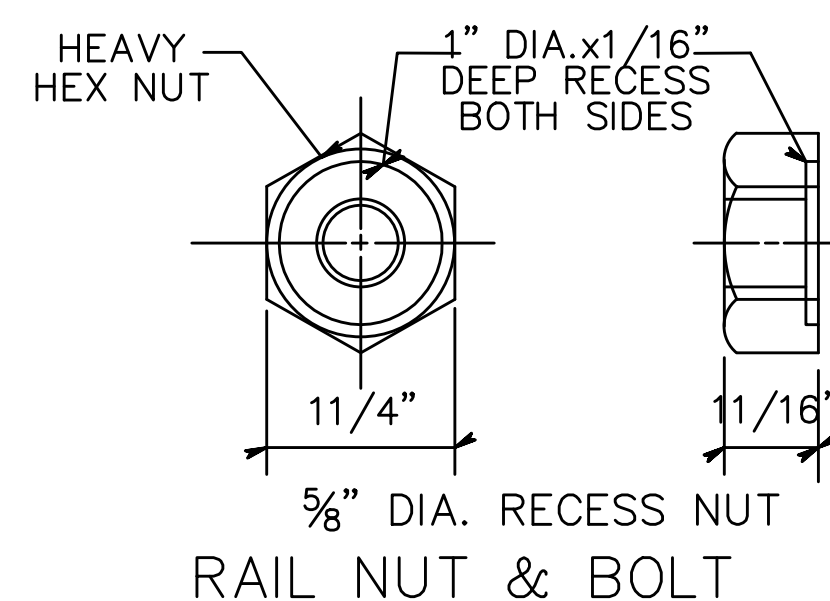

BEAM GUIDE RAIL ANCHORAGE (MASH TL-3)  
N.T.S.


CD-609-4  
NEW JERSEY DEPARTMENT OF TRANSPORTATION

CONSTRUCTION DETAILS


CD-609-4.1




- NOTES:
- 1. NUMBER OF POSTS, TYPE OF POST, POST SPACING, FLARE RATE, AND MATERIALS TO BE IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND THE DEPARTMENT'S QUALIFIED PRODUCTS LIST.
  - 2. WHERE GUIDE RAIL IS INSTALLED FLUSH WITH THE GUTTER LINE, CONSTRUCT THE TANGENT TERMINAL WITH A STRAIGHT FLARE FOR ITS ENTIRE LENGTH TO PROVIDE A ONE FOOT OFFSET SO THAT THE EXTRUDER HEAD DOES NOT PROTRUDE INTO THE ROADWAY.
  - 3. WHERE THE DOWNSTREAM GUIDE RAIL IS ON A HORIZONTAL CURVE, CONSTRUCT THE FLARED OR TANGENT TERMINAL IN A STRAIGHT LINE AS SHOWN ON THIS DETAIL (DO NOT FOLLOW THE HORIZONTAL CURVE).
  - 4. 9"x14" CONCRETE VERTICAL CURB SHALL CONTINUE FOR THE ENTIRE LENGTH OF THE TERMINAL AND FOR A MINIMUM OF 75 FEET IN ADVANCE OF POST #1. SEE CD-607-2 FOR CURB TRANSITION DETAILS.
  - 5. WHERE GUIDE RAIL IS OFFSET 4 FEET OR MORE FROM THE GUTTERLINE (CD-609-8A) RAIL HEIGHT IS MEASURED FROM THE GROUND LINE ALONG THE ENTIRE LENGTH OF THE CURB TRANSITION AND THE FLARED OR TANGENT TERMINAL.

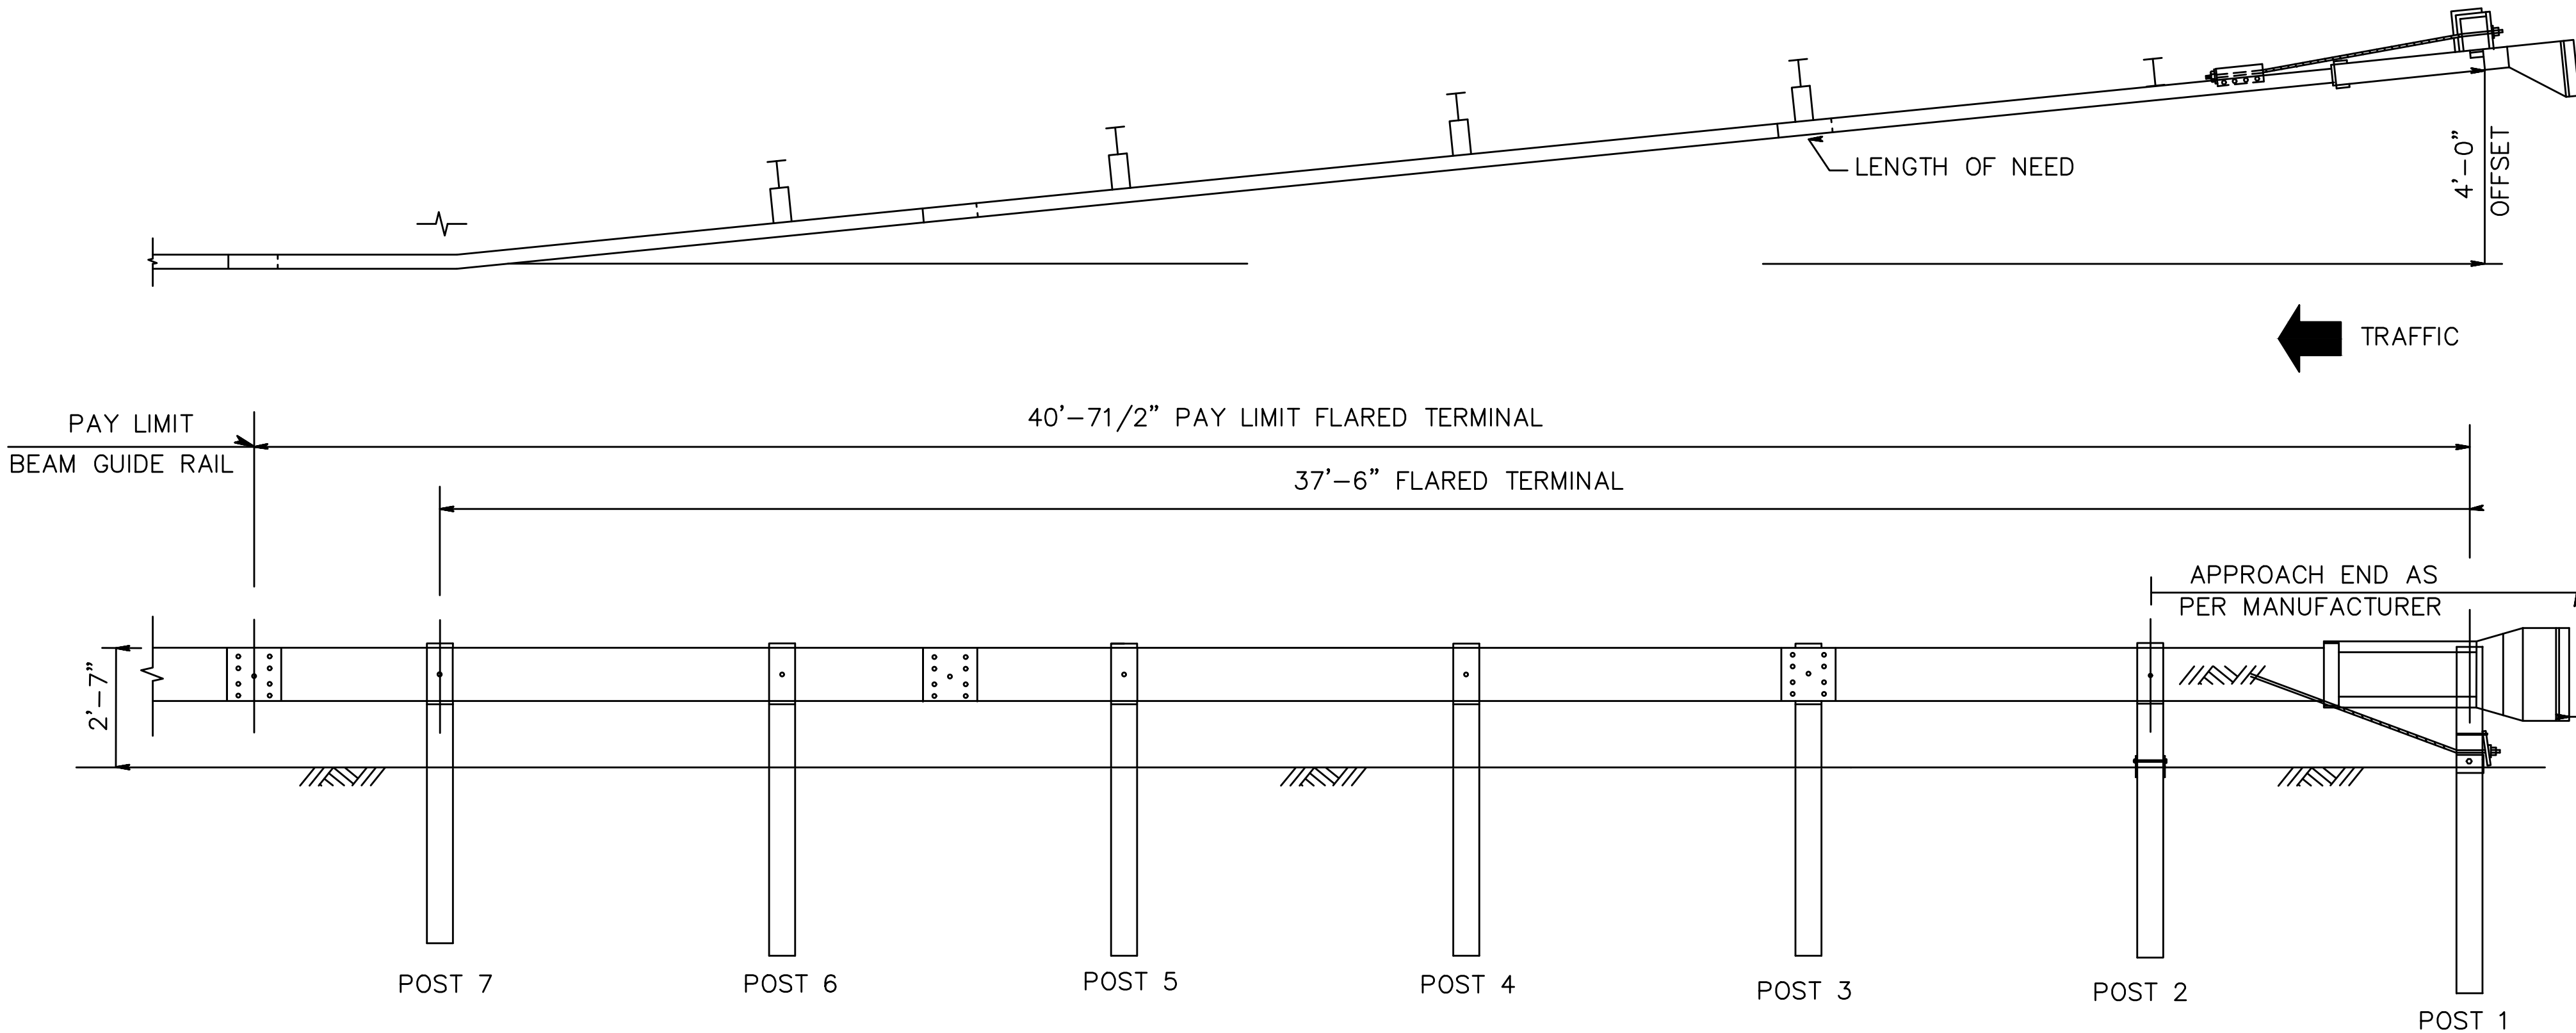

FLARED GUIDE RAIL TERMINAL

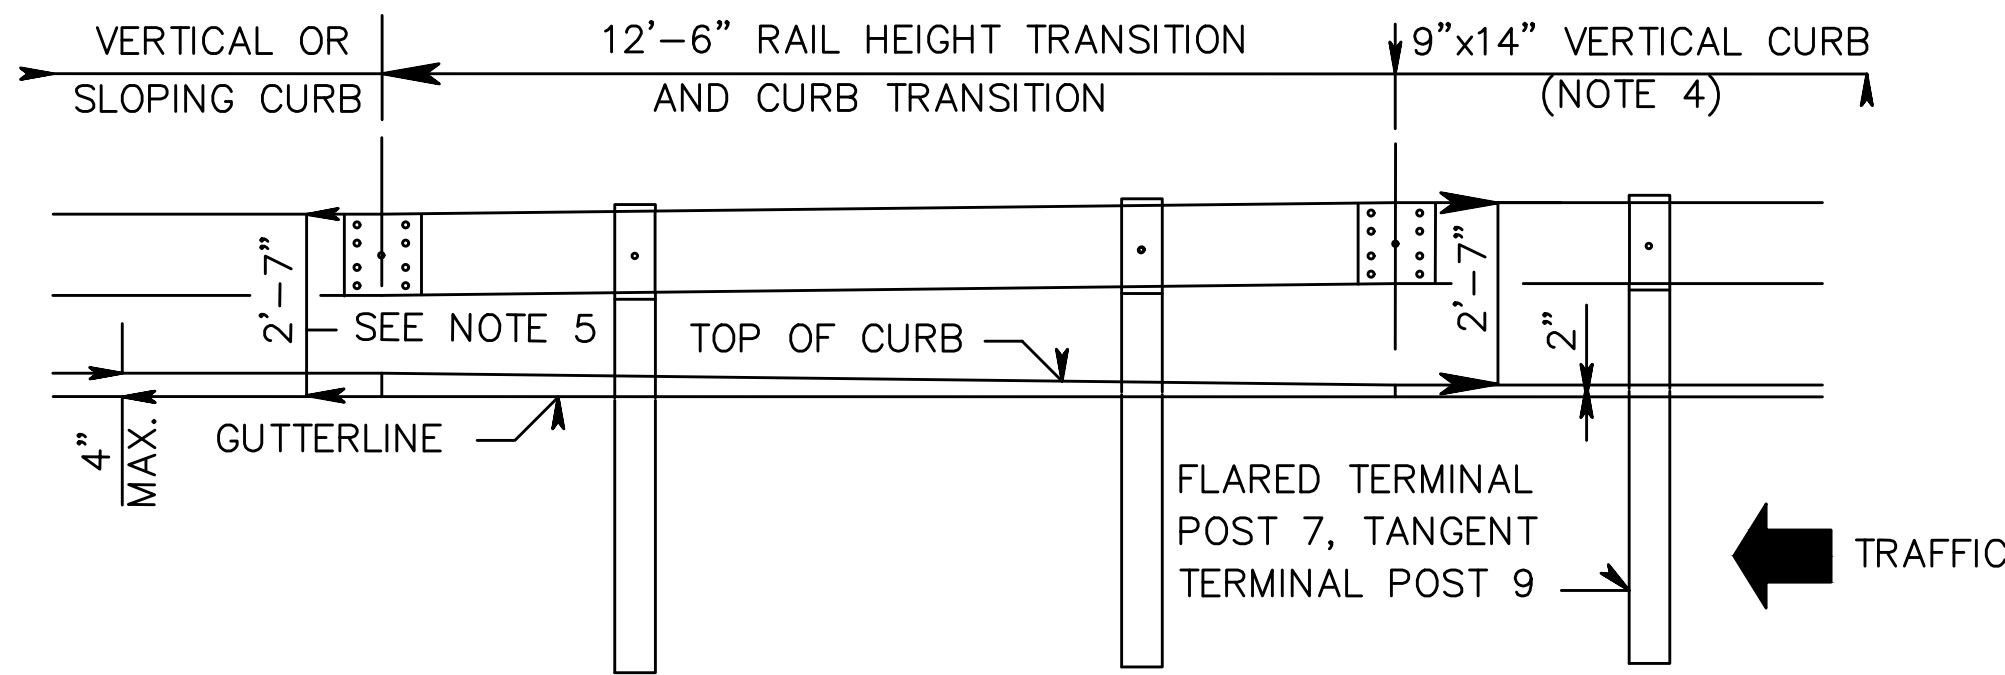

FLARED OR TANGENT TERMINAL WITH CURB

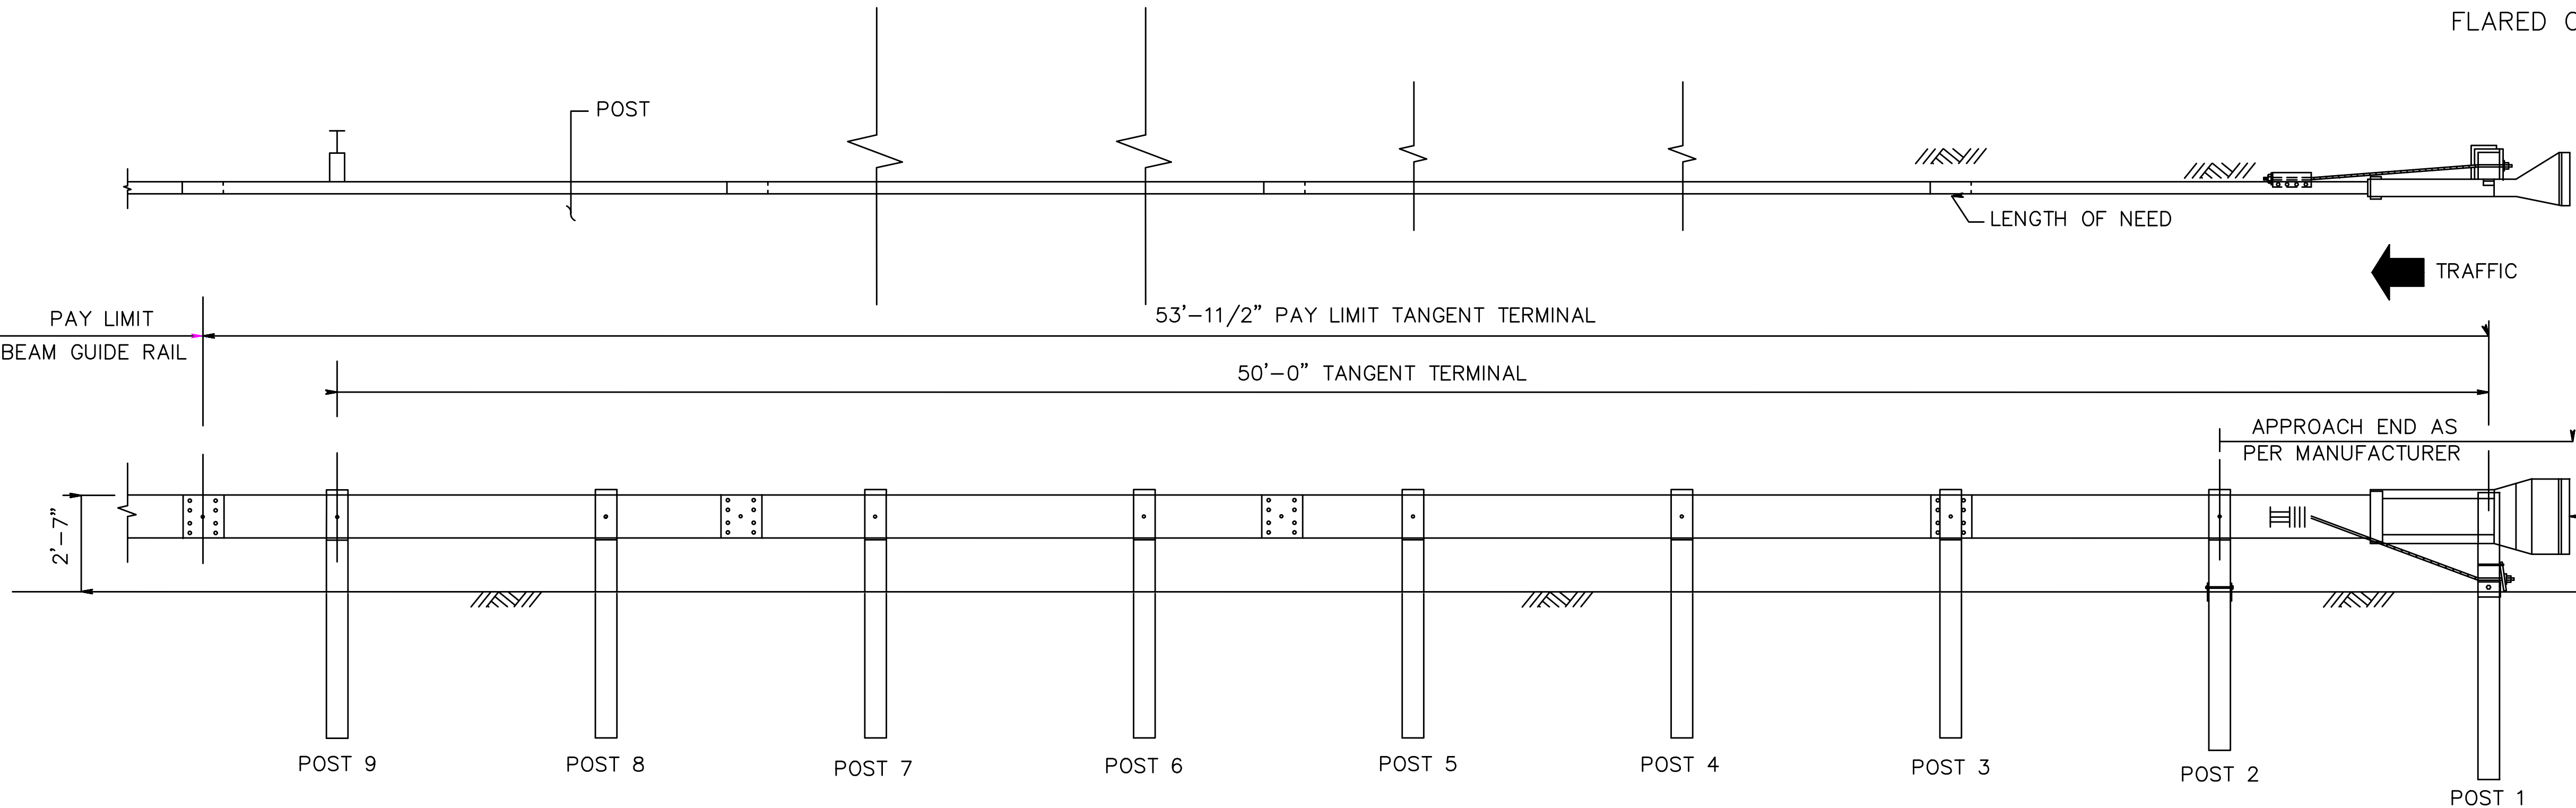

TANGENT GUIDE RAIL TERMINAL

FLARED GUIDE RAIL  
TERMINAL AND  
TANGENT GUIDE  
RAIL TERMINAL  
(MASH TL-3)  
N.T.S.


CD-609-5  
NEW JERSEY DEPARTMENT OF TRANSPORTATION

CONSTRUCTION DETAILS


CD-609-5.1

BDC17D-10-TERMINAL WITH CURB ADDED  
BDC17D-02-REVISIONS TO CD-609-5  
BDC16D-01-ORIGINAL SHEET



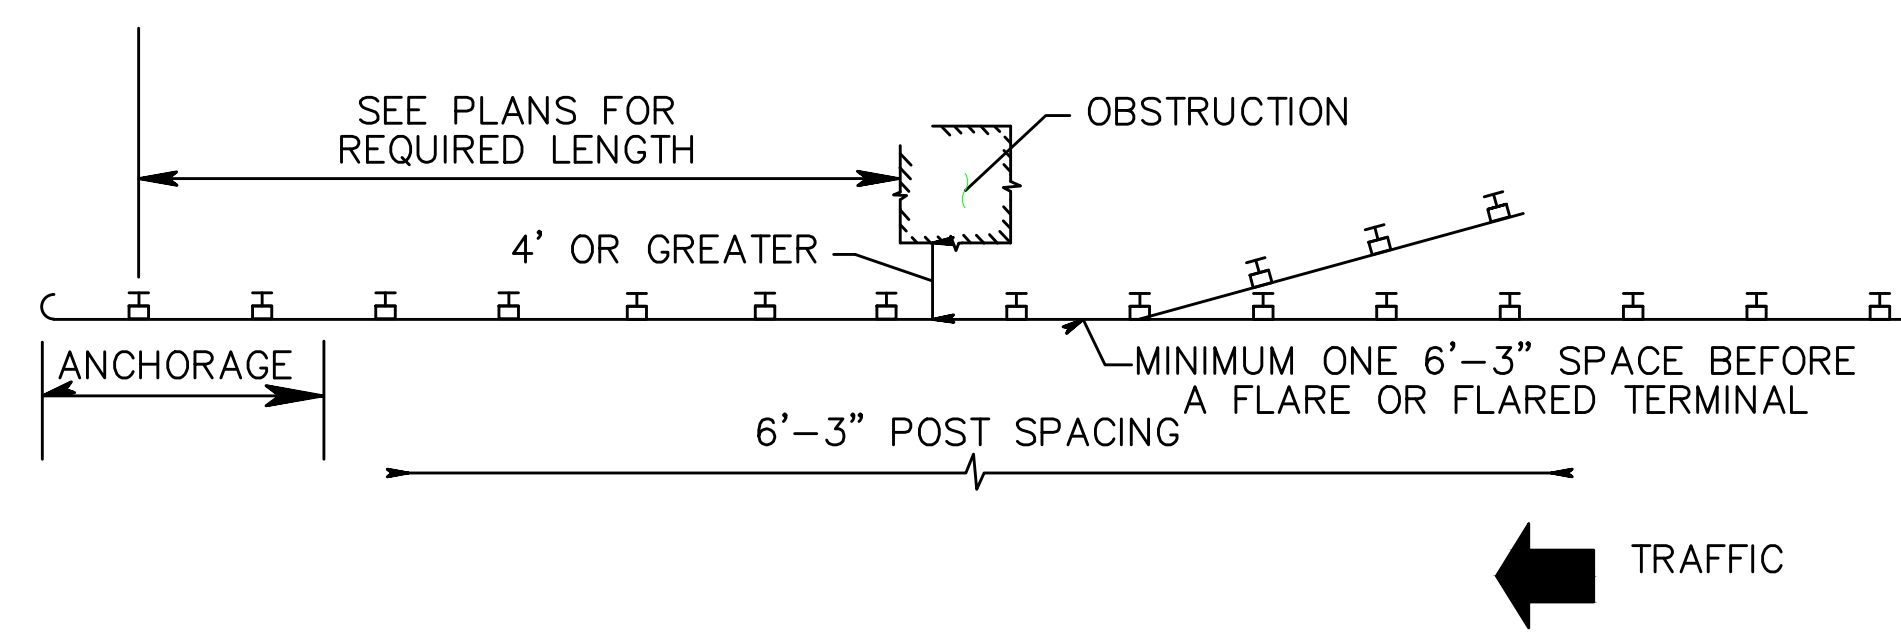


WHERE CLEARANCE FROM FACE OF RAIL TO OBSTRUCTION IS 4' OR GREATER (SEE NOTE 2)

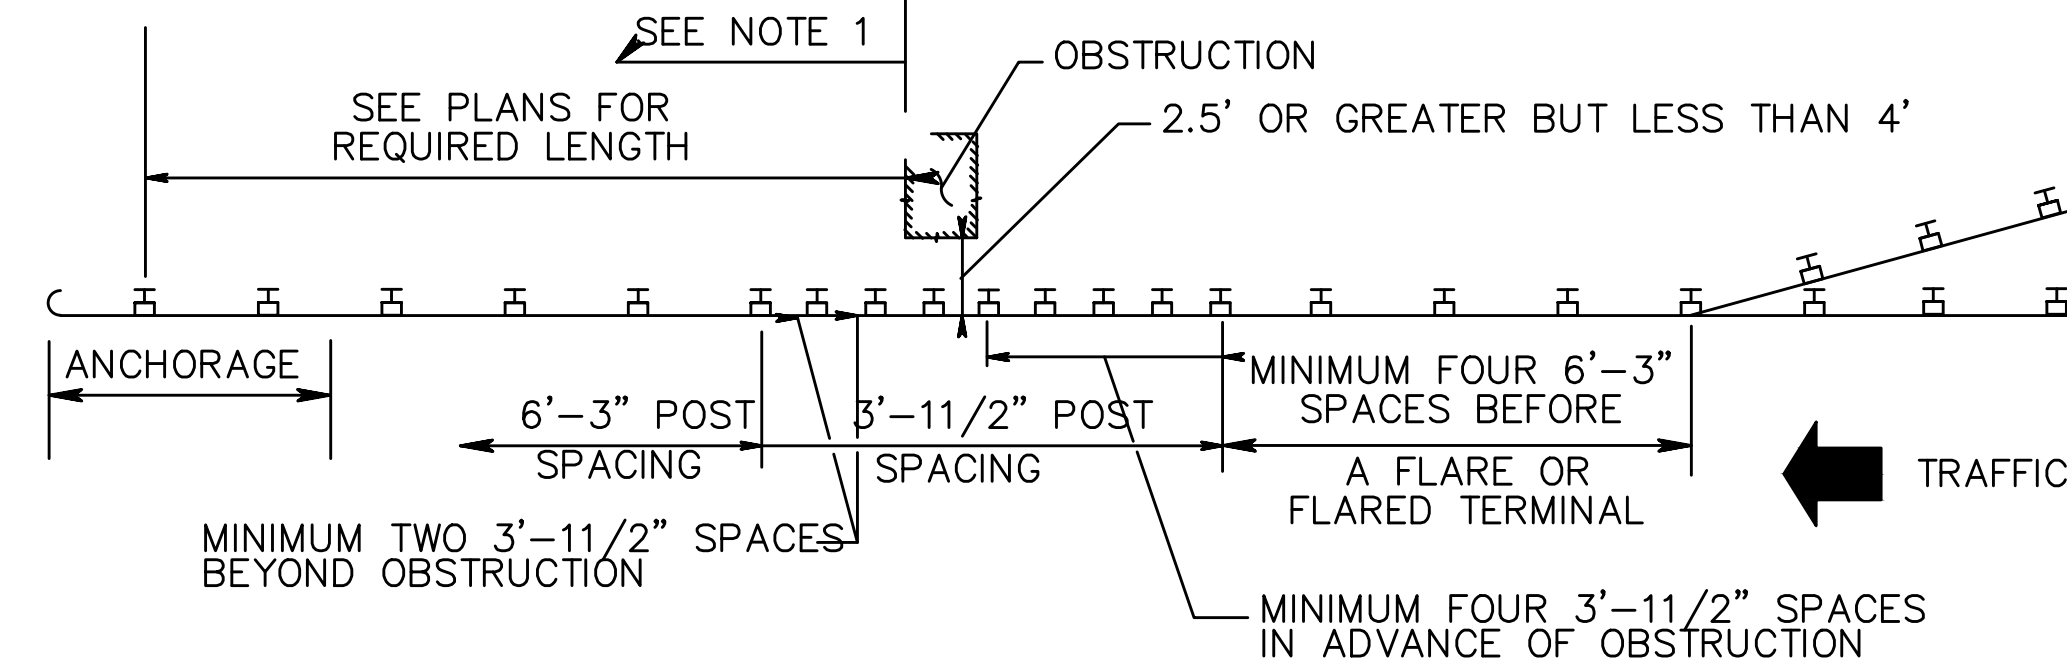


WHERE CLEARANCE FROM FACE OF RAIL TO OBSTRUCTION IS 2.5' OR GREATER BUT LESS THAN 4' (SEE NOTE 2)

DISTANCE FROM BACK OF POST TO PVI	SLOPE	ADDITIONAL POST LENGTH
IF LESS THAN 2' BUT GREATER OR EQUAL TO 1'	6:1 OR FLATTER STEEPER THAN 6:1 TO 3:1 STEEPER THAN 3:1 TO 2:1	NO CHANGE 1' 2'
IF LESS THAN 1'	6:1 OR FLATTER STEEPER THAN 6:1 TO 3:1 STEEPER THAN 3:1 TO 2:1	1' 2' 3'

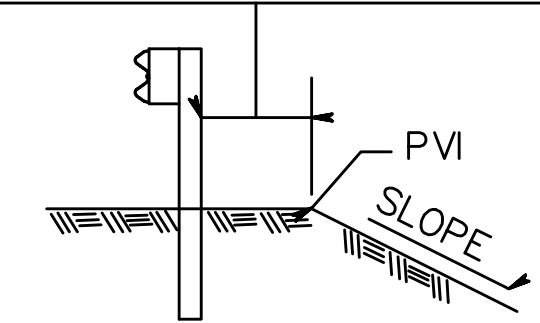

## ADDITIONAL LENGTH BEAM GUIDE RAIL POSTS

CD-609-8.2

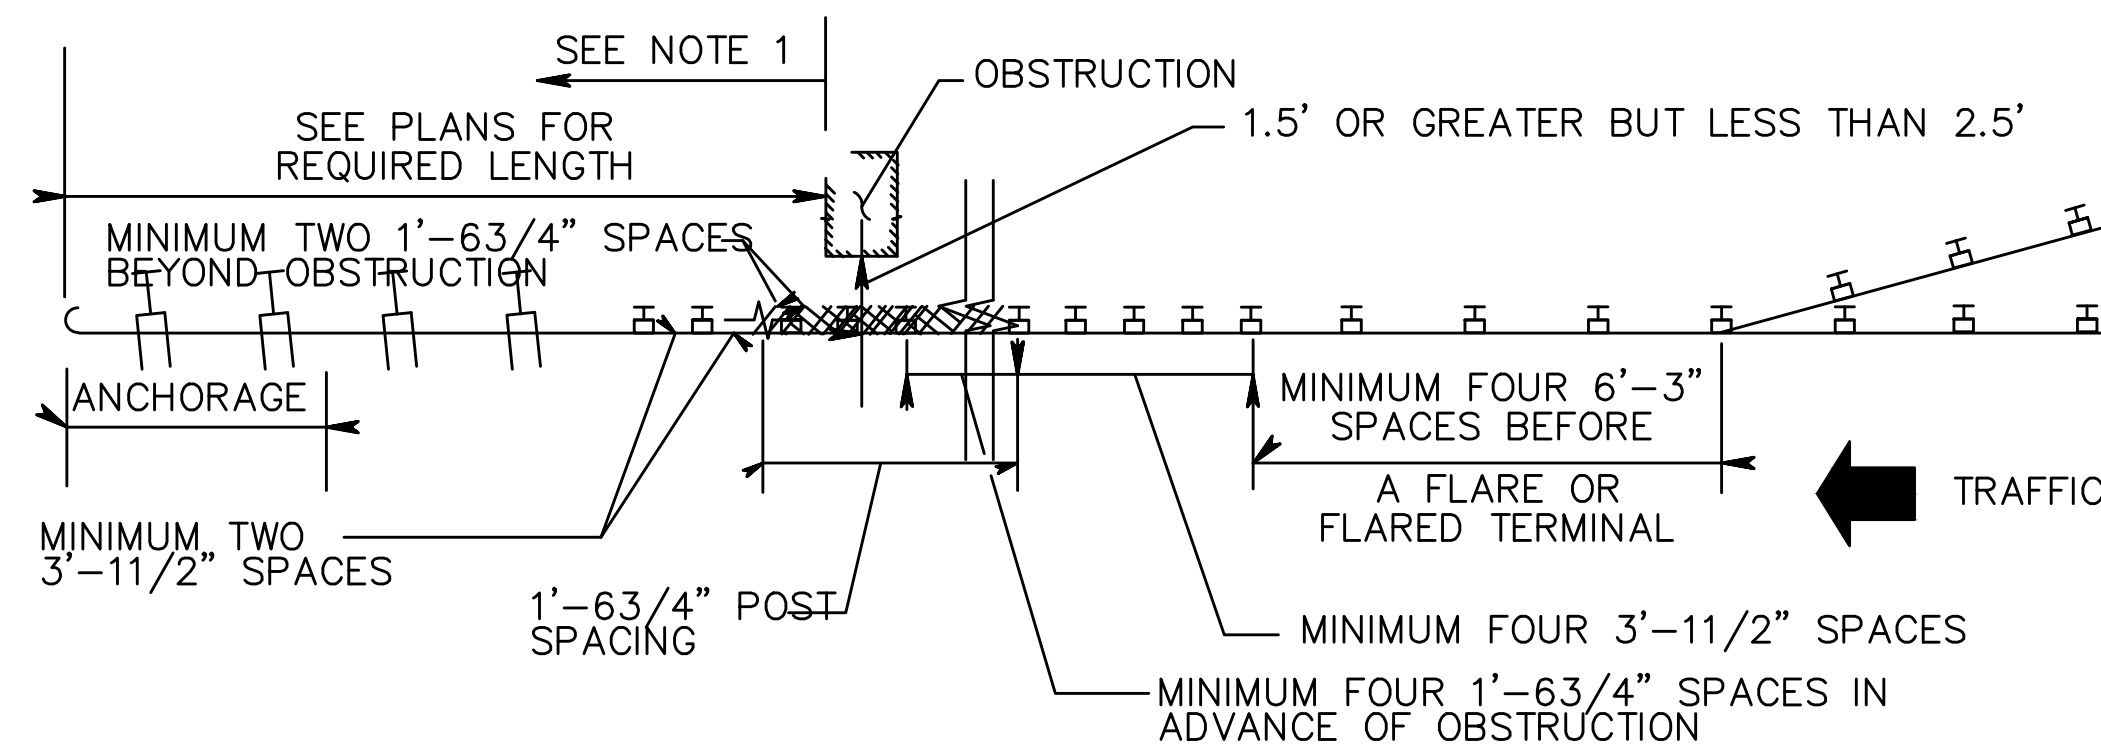


WHERE CLEARANCE FROM FACE OF RAIL TO OBSTRUCTION IS 1.5' OR GREATER BUT LESS THAN 2.5' (SEE NOTE 2)

### NOTES:


- WHERE AN APPROACH END TREATMENT AT THE TRAILING END OF GUIDE RAIL IS SHOWN ON THE PLANS, THE POST SPACING REQUIREMENTS SHALL BE THE SAME AS THE APPROACH END.
- IN A FILL SECTION WHERE THE DISTANCE FROM THE BACK OF THE POST TO THE PVI IS LESS THAN 1', AND THE SLOPE IS STEEPER THAN 3:1, THE MINIMUM CLEARANCE FROM THE FACE OF THE RAIL TO AN OBSTRUCTION IS INCREASED BY 1' DUE TO INCREASED POST DEFLECTION.
- ADDITIONAL POSTS AND BLOCKOUTS WILL BE PAID FOR UNDER PAY ITEM "BEAM GUIDE RAIL POST".

## CLEARANCE FROM FACE OF RAIL TO OBSTRUCTION

CD-609-8.1

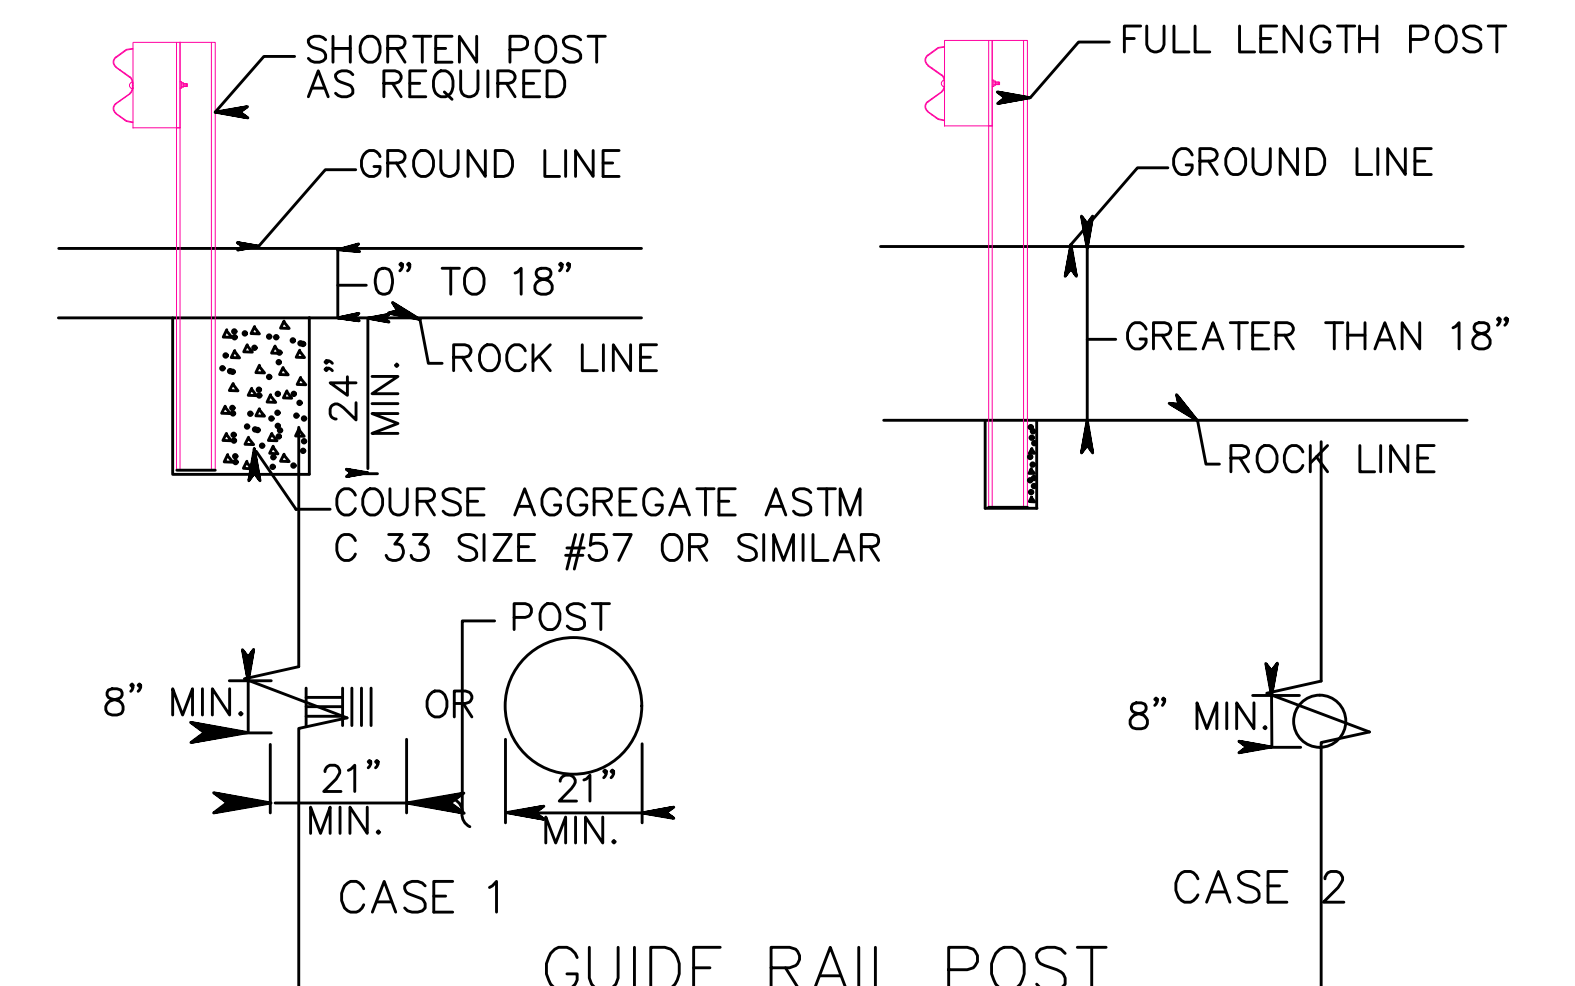

CD-609-8.3

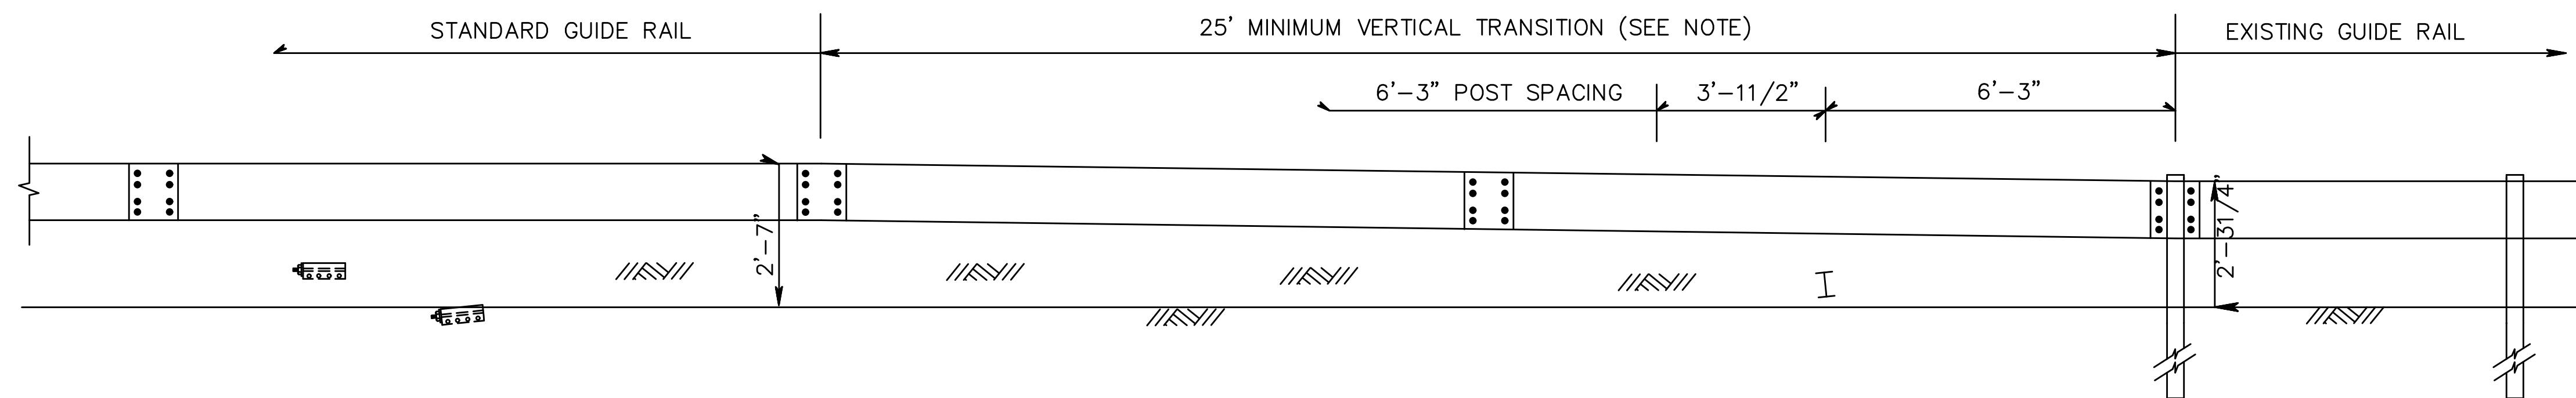

### NOTE:

WHERE TRANSITIONING TO EXISTING GUIDE RAIL, AN END TERMINAL, OR A CRASH CUSHION MOUNTED AT A HEIGHT OTHER THAN 2'-7", THE VERTICAL TRANSITION SHALL BE ACCOMPLISHED IN A MINIMUM LENGTH OF 12'-6" FOR EACH 2" OF VERTICAL CHANGE.

## VERTICAL TRANSITION TO EXISTING 27 1/4" HIGH GUIDE RAIL

CD-609-8.4

## BEAM GUIDE RAIL TREATMENTS


N.T.S.

CD-609-8

NEW JERSEY DEPARTMENT OF TRANSPORTATION

## CONSTRUCTION DETAILS



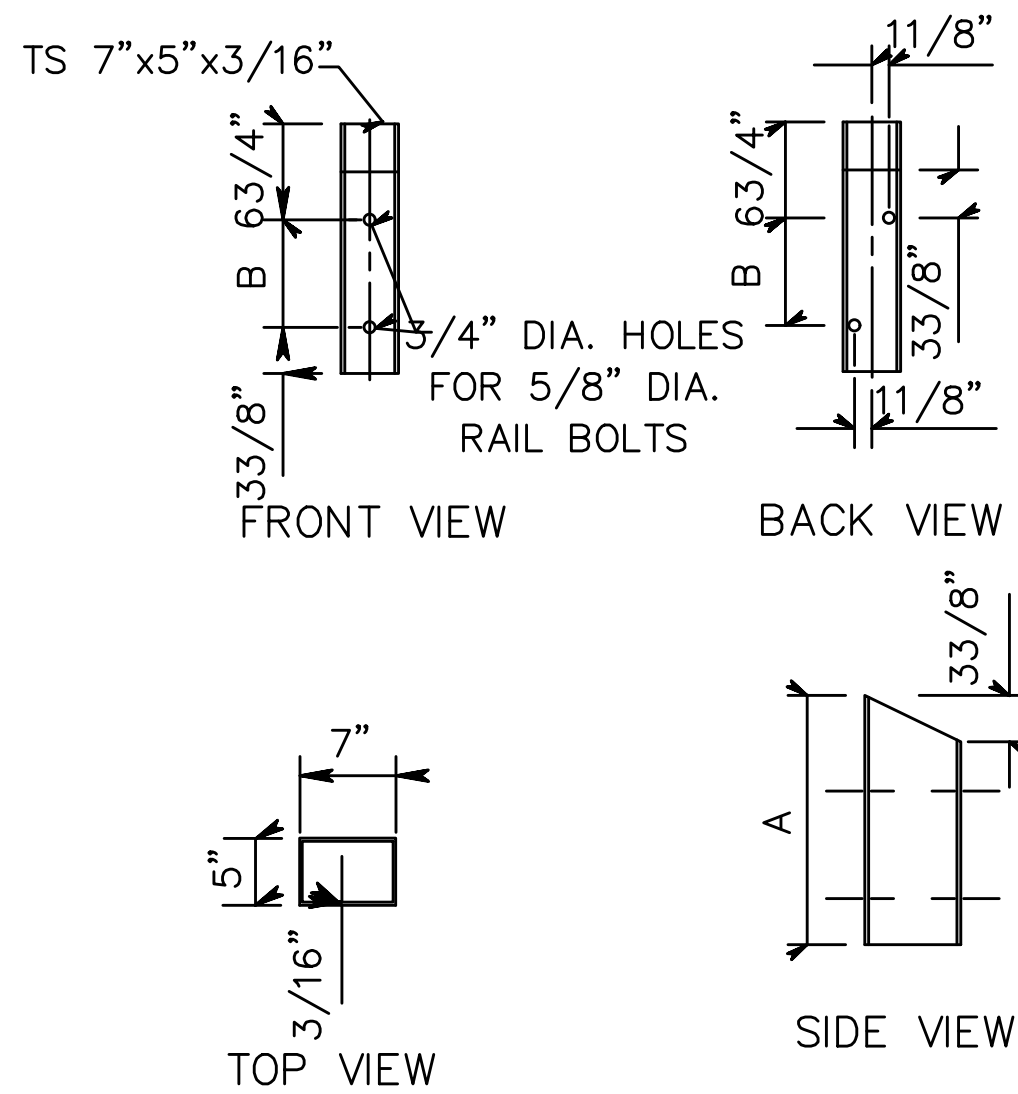


DIM.	POSTS #1 - #11	POST #12
A	1'-53/4"	1'-17/8"
B	75/8"	33/4"

BLOCKOUT DIMENSIONS


NOTES:

- STEEL FOR STRUCTURAL TUBE TO BE ASTM A500 GRADE B, WELDED AS PER ANSI/AWS D1.1 STRUCTURAL WELDING CODE, AND GALVANIZED.
- SEE CD-609-18 FOR POST AND RAIL BOLT DETAILS.

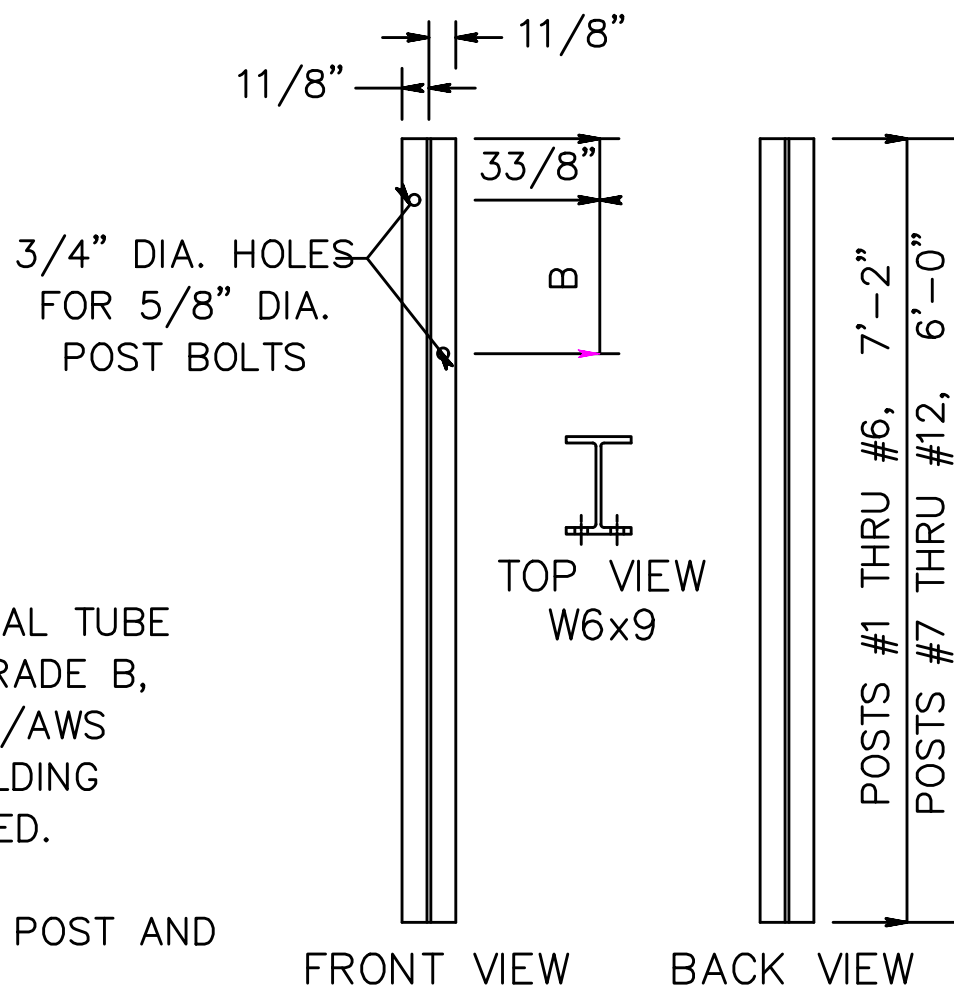


POSTS - TL-3 ATTACHMENTS  
(CD-609-14, 15, 16, 17, 17B, 17C)




STRUCTURAL TUBE BLOCKOUTS  
TL-3 ATTACHMENTS  
(CD-609-14, 15, 16, 17, 17B, 17C)

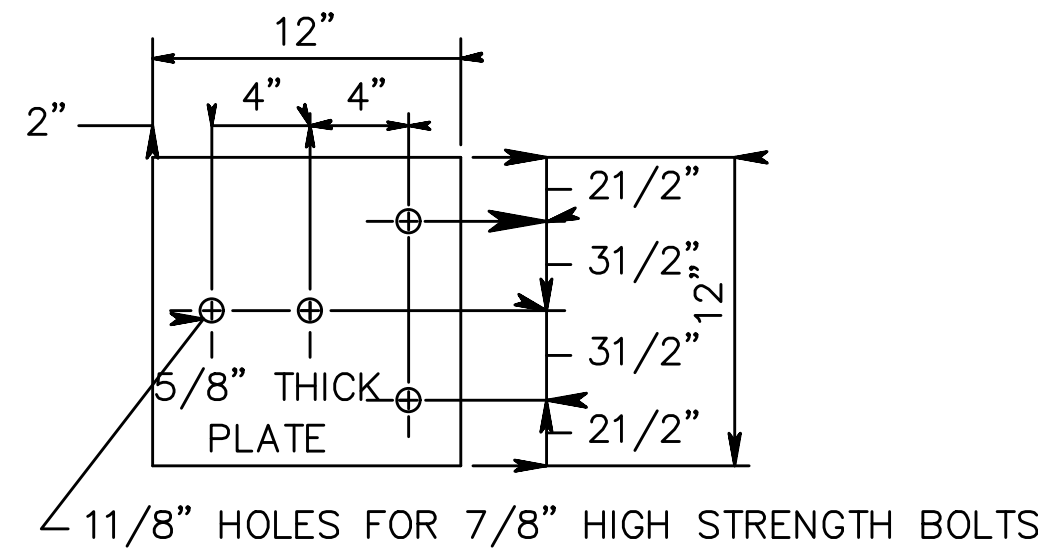


BACKUP PLATE FOR W-BEAM  
TERMINAL CONNECTOR

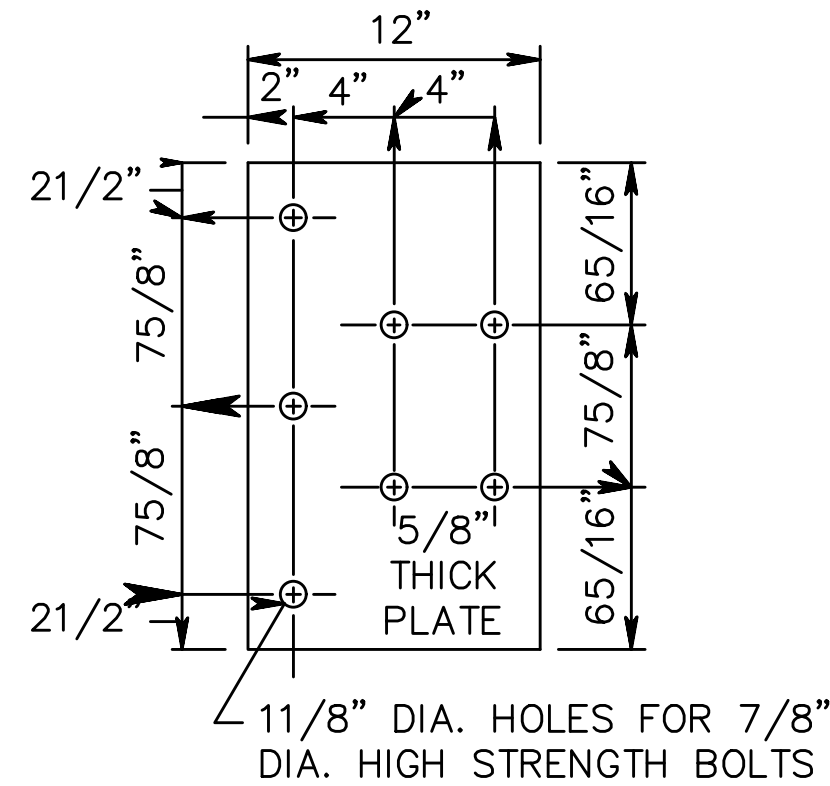


BACKUP PLATE FOR THRIE  
BEAM TERMINAL CONNECTOR

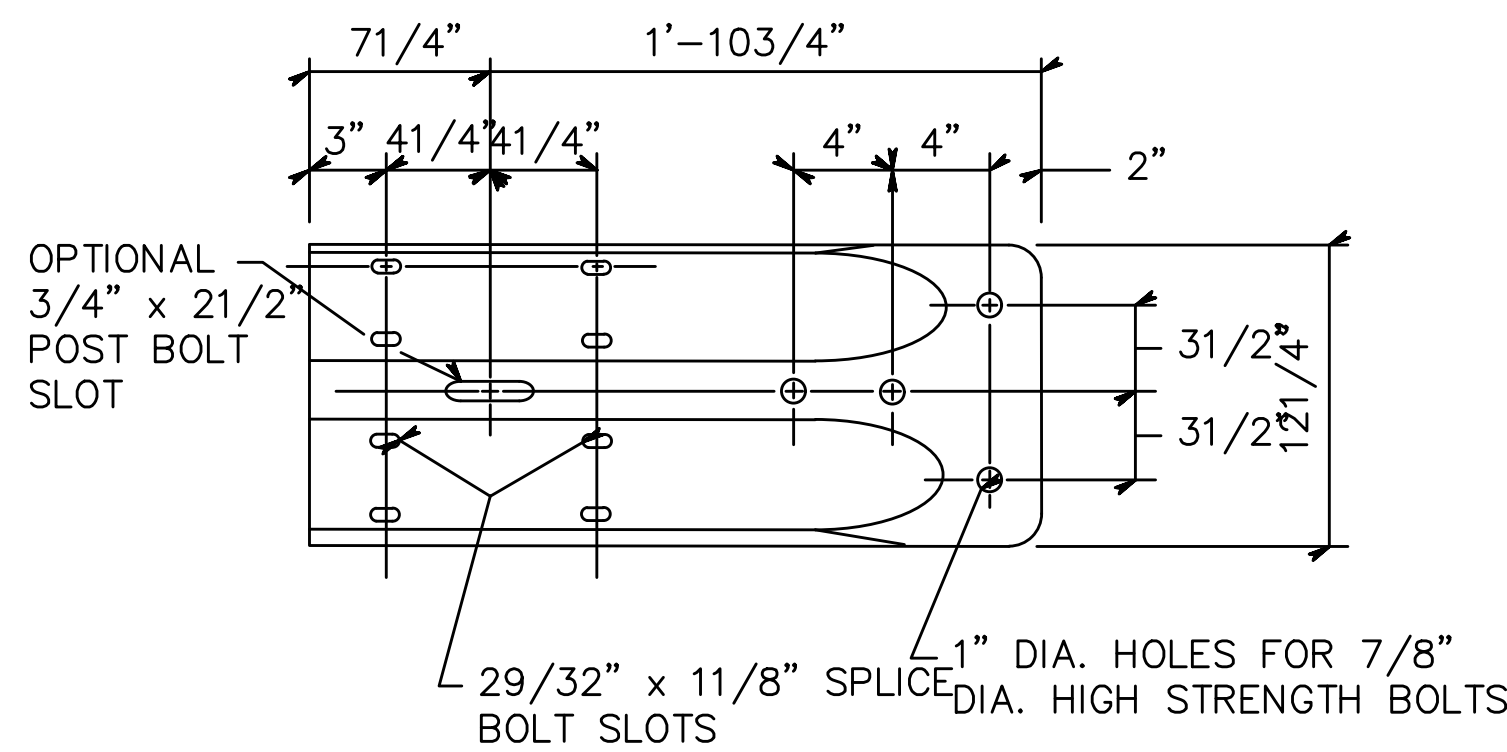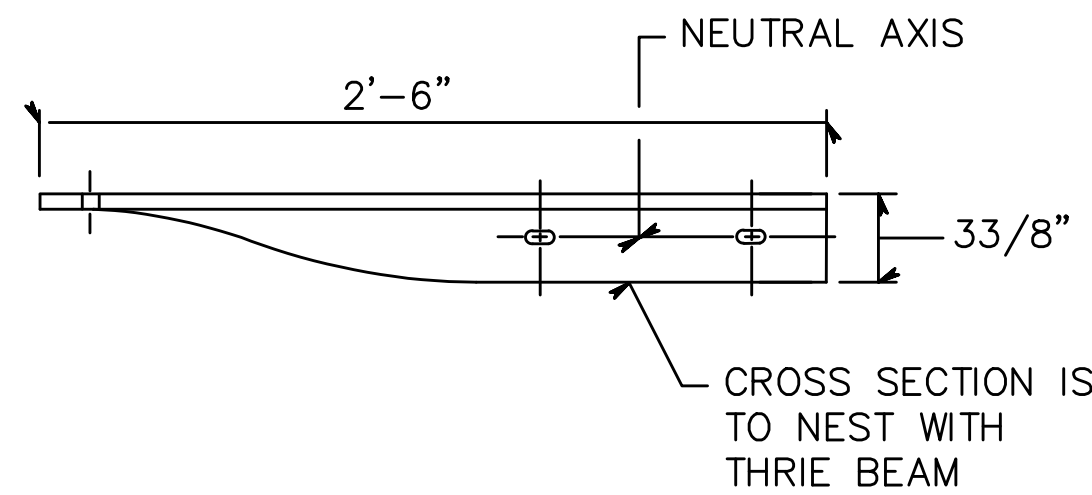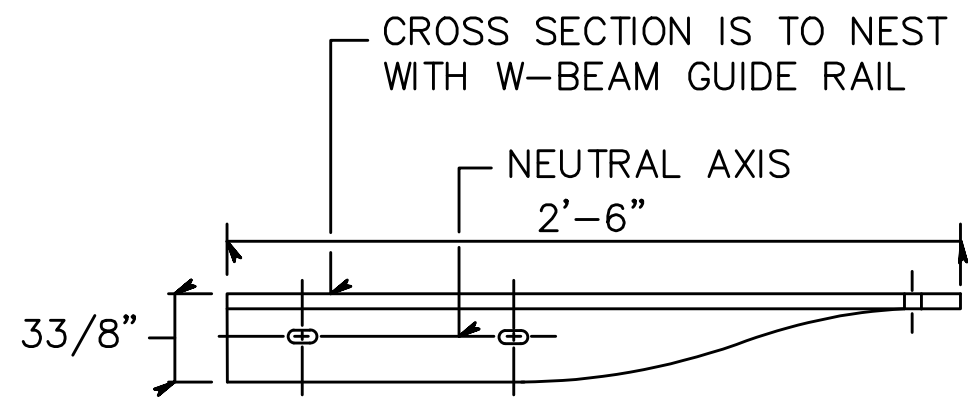

(AASHTO M180, CLASS B, TYPE 1) (10 GAUGE)  
W-BEAM TERMINAL CONNECTOR

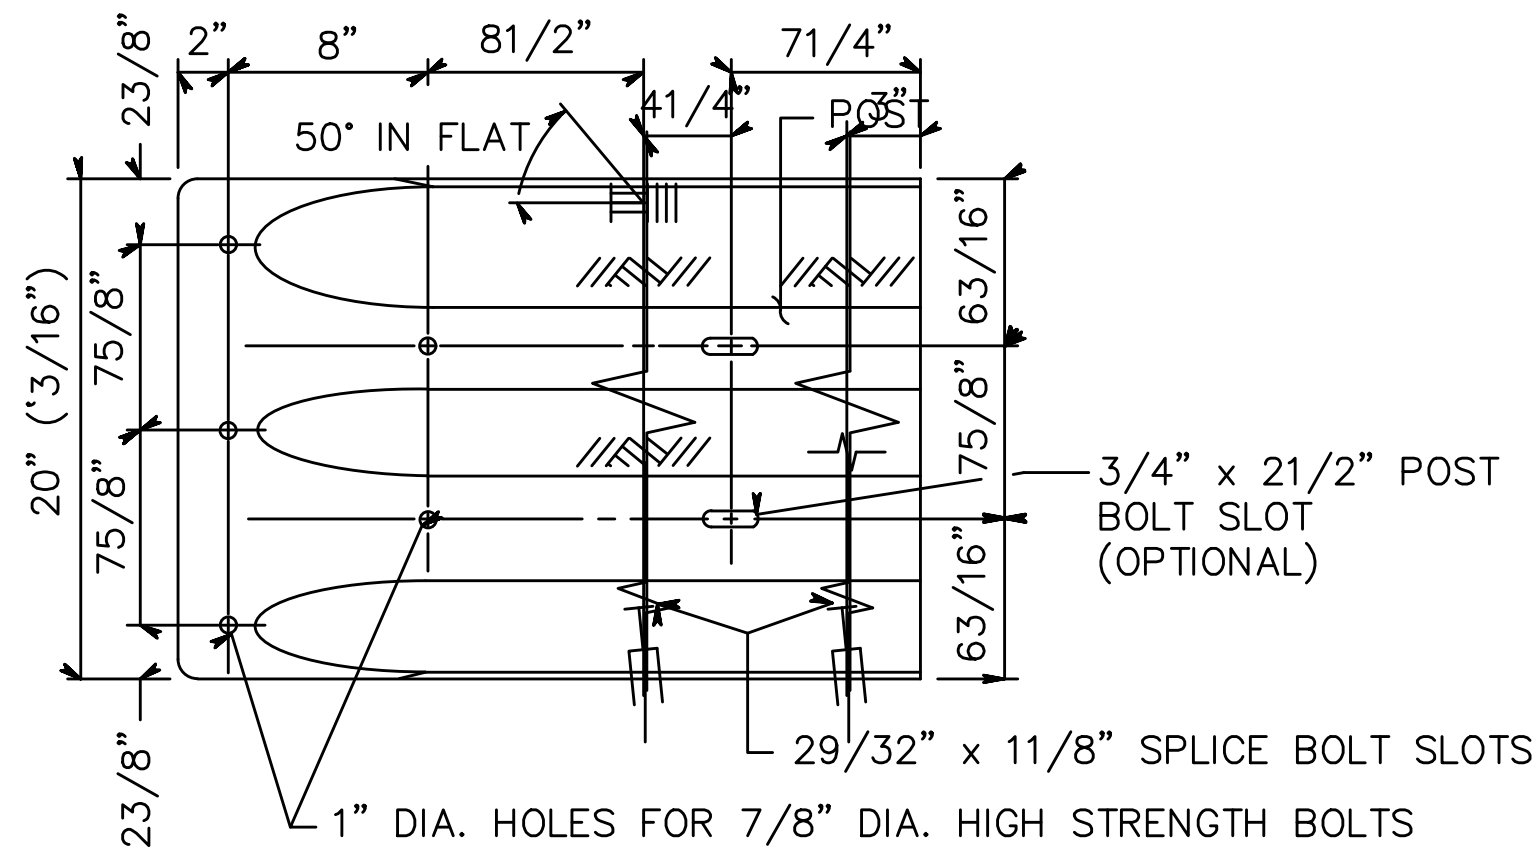


(AASHTO M180, CLASS B, TYPE 1) (10 GAUGE)  
THRIE BEAM TERMINAL CONNECTOR

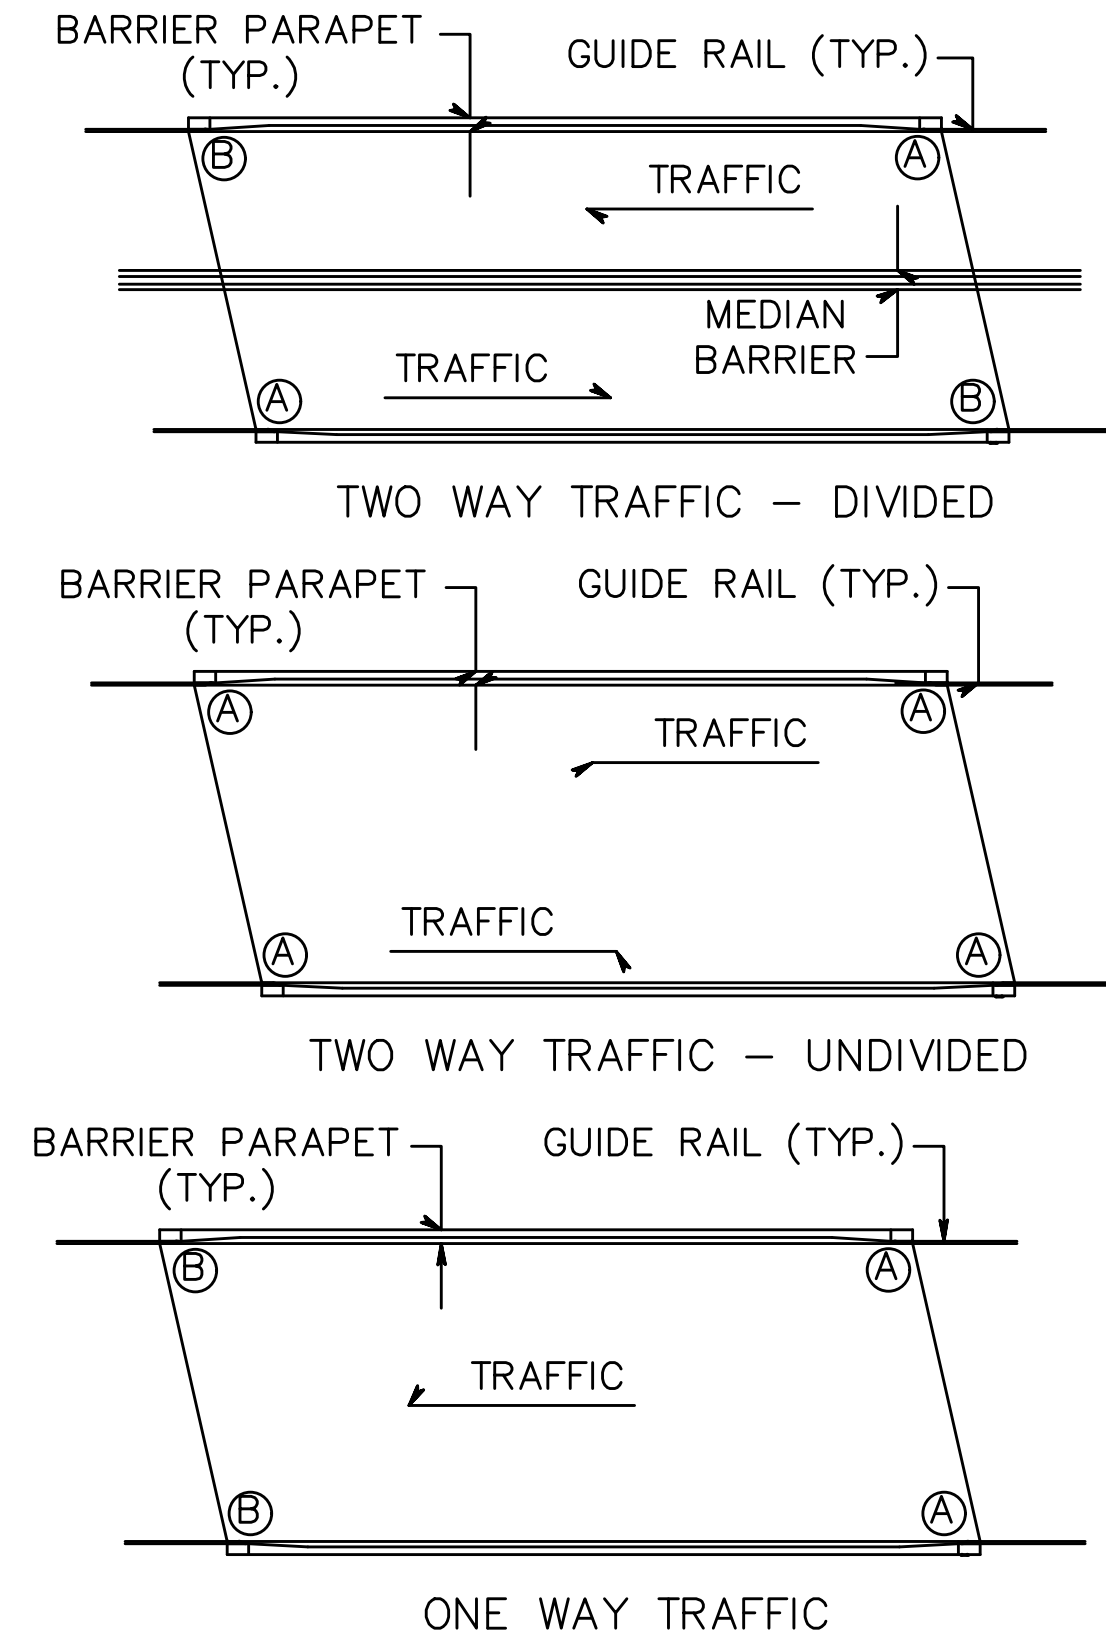


BRIDGE ATTACHMENT TYPES

NOTE:

DIMENSIONS SHOWN  
MAY VARY FOR  
RECYCLED/SYNTHETIC  
BLOCKOUTS.

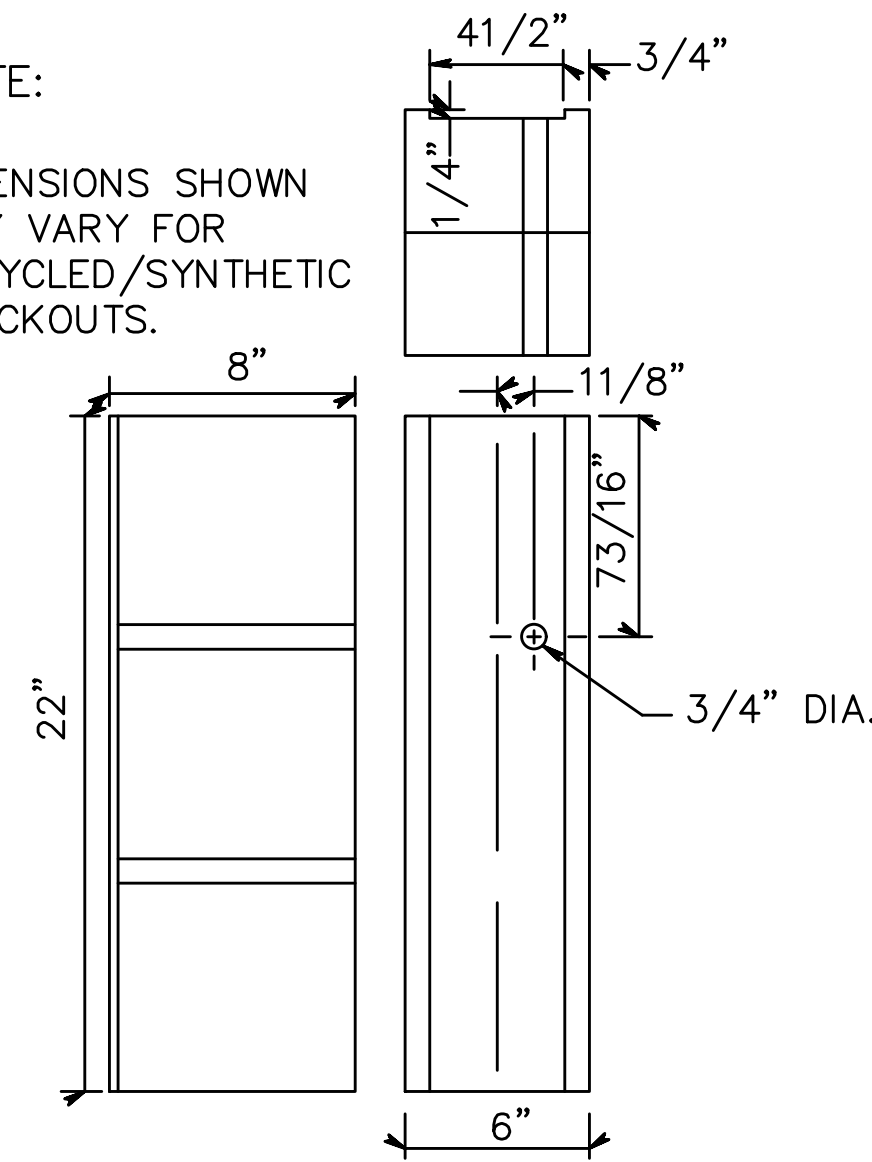

APPROVED RECYCLED/  
SYNTHETIC MATERIALS  
6"x8"x22" BLOCKOUT  
TL-2 ATTACHMENTS  
(CD-609-15A, 15B,  
16A, 17A, 17D, 17E)

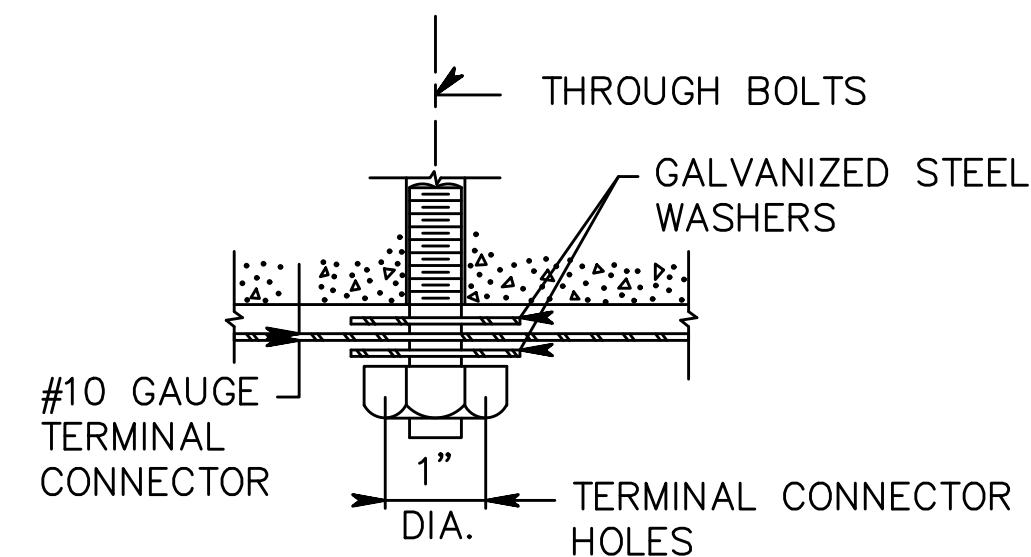

TERMINAL ANCHORAGE

GENERAL NOTES FOR TL-2 & TL-3 ATTACHMENTS (CD-609-14 THRU CD-609-17E)

- THIS GUIDE RAIL TRANSITION IS APPROPRIATE FOR CONNECTION TO A VERTICAL CONCRETE SHAPE AND SHOULD NOT BE CONNECTED DIRECTLY TO A CONCRETE SAFETY SHAPE. CONCRETE SAFETY BARRIER SHOULD BE TRANSITIONED TO A VERTICAL SHAPE AT THE GUIDE RAIL CONNECTION.
- FOR RECOMMENDED ATTACHMENT, REFER TO "BRIDGE ATTACHMENT TYPES", THIS SHEET.
- ALL CROSS SLOPES BETWEEN THE PAVEMENT EDGE AND POSTS TO BE 10H:1V OR FLATTER.
- EMBANKMENT MATERIAL CONFORMING TO THE NJDOT STANDARD SPECIFICATIONS SECTION 203 TO EXTEND AT A 2% SLOPE FOR A MINIMUM OF 2'-0" BEHIND THE POSTS AT WHICH POINT A SLOPE OF NO STEEPER THAN 2H:1V SHOULD EXTEND A MINIMUM OF 4'-0" FURTHER.
- LOCATE DRAINAGE INLETS AND ELECTRICAL JUNCTION BOXES ON APPROACHES SO AS NOT TO INTERFERE WITH GUIDE RAIL POST SPACING.
- STRUCTURAL STEEL PLATES AND SHAPES TO CONFORM TO AASHTO M270 AND BE GALAVANIZED PER AASHTO M111.
- HIGH STRENGTH STEEL BOLTS, NUTS AND WASHERS TO CONFORM TO AASHTO M164. ZINC COATED BOLTS, NUTS AND WASHERS TO BE TREATED ACCORDING TO AASHTO M232M.
- THE THICKNESS OF THRIE-BEAM AND W-BEAM RAIL ELEMENTS IS 12-GAUGE UNLESS OTHERWISE NOTED.
- FOR ADDITIONAL THRIE BEAM AND W-BEAM DETAILS REFER TO CD-609-1 AND CD-609-18.
- CONCRETE LIP CURB TO BE PAID UNDER 9"x16" CONCRETE VERTICAL CURB (SEE CD-607-1.9).
- W-BEAM AND THRIE BEAM TERMINAL CONNECTORS USE AASHTO M180 MECHANICAL PROPERTIES FOR BEAM & TRANSITION SECTIONS.

GENERAL NOTES FOR TL-3 ATTACHMENTS (CD-609-14, 15, 16, 17, 17B & 17C)

- AT TYPE (A) ATTACHMENTS, THRIE BEAM RAIL ELEMENT WILL REQUIRE ADDITIONAL RAIL BOLT SLOTS FOR POST #1, #3, #5, #7 AND #9. HOLES ARE TO BE SHOP PUNCHED OR DRILLED BEFORE GALVANIZATION. NO FIELD DRILLING IS PERMITTED.
- POSTS 1 THRU 6 TO BE 7'-2" LONG WITH 4'-10" POST EMBEDMENT. POSTS 7 THRU 12 TO BE 6'-0" LONG WITH 3'-8" POST EMBEDMENT.
- WHEN THE CONFIGURATION OF BRIDGE ABUTMENTS AND WINGWALLS DO NOT ACCOMMODATE THE INSTALLATION OF POST 1, THE POST MAY BE ATTACHED TO THE ABUTMENT HEADER WITH THE USE OF A BASE PLATE.
- STRUCTURAL TUBE BLOCKOUTS ARE TO BE USED FOR POSTS 1 THRU 12.

BEAM GUIDE RAIL  
ATTACHMENTS  
(MASH TL-2 & TL-3)

N.T.S.


CD-609-13

NEW JERSEY DEPARTMENT OF TRANSPORTATION

CONSTRUCTION DETAILS

CD-609-13.1




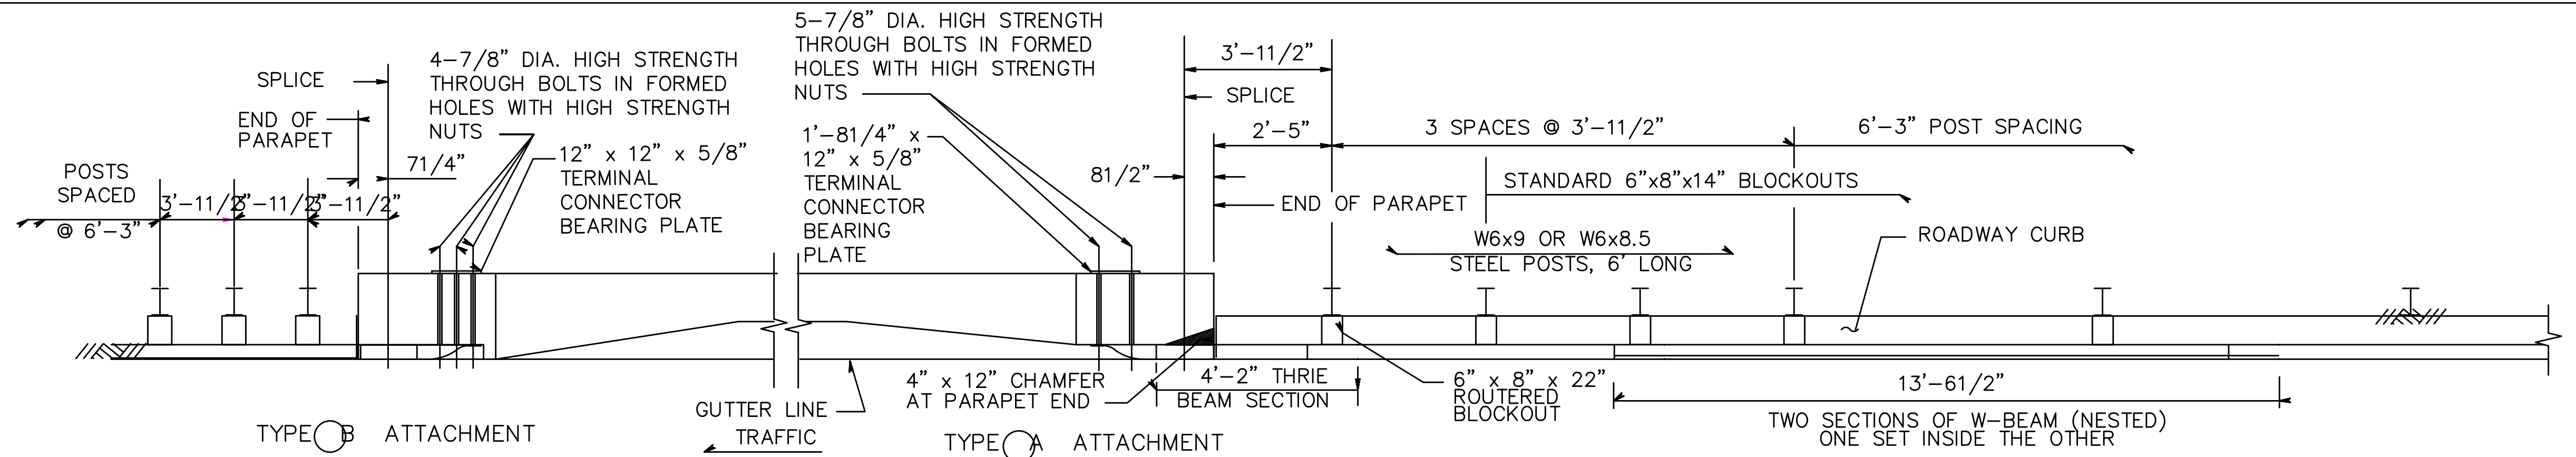




NOTES:

1. SEE CD-609-13 FOR ADDITIONAL NOTES AND DETAILS.
2. THE MINIMUM TAPER LENGTH IS BASED ON PARAPET HEIGHT. THE TAPER MUST BE 5:1 OR FLATTER WITH 8:1 DESIRABLE. SEE BRIDGE PLANS FOR TAPER LENGTH.
3. REINFORCEMENT STEEL IS IN METRIC UNITS.
4. TRANSITION LAST 10 FEET OF ROADWAY CURBING TO MATCH BARRIER PARAPET SHAPE.
5. FOR ADDITIONAL PARAPET DETAILS & DIMENSIONS, SEE BCD-507-3.4.

PLAN

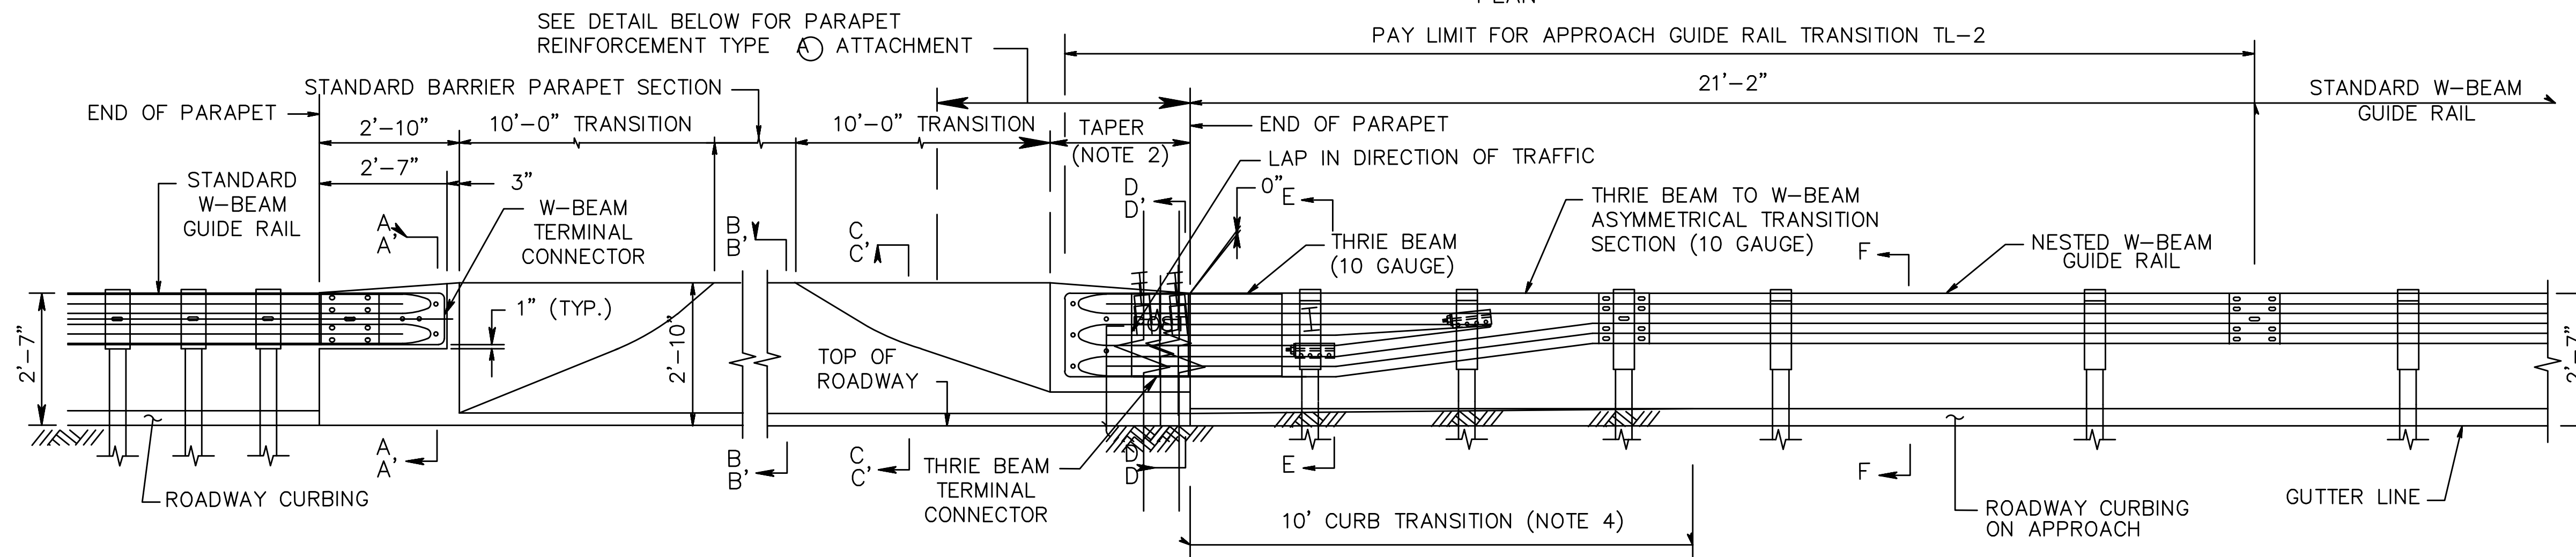

ELEVATION

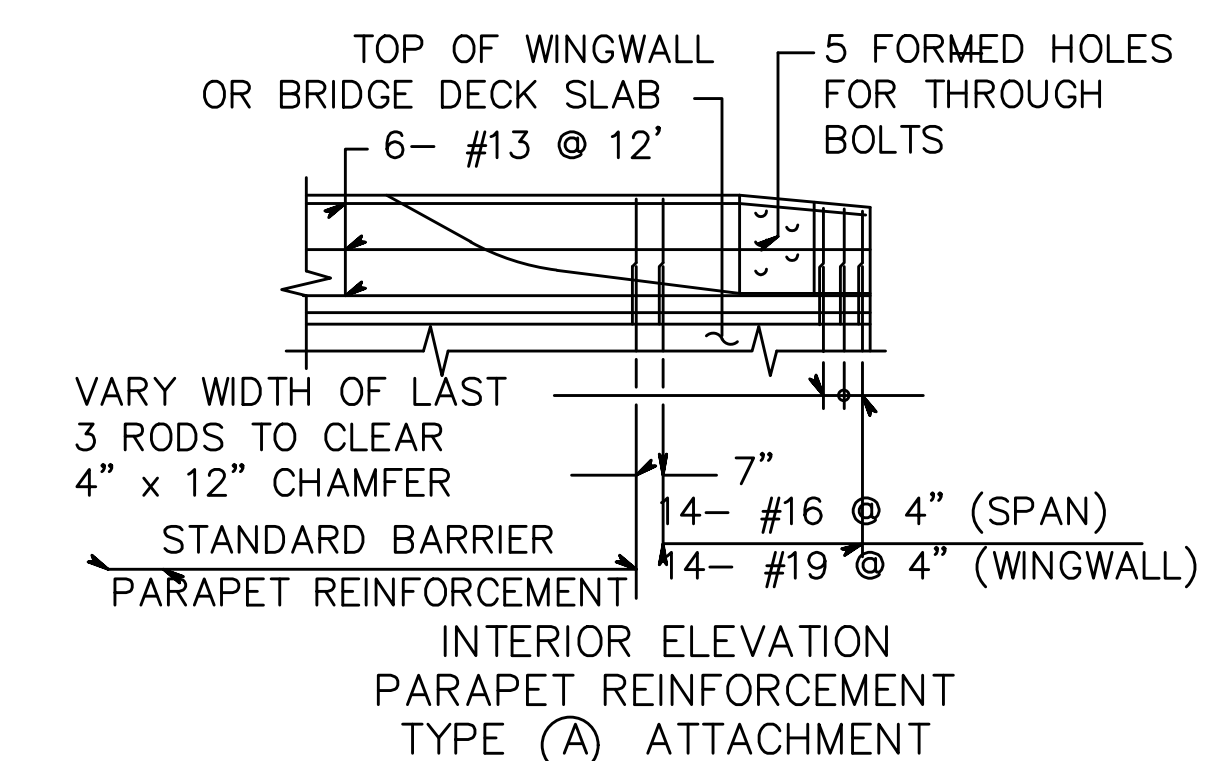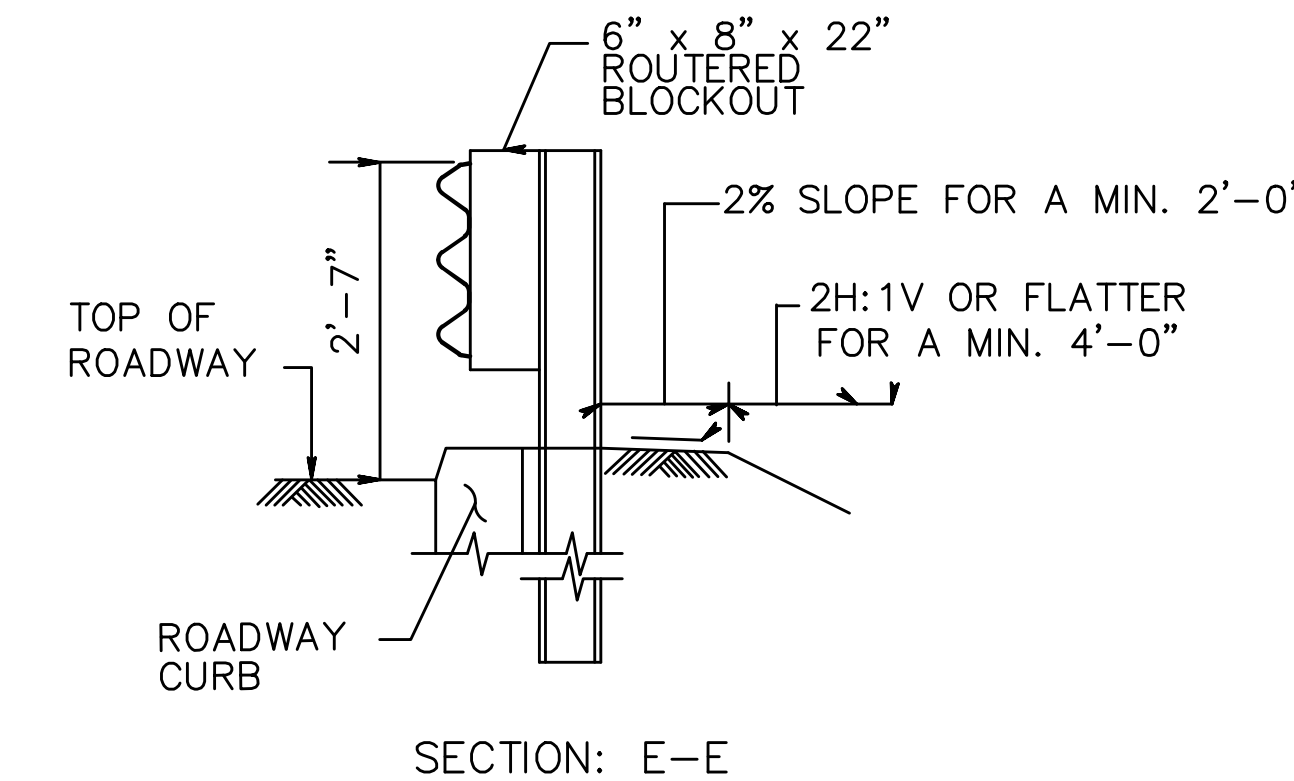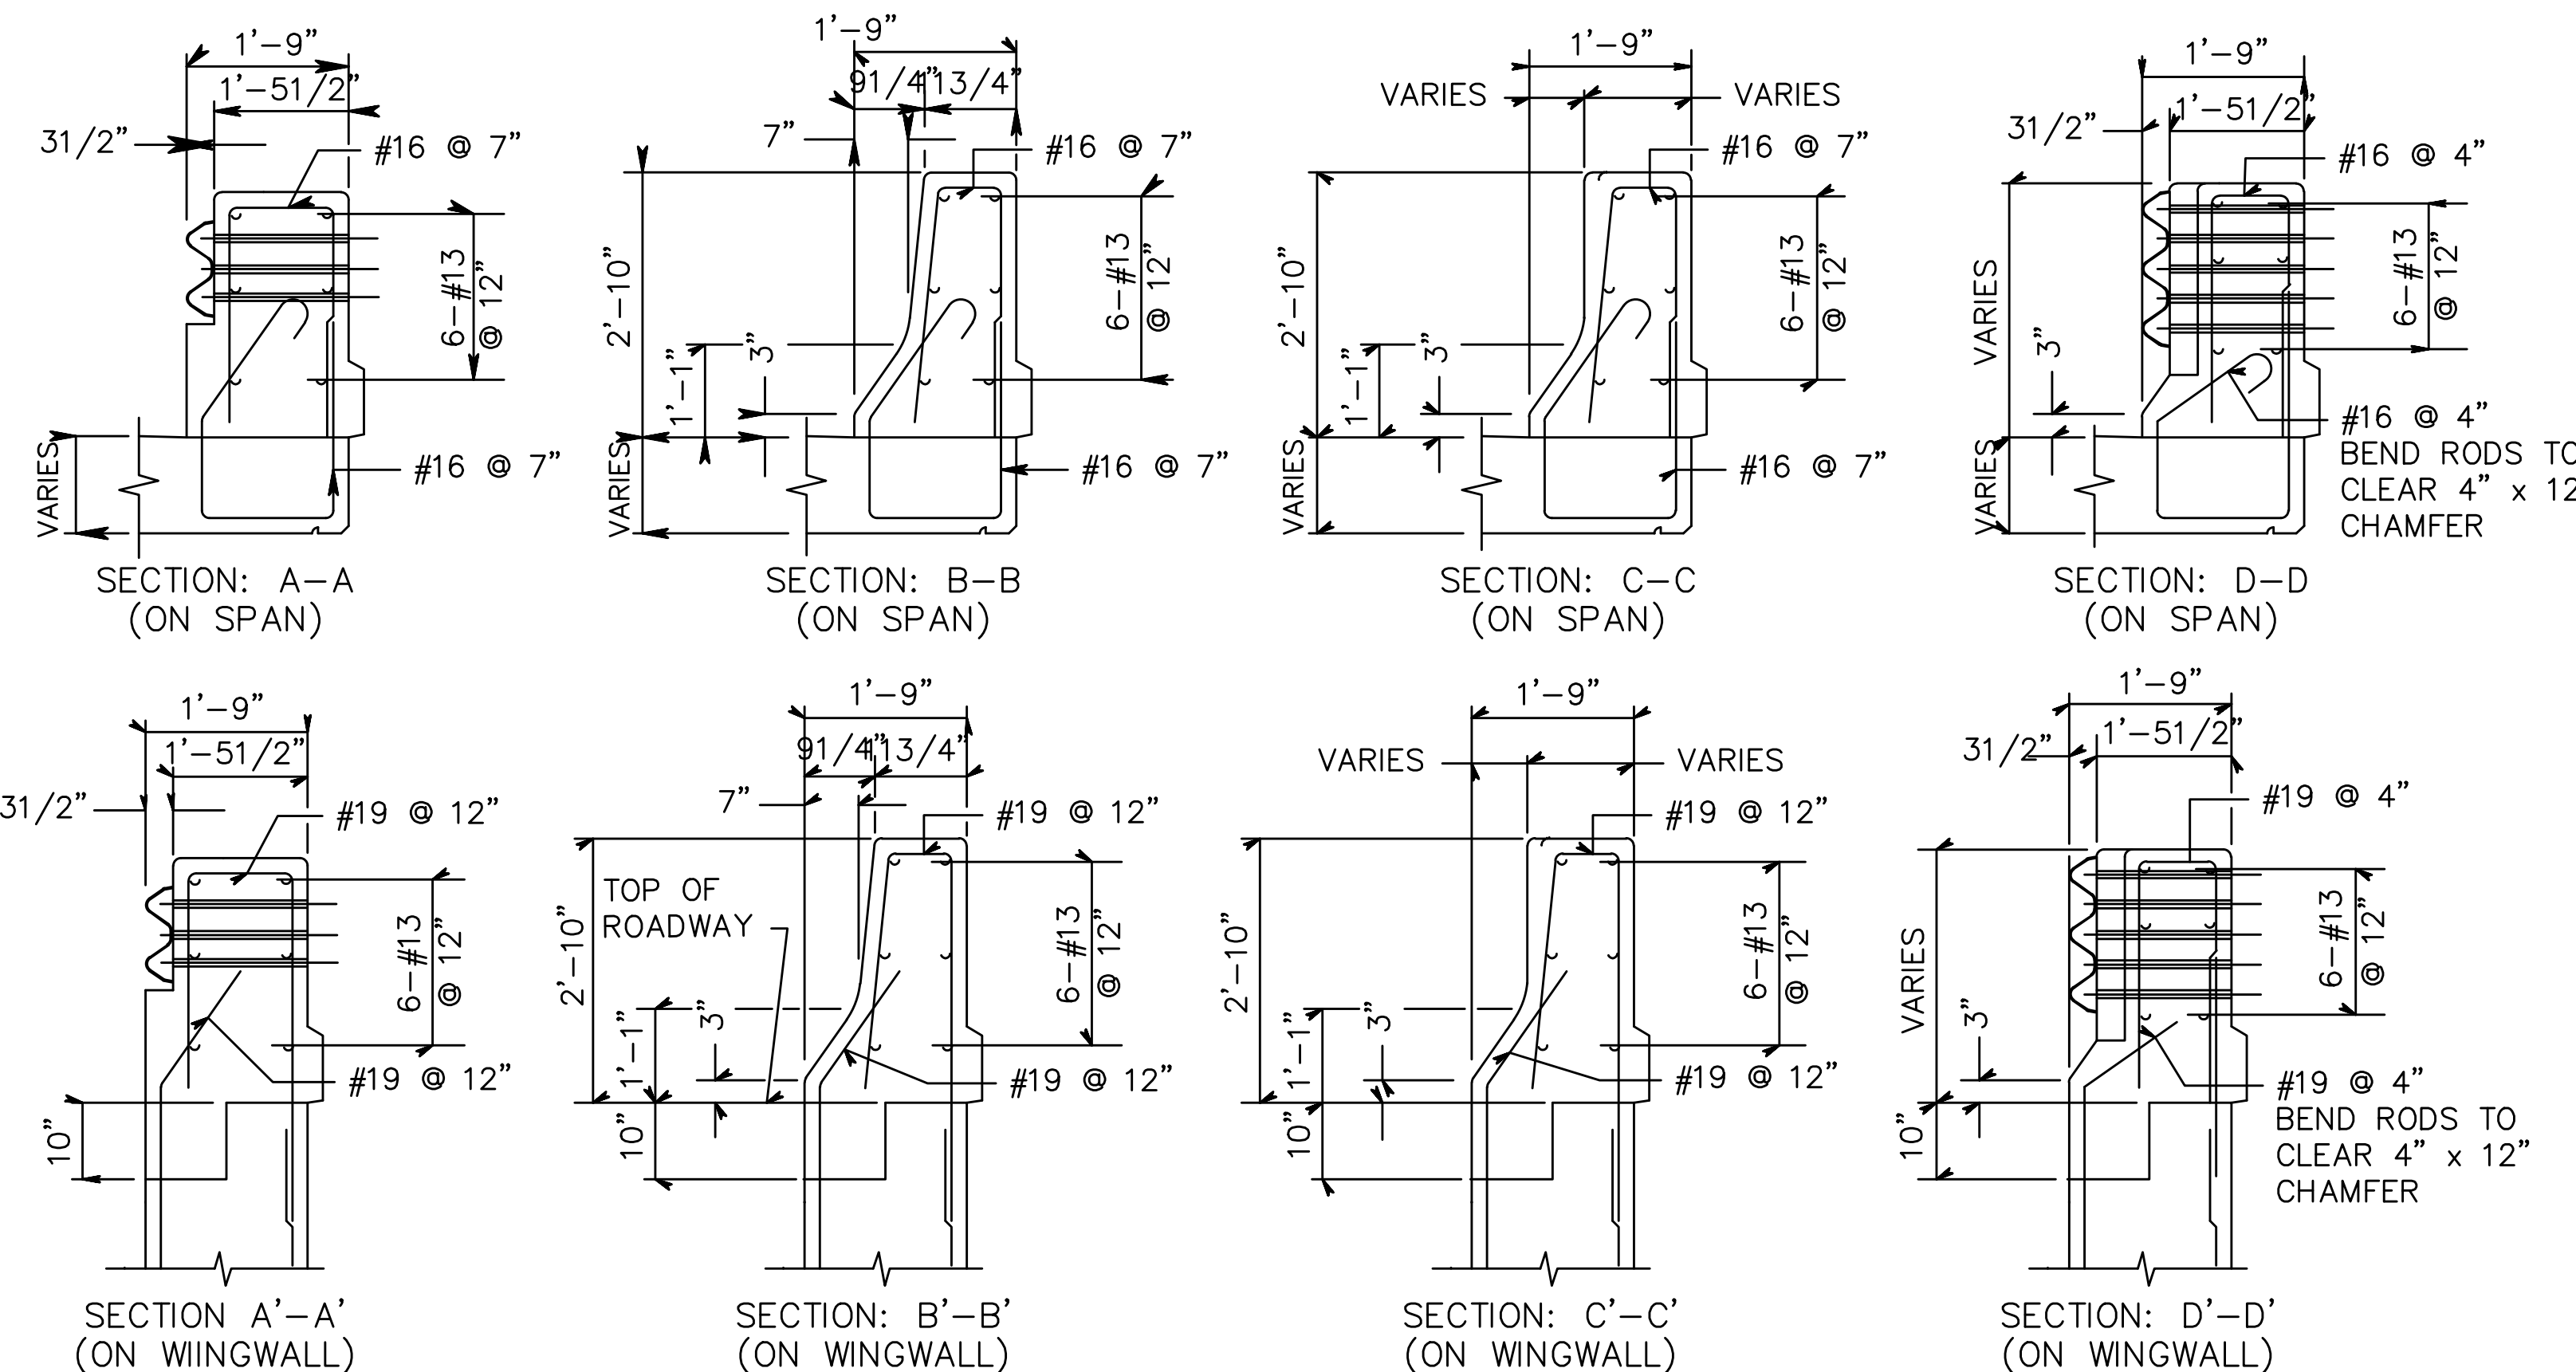

BEAM GUIDE RAIL ATTACHMENTS

N.T.S.

CD-609-17E

NEW JERSEY DEPARTMENT OF TRANSPORTATION

CONSTRUCTION DETAILS

GUIDE RAIL ATTACHMENT - DESIGN SPEED 45 MPH OR LESS (MASH TL-2)  
EXISTING NJ BARRIER PARAPET (WITH ROADWAY CURBING ON APPROACH)

CD-609-17E.1