



GENERAL NOTES:

1. USE 4500 P.S.I. CONCRETE TO MEET N.J.D.O.T. STANDARDS.
2. SIX (6") INCH FACE TO BE PROVIDED ON CURB.
3. PROVIDE PREFORMED BITUMINOUS FIBER EXPANSION JOINTS, 1/2" THICK AT 20'.0" (MAX.) INTERVALS. PROVIDE TRANSVERSE JOINTS EVERY 10 FEET.
4. INSTALLATION OF CURB INCLUDES SAW CUTTING AND REPAIR OF EXISTING PAVEMENT UP TO 2 FEET OFF THE EDGE OF CURB.
5. REPAIR ANY LAWN, DAMAGED DURING CONSTRUCTION WITH IN-KIND MATERIALS AND THICKNESS.

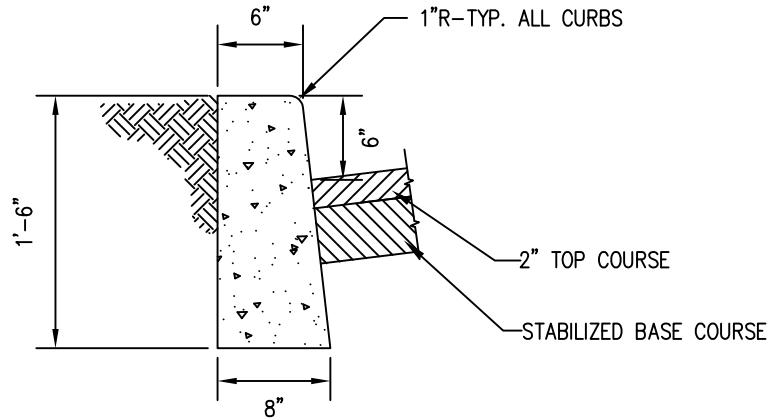

CONCRETE CURB DETAIL

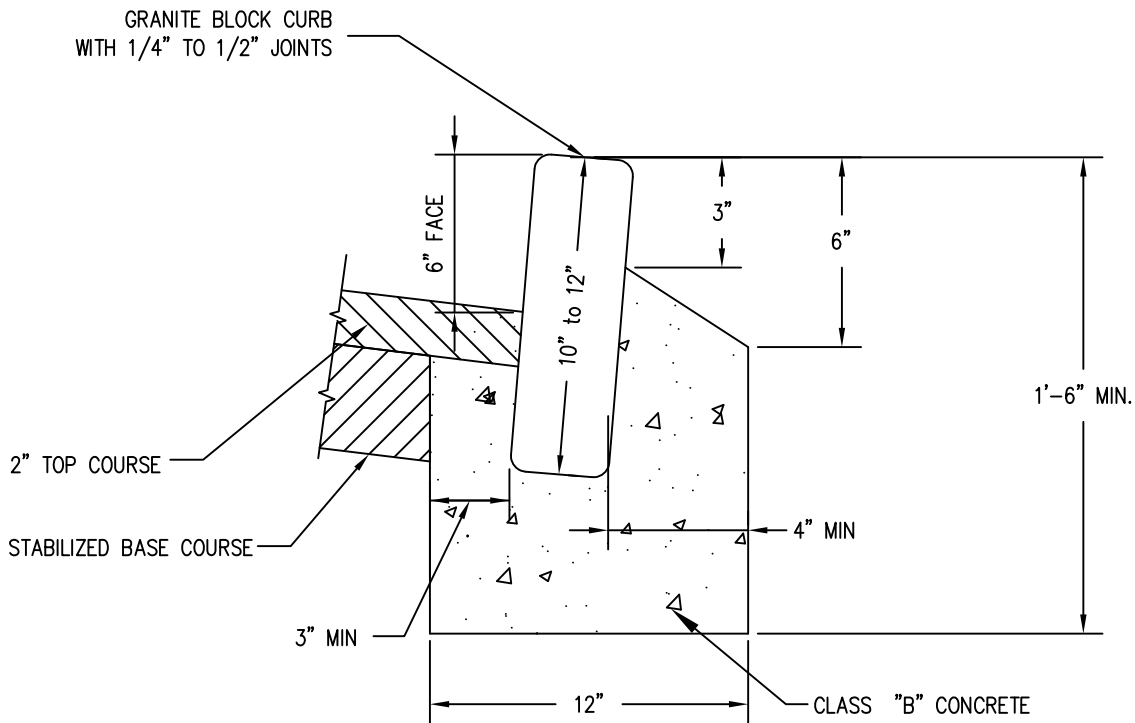

GRANITE CURB DETAIL

DESIGNED BY: C.D.A.	DRAWN BY: S.C.C / C.D.A.	CHECKED BY: R.A.M.
<p align="center">TOWNSHIP OF CRANFORD ENGINEERING DEPARTMENT ROOM 100 Township Municipal Building 8 Springfield Avenue, Cranford, N.J. 07016 Phone (908)709-7218 Fax (908)276-4872</p>		
UNION COUNTY		NEW JERSEY
<p align="center">Richard A. Marsden Jr. NJPE & PLS LIC. No. 29941</p>		